


STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS

APPENDIX A

SPECIFICATIONS AND PRICING
INFORMATION
FOR

PASSENGER VEHICLES & TRUCKS

2008 MODEL YEAR

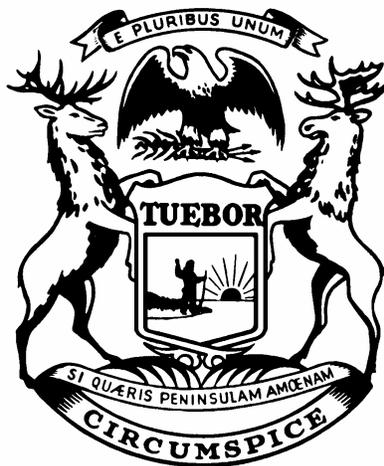

RED HOLMAN (MiDEAL)

Contract# 071B8200126

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

DESCRIPTION

MICH. SPEC. NO.

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

INDEX TO

SPECIFICATIONS FOR
2008 PASSENGER VEHICLES & TRUCKS

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>	<u>PAGE NO</u>
Passenger Vehicle Equipment	Preface	A
Truck Equipment	Preface	B-B1
Pre-Delivery Service	Preface	C-C1
Receiving Procedure	Preface	D

All vehicles must be new and of the manufacturer's current models in production at the time of delivery. All standard or optional equipment to be included shall be as advertised by the manufacturer (OEM) and factory installed and shall not consist of substitute or after market equipment. Special Edition Pricing Packages which may limit available options are not acceptable. Optional equipment not available from the factory may be dealer installed.

The dealer's vehicle order confirmation sheet listing all the standard options provided with the vehicle in accordance with the State of Michigan Specification shall be provided at each of these steps in the process:

- With dealers bid submittal to the State of Michigan**
- With original quote from the dealer to the customer**
- Upon delivery of the vehicle from the dealer to the customer**
- Customer shall use as a check list when accepting the vehicle to verify all ordered options are included on the vehicle**

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

DESCRIPTION

MICH. SPEC. NO.

**Diesel Vehicles are indicated with a “D” at the end of the specification number.
Alternative Fuel vehicles are indicated with a “A” at the end of the specification number.**

PASSENGER VEHICLES

Small, 4-Door Sedan, Auto. Trans.	3905-0002
Large-Size, 4-Door Sedan, Auto. Trans., F.W.D.	3905-0003
Alt Fuel - 4-Door Sedan, Auto. Trans.	3905-0003A
Mid-Size, 4-Door Sedan, Auto. Trans., F.W.D.	3905-0004
Large, Administrator Series, 4 -Door Sedan, Auto. Trans.	3905-0005

STATION WAGONS

5-Passenger, Auto. Trans., 4 door	3905-0017
-----------------------------------	-----------

Multi Functional Utility Vehicle,

5 Passenger, 4-Door, Auto. Trans., 4 door	3905-0018
Alt Fuel - 5 Passenger, Auto. Trans., 4 door	3905-0018A
6-7 Passenger, 4-Door, Auto. Trans.	3905-0019

TRUCKS, LIGHT DUTY

Pick-Up, 7 Ft. Box, Standard Cab, Payload – 1,000 lbs., min.	3958-0020
Pick-Up, 6 Ft. Box, Extended Cab, Payload - 1,260 lbs., min.	3958-0023
Pick-Up, 6 Ft. Box, Payload - 1,600 lbs., min., “Work Truck”	3958-0025
Pick-Up, 8 Ft. Box, Standard Cab, Payload - 1,600 lbs., min.	3958-0026
Alt Fuel -Pick-Up, 8 Ft. Box, Standard Cab, Payload - 1,600 lbs., min.	3958-0026A
Pick-Up, 8 Ft. Box, Extended Cab, Payload - 1,400 lbs., min	3958-0027
Alt Fuel - Pick-Up, 8 Ft. Box, Extended Cab, Payload - 1,400 lbs., min.	3958-0027A
Pick-Up, 6 Ft. Box, Extended Cab, Payload – 1,400 lbs., min	3958-0028
Alt Fuel - Pick-Up, 6 Ft. Box, Extended Cab, Payload – 1,400 lbs., min	3958-0028A

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
Pick-Up, 8 Ft. Box, Standard Cab, Payload - 3,240 lbs., min.	3958-0029
Diesel - Pick-Up, 8 Ft. Box, Standard Cab, Payload - 3,240 lbs., min.	3958-0029D
Pick-Up, 8 Ft. Box, Extended Cab, Payload - 3,000 lbs., min	3958-0030
Alt Fuel - Pick-Up, 8 Ft. Box, Extended Cab, Payload – 1,400 lbs., min.	3958-0030A
Diesel - Pick-Up, 8 Ft. Box, Extended Cab, Payload – 1,400 lbs., min.	3958-0030D
Pick-Up, 6 Ft. Box, Extended Cab, Payload - 3,000 lbs., min	3958-0031
Diesel - Pick-Up, 6 Ft. Box, Extended Cab, Payload - 3,000 lbs., min	3958-0031D

VANS, PASSENGER AND UTILITY

Panel Van, Payload - 1,700 lbs., min.	3958-0032
Utility Vehicle, 4 Door, 5-6 Passenger, Payload 1,500 lbs., min.	3905-0034
Sport Van, 8 Passenger, Payload - 1,600 lbs., min.	3905-0035
Utility Vehicle, Large, 6-Passenger, Payload - 1,940 lbs., min.	3905-0036
Sport-Van, 12-Passenger, Payload - 2,649 lbs., min.	3905-0037
Panel Van, Payload - 3,100 lbs., min.	3958-0039
Van, 15-Passenger	3905-0040
Van, 7 Passenger, Compact, Front Wheel Drive	3905-0042
Alt Fuel -Van, 7 Passenger, Compact, Front Wheel Drive	3905-0042A
Van, Cargo, Compact, Front Wheel Drive	3958-0044
Van, 7 Passenger, Compact, Long Wheel Base, Front Wheel Drive	3905-0045
Alt Fuel -Van, 7 Passenger, Compact, Extended Body, Front Wheel Drive	3905-0045A

TRUCKS, LIGHT DUTY

Pick-Up, 6 Ft. Box, Crew Cab, 4 Dr., Payload – 3,800 lbs., min.	3958-0046
Diesel - Pick-Up, 6 Ft. Box, Crew Cab, 4 Dr., Payload – 3,800 lbs., min.	3958-0046D

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
Pick-Up, 8 Ft. Box, Std. Cab, Dual Rear, Payload - 5,000 lbs., min.	3958-0047
Diesel - Pick-Up, 8 Ft. Box, Std. Cab, Dual Rear, Payload - 5,000 lbs., min.	3958-0047D
Pick-Up, 8 Ft. Box, Std. Cab, Single Rear, Payload - 4,200 lbs., min.	3958-0048
Diesel - Pick-Up, 8 Ft. Box, Std. Cab, Single Rear, Payld - 4,200 lbs.	3958-0048D
Pick-Up, 8 Ft. Box, Crew Cab, 4 Dr., Payload – 3,800 lbs. min.	3958-0049
Diesel - Pick-Up, 8 Ft. Box, Crew Cab, 4 Dr., Payload – 3,800 lbs. min.	3958-0049D
Pick-Up, 8 Ft. Box, Extended Cab, 4 Dr., Dual Rear	3958-0050
Diesel - Pick-Up, 8 Ft. Box, Extended Cab, 4 Dr., Dual Rear	3958-0050D
Pick-Up, 8 Ft. Box, Extended Cab, 4 Dr., Single Rear	3958-0051
Diesel - Pick-Up, 8 Ft. Box, Extended Cab, 4 Dr., Single Rear	3958-0051D
 <u>VANS, COMMERCIAL</u>	
Van, Commercial, 10-Passenger, Raised Roof, Payload - 3,200 lbs., min.	3905-0057
Van, Commercial, Cargo, Raised Roof, Payload - 4,800 lbs., min.	3905-0058
 <u>TRUCKS AND BODIES, MEDIUM DUTY</u>	
Cab and Chassis, approx. 137" W.B., G.V.W.R. 10,000 lbs., Gas	3958-0072
Cab and Chassis, approx. 128" W.B., G.V.W.R. 12,500 lbs., Diesel	3958-0073
Dump Body and Hoist, 2 cu. yd.	3958-0074
Stake Body, 9 Ft.	3958-0075
Stake Body and Hydraulic Hoist, 9 Ft.	3958-0076
Cab and Chassis, approx. 152" W.B., Payload 5,500 lbs., min., Gas	3958-0077
Diesel - Cab and Chassis, approx. 152" W.B., Payload 5,500 lbs., min., Gas	3958-0077D
Cab and Chassis, approx. 152" W.B., Payload 6,675 lbs., min. Diesel	3958-0078
Stake Body, 12 Ft.	3958-0079

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
Stake Body and Hydraulic Hoist, 12 Ft.	3958-0080
<u>TRUCKS, LIGHT DUTY, 4X4</u>	
Utility Vehicle, 4 Door, Payload 900 lbs., min.	3958-0083
Alt Fuel - Utility Vehicle, 4 Door, 2 Wheel Drive, Payload – 900 lbs., min.	3958-0083A
Pick-Up, 7 Ft. Box, Standard Cab, Payload 1,000 lbs., min.	3958-0084
Utility Vehicle, 4 Door, 6 Passenger, Payload 1,480 lbs., min.	3958-0085
Pick-Up, 8 Ft. Box, Extended Cab, Payload - 1,300 lbs., min.	3958-0086
Alt Fuel - Pick-Up, 8 Ft. Box, Extended Cab, Payload - 1,300 lbs., min.	3958-0086A
Pick-Up, 6 Ft. Box, Extended Cab, Payload - 1,300 lbs., min.	3958-0087
Alt Fuel -Pick-Up, 6 Ft. Box, Extended Cab, Payload - 1,300 lbs., min.	3958-0087A
Pick-Up, 8 Ft. Box, Extended Cab, Payload - 2,500 lbs., min.	3958-0088
Diesel - Pick-Up, 8 Ft. Box, Extended Cab, Payload - 2,500 lbs., min.	3958-0088D
Pick-Up, 6 Ft. Box, Extended Cab, Payload - 2,500 lbs., min.	3958-0089
Diesel - Pick-Up, 6 Ft. Box, Extended Cab, Payload - 2,500 lbs., min.	3958-0089D
Pick-Up, 6 Ft. Box, Standard Cab, Payload - 1,300 lbs., min.	3958-0090
Alt Fuel - Pick-Up, 6 Ft. Box, Standard Cab, Payload - 1,300 lbs., min.	3958-0090A
Pick-Up, 8 Ft. Box, Standard Cab, Payload - 1,300 lbs., min.	3958-0091
Alt Fuel - Pick-Up, 8 Ft. Box, Standard Cab, Payload - 1,300 lbs., min.	3958-0091A
Pick-Up, 8 Ft. Box, Standard Cab, Payload – 2,800 lbs., min.	3958-0092
Diesel - Pick-Up, 8 Ft. Box, Standard Cab, Payload - 2,800 lbs., min.	3958-0092D
Cab and Chassis, 10,000 Lb. G.V.W.R., Rear Duals	3958-0093
Diesel - Cab and Chassis, 10,000 Lb. G.V.W.R., Rear Duals	3958-0093D
Utility Vehicle, Large, 6 Passenger, Payload - 1,500 lbs., min.	3905-0094

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
Alt Fuel - Utility Vehicle, Large, 6 Passenger, Payload - 1,500 lbs., min.	3905-0094A
 <u>TRUCKS, MEDIUM DUTY, 4X4</u>	
Cab and Chassis, Body and Payload - approx. 13,000 lbs., min. 25,950 lbs. Min. G.V.W.R., Diesel engine	3958-0096
Cab and Chassis, approx. 137" W.B., G.V.W.R. 12,500 lbs., Diesel Payload 5,800 lbs., min.	3958-0098
Cab and Chassis, approx. 161" W.B., G.V.W.R. 12,500 lbs., Diesel Payload 5,930 lbs., min.	3958-0099
 <u>TRUCK, CUT-AWAY AND VAN BODY</u>	
Truck, Cut-Away, 8,900 lbs. G.V.W.R.	3958-0100
Truck, Cut-Away, 10,000 lbs. G.V.W.R	3958-0101
Van Body, Cut-Away Aluminum	3958-0102
Van Body, Cut-Away, Fiberglass Reinforced Plastic (F.R.P.)	3958-0103
Van, Full Body, Aluminum	3958-0104
Van, Full Body, Fiberglass Reinforced Plastic F.R.P.	3958-0105
Truck, Cut-Away, 11,000 lbs. G.V.W.R	3958-0108
Truck, Cut-Away, 14,000 lbs. G.V.W.R	3958-0109
 <u>TRUCKS AND BODIES, HEAVY DUTY</u>	
Cab and Chassis, approx. 128" W.B., G.V.W.R 14,500 lbs., Gas	3958-0110
Cab and Chassis, approx. 128" W.B., G.V.W.R 15,000 lbs., Diesel	3958-0111
Cab and Chassis, approx. 140" W.B., G.V.W.R 14,000 lbs. Gas, (4 x 4)	3958-0112
Cab and Chassis, approx 140" W.B., G.V.W.R 14,500 lbs., Diesel, (4 x 4)	3958-0113
Cab and Chassis, approx. 152" W.B., G.V.W.R 15,000 lbs., Gas	3958-0114
Cab and Chassis, approx. 152" W.B., G.V.W.R 15,000 lbs., Diesel	3958-0115
Cab and Chassis, approx 152" W.B., G.V.W.R 15,000 lbs., Gas, (4 x 4)	3958-0116

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
Cab and Chassis, approx 152" W.B., G.V.W.R 15,000 lbs., Diesel, (4 x 4)	3958-0117
Cab and Chassis, approx. 152" W.B., G.V.W.R 21,000 lbs.. Low Pro	3958-0134
Cab and Chassis, approx. 152" W.B., G.V.W.R 21,000 lbs.	3958-0135
Cab and Chassis, approx. 152" W.B., G.V.W.R 23,500 lbs., Diesel	3958-0136
Stake Body, 12 Ft.	3958-0137
Stake Body and Hydraulic Hoist, 12 Ft.	3958-0141
Dump Body and Hydraulic Hoist, 5-6 Yd.	3958-0158
Cab and Chassis, approx. 169" W.B., G.V.W.R 33,000 lbs. Diesel, 170 HP	3958-0160
Stake Body, 14 Ft.	3958-0161

TRUCKS AND BODIES, HEAVY DUTY

Cab and Chassis, approx. 217" W.B., G.V.W.R 27,000 lbs. Diesel, 210 HP	3958-0164
Van Body, 20 Ft., Aluminum	3958-0165
Van Body, 20 Ft., Fiberglass Reinforced Plastic, F.R.P.	3958-0167
Cab and Chassis, approx. 112" W.B., G.V.W.R 44,000 lbs., Diesel Single Axle	3958-0170
Dump Body and Hydraulic Hoist, 6.5 cu. yd.	3958-0171
Cab and Chassis, approx. 211" W.B., G.V.W.R 64,000 lbs., Diesel Tandem Axle	3958-0172
Cab and Chassis, approx. 177" W.B., G.V.W.R 52,000 lbs., Diesel Tandem Axle	3958-0173
Dump Body and Hydraulic Hoist, 10-12 cu. yd.	3958-0174

TRACTORS

70,000 lbs. G.C.W.R., Diesel Engine	3958-0178
-------------------------------------	-----------

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

<u>DESCRIPTION</u>	<u>MICH. SPEC. NO.</u>
<u>TAIL GATES</u>	
Hydraulic Power Tail Gate, 2,000 lbs. Capacity, 15,000 G.V.W.R., Conventional Type	3958-0215
Hydraulic Power Tail Gate, 3,000 lbs. Capacity, 20,000 G.V.W.R., Conventional Type	3958-0216
Hydraulic Power Tail Gate, 4,000 lbs. Capacity, 20,000 G.V.W.R., Conventional Type	3958-0217
Hydraulic Power Tail Gate, Various Capacities, 15,000 G.V.W.R., Stow Away Type	3958-0218
Hydraulic Tailgate, approx. 1,000 Lb. Capacity, 10,000 G.V.W.R. or less, (Step Van, Parcel Vans or Pick-Ups)	3958-0219
Hydraulic Tailgate, approx. 1,500 Lb. Capacity, (10,000 G.V.W.R. and smaller, stake body) Fold-Up Type Or Tuck-Away Type	3958-0220
Hydraulic Tailgate, 1,250 to 4,000 lb. Capacities, Rail Type	3958-0221

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

PASSENGER VEHICLE EQUIPMENT

The items listed below are to be supplied on all vehicles, even though they may be optional with the manufacturer. They have also been included in the individual specifications and are to be furnished on all vehicles:

See individual specifications for MDOT specific options.

Air Bag, Dual
Air Bags, Side (Standard on Ford vehicles only, not required for GM and Chrysler)
Air Conditioning.
Anti-freeze protection-to -30°F.
Battery-Maximum CCA available.
Brakes-Anti Locking System (ABS)
Color-Manufacturers Standard Color to be selected.
Defroster-Electric, rear window.
Floor Mats-Mfg. Stnd. , front and rear, color coordinated.
Glass-Tinted, all around.
Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
Lights, Daytime Running (If available from manufacturer as standard equipment)
Mirror-Right-hand, outside (factory installed).
Moldings-Body side; if not independently available, but available only as a portion of a package, they may be dealer installed using "original equipment" as available from the manufacturer.
Pre-delivery inspection and servicing.
Radio-AM/FM mfg. standard, factory installed.
Rear Axle Ratio for maximum mileage in highway driving.
Seats; Front, Split Bench or Bucket Type
Speed Control, factory installed
Steering-Power, Tilt Wheel.
Tires, Radial, Manufacturers Standard
Upholstery, Seats - Cloth or Cloth and Vinyl.
Wipers, Windshield - dual, intermittent, electric with automatic type washers.

**ALL VEHICLES MUST BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE
FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS.**

Note: No dealer advertising decals are to be on vehicle.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

TRUCK EQUIPMENT

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. They have also been included in the individual specifications and are to be furnished on all vehicles:

See individual specifications for MDOT specific options.

12 Volt auxiliary outlet

Air Conditioning - All trucks

Anti-freeze protection, to -30°F.

Arm Rest-Driver's side.

Color-Manufacturers Standard to be selected.

Coolant System-Maximum Size Available, including the Heaviest Duty Radiator

Dome Light.

Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.

Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.

Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".

Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.

Keys-(2) sets with code numbers; shall be with vehicle at time of delivery. (Three sets for MDOT)

Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

TRUCK EQUIPMENT (Continued)

Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.

Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.

Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.

Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.

Pre-delivery inspection and servicing.

Radio - AM/FM Manufacturers Standard, Factory Installed

Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)

Seats-Split Bench type, unless otherwise specified

Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.

Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.

Speed Control, Factory Installed

Steering-Power, Tilt Wheel

Sun visors-dual.

Jack-Furnish on trucks up to and including 12,000 G.V.W.R.

Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

PRE-DELIVERY SERVICE

The term "Pre-Delivery Service and Inspection" as used in State of Michigan Specifications includes the following:

1. General appearance of body both interior and exterior for completeness and quality of workmanship.
2. Lubrication and fluid levels and correcting any leaks:
 - a. Radiator
 - b. Windshield Washer
 - c. Battery
 - d. Power steering pump
 - e. Brake master cylinder
 - f. Engine oil
 - g. Transmission fluid level.
3. Mechanical operation of vehicle:
 - a. Steering gear and linkage
 - b. Suspension assembly, front and rear
 - c. Proper tire pressure to normal rated road requirements
 - d. Hood latch
 - e. Head lights, aim and adjust
 - f. Front wheel toe in and torque wheel nuts
 - g. Seat and shoulder belts operative
 - h. All locks and latches to be operative
 - i. Windshield wiper and washer to be operative
 - j. Proper adjustment to all drive belts
4. A check of all electrical operations to include: headlights, side marker lights, temperature, alternator, oil pressure lights, parking lights, stop and tail lights, directional signals, emergency flasher and parking brake lights.
5. **Miscellaneous items to be furnished:**
 - a. **Manufacturers Window Sticker shall not be removed from vehicle**
 - b. **Odometer Certification, and Vehicle Curb Weight at time of delivery**
 - c. **Manufacturers or Dealers Pre-Delivery Check Sheet**
 - d. **Vehicle shall have a Minimum of (4) Gallons of Fuel in tank when delivered**
 - e. **Warranty Plate and Operators Manual(s) shall be delivered with vehicle at no cost to the State of Michigan.**

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

PRE-DELIVERY SERVICE (Continued)

6. Deliveries shall be between the hours of 8 AM and 3 PM. No Weekend or Holiday Deliveries will be accepted. Forty-eight (48) hour notice required prior to delivery.

It is intended that vehicles delivered in accordance with the Michigan specifications will be complete, including mechanical details, general workmanship and appearance, and shall be delivered complete with all warranty service books and identification plate.

Failure to adhere to specifications may be reason to delay payment.

**STATE OF MICHIGAN
DEPARTMENT OF MANAGEMENT AND BUDGET
PURCHASING OPERATIONS**

RECEIVING PROCEDURE

It is important that all State agencies and departments carefully inspect all vehicles prior to signing the Freight Bill. If any vehicle is received in a damaged condition of component parts or accessories are missing, a notation of the discrepancy(ies) is to be made on the Freight Bill and then be signed by the driver who delivered the vehicles. A Complaint to Vendor Form should be initiated and sent to the vendor at once noting discrepancies. Failure to note obvious deficiencies at time of delivery on the Freight Bill may place the burden of repair on the receiving agency.

It is recommended that the following items be checked prior to signing the Freight Bill:

1. Visually inspect exterior of vehicle for paint, body, tire, tail light, antenna, outside rear view mirror and molding damage.
2. Visually inspect under hood for the following items:
 - a. Air cleaner
 - b. Battery and caps
 - c. Radiator cap
 - d. Windshield washer container.
3. Check for cracked or broken windows.
4. Check trunk compartment for the following:
 - a. Spare tire and wheel
 - b. Jack
 - c. Wheel wrench
 - d. Four hub caps
 - e. Trunk mat.
5. Check interior of vehicle for the following items:
 - a. Owner's manual and warranty material
 - b. Cigarette lighter
 - c. Two sets of keys (Three sets for MDOT)
 - d. Make sure all seat belts are installed
 - e. Sun visors
 - f. Upholstery damage or excessive soil.

It is the responsibility of the agency to check for any other items that could possibly have been missing in accordance with the purchase order and the specification data.

TRUCK: CAB AND CHASSIS DUAL REAR WHEELS
(G.V.W.R. 15,000 LBS., min.)

MODEL-2008 CURRENT NEW

	CHEV/GMC C4500 <u>C4C042</u>	FORD <u>F-450SD</u>	DODGE <u>DM4L64</u>
G.V.W.R. (lbs.)	16,500	16,000	16,500
Wheelbase (inches)	152	164.8	168.5
C.A. (inches)	84	84	84
Engine: Diesel	6.6L	6.4L	6.7L
Type & No. of Cylinders	V-8	V-8 Turbo	L-6 Turbo
Net H.P.-S.A.E.	300	325	305

Transmission: Automatic:
with maximum capacity transmission oil cooler. Factory installed.

Axle, Min. Cap.-lbs.			
Front	7,000	7,000	7,000
Rear	11,000	12,000	12,000
Springs, Min. Cap. at Ground			
Front-lbs. each	3,500	3,000	TBD
Rear-lbs. each	5,500	6,000	TBD

Tires, Truck, Tubeless, Radial, to meet G.V.W.R. Rear duals, mud and snow.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by

rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.

- ☑ Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- ☑ Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- ☑ Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- ☑ Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- ☑ Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- ☑ Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- ☑ Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- ☑ Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- ☑ Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- ☑ Pre-delivery inspection and servicing.
- ☑ Radio - AM/FM Manufacturers Standard, Factory Installed
- ☑ Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- ☑ Seats-Split Bench type, unless otherwise specified
- ☑ Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- ☑ Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- ☑ Speed Control, Factory Installed
- ☑ Steering-Power, Tilt Wheel
- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- Air Conditioning – Factory Installed
- Alternator- 80 amp., min.
- Battery-12 Volt, dual
- Brakes-Power.
- Fuel capacity-largest available from mfg.
- Mirrors-Rear View, Inside. Outside R.H. and L.H., below eye level, extended reach, swing away type, 51 sq. in., minimum. Installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: composite mirror heads
- Spare tire and wheel. GMC: Spare wheel only – No tire
- Steering-Power.
- Wrench-wheel. GMC: No wrench available

ADDITIONAL MDOT OPTIONS: (Note: These options are not included in the MiDEAL price)

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this MDOT vehicle.

- Axle Rear Limited slip
- Hubs autolocking on front GMC: locking hubs not available on 2 wd chassis
- Keys – (1) additional set (total of 3 sets) with code numbers; shall be with the vehicle at the time of delivery.
- Switches, upfitter for auxillary GMC: Panel only – switches available from body upfitter
- Throttle, Electronic, High Idle Engine RPM Control.
- Towing package: Heaviest duty available from manufacturer GMC: standard
- Trailer brake controller, factory installed GMC: not available

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS DUAL REAR WHEELS</u> (G.V.W.R. 15,000 LBS., min.) Mich. Spec. #3958-0115	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: C4500 F.O.B. - Dealership Delivery Cost Per Mile \$1.50	\$ 30,625.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
Zip: 48185	
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
 Spec # 3958-0115

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC4C042	2008 GMC TC4500 Regular Cab 2WD	\$28,890.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C4C042	CUSTOM/BASE MODEL	\$0.00
DIESEL ENGINE		
LRX	DURAMAX DIESEL 6.6L, 300 HP (223 KW) @ 3000 RPM, 520 LB-FT (705 N-M) TORQUE @ 1600 RPM	\$9,259.00
GVWR		
C7R	16,500 LBS. (7484 KG) CAPACITY	\$0.00
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
ALTERNATOR		
KG4	AD244, DELCO-REMY 150-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	INC
ENGINE SHUTDOWN		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-PASSENGER SIDE MOUNTED INSIDE FRAME RAIL	INC
POWER TAKE OFF		
PTX	OPTION PTO NOT REQUIRED	\$0.00
TRANSMISSION		
MBV	AUTOMATIC, ALLISON 1000 HS/RDS SERIES 6-SPEED	\$0.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
TRANSMISSION EQUIPMENT		
KNP	AUXILIARY TRANSMISSION OIL COOLER	\$95.00
FRONT AXLE		
FM7	7000 LBS. (3175 KG) CAPACITY	INC
FRONT SUSPENSION		
FK6	TAPERED LEAF, 7000 LBS. (3175 KG) CAPACITY	INC
FRONT WHEEL		
Q82	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$37.00
FRONT TIRE		
XTN	225/70R19.5F	\$0.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		
R3C	PREMIUM, HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		
GL4	SINGLE SPEED, 11,000 LBS. (4990 KG) CAPACITY	INC
AXLE RATIO		
008	4.88:1	\$0.00
REAR SUSPENSION		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: acibx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

<u>CATEGORY</u>	<u>Code</u>	<u>Description</u>	<u>MSRP</u>
REAR SUSPENSION			
	GR3	MULTI-LEAF, 11,000 LBS. (4990 KG) CAPACITY	INC
BOLTED OR RIVETED SUSPENSION			
	EV8	REAR SUSPENSION BRACKETS ARE RIVETED TO FRAME IN LIEU OF BOLTS	\$0.00
REAR SHOCK ABSORBER			
	SAN	REAR SHOCK ABSORBER NOT DESIRED	\$0.00
REAR WHEEL			
	Q83	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$74.00
REAR TIRE			
	YTN	225/70R19.5F	\$0.00
REAR TIRE BRAND			
	S4A	GOODYEAR	\$0.00
REAR TIRE TREAD			
	S3H	HIGHWAY TRACTION	\$0.00
SPARE WHEEL			
	SNF	FRONT	\$128.00
WHEELBASE			
	EG9	152" (386.1 CM)	\$163.00
FUEL TANK			
	NG6	DUAL, TOTAL FUEL CAPACITY OF 40-GALLONS (151L)	\$122.00
DRIVER CONVENIENCE PACKAGES			
	ZQ3	DRIVER CONVENIENCE PACKAGE	\$245.00
MISCELLANEOUS CAB EQUIPMENT			
	N33	TILT-WHEEL ADJUSTABLE STEERING	INC
	K34	CRUISE CONTROL,	INC
AIR CONDITIONING			
	C60	AIR CONDITIONING	\$852.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: acltix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
INSIDE REARVIEW MIRRORS		
D36	INSIDE DAY/NIGHT REARVIEW MIRROR	\$19.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$180.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$150.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
ADDITIONAL OPTIONS		
VQ1	FLEET PROCESSING OPTION	\$0.00
OPTIONS TOTAL		\$11,324.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbox@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

EXTERIOR

- Paint scheme, solid, upper color, Summit White
- Paint scheme, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimized wall to wall turn diameter painted argent
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

INTERIOR

- Seat, driver, high-back bucket, fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter vinyl or 69C Very Dark Pewter cloth)
- Trim console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Stepwell storage areas at each door front and rear. Includes storage cover.
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

MECHANICAL

- GVWR, 16,500 lbs. (7484 kg) capacity - GCWR limited to 24,000 lb. (10,866 kg) (Requires FM7 7000 lbs. (3175 kg) front axle) NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET). A New Law (Highway Transportation Bill HR3) was passed on August 10, 2005 - Check with IRS for guidelines
- Engine, Vortec 8.1L MD gasoline V8, 325 hp (239 kw) @ 4000 rpm and 450 lb-ft torque (610 N-m) @ 2,800 rpm. - Maximum engine speed 5000 rpm. Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry type
- Cooling, anti-freeze protection temperature - -40 degrees F (-40 degrees C)
- Road speed governor, controlled by the speed rating of the tires ordered. - which will be less than or equal to 85 mph (137 kph); 80 mph (129 kph) with EC9 128" wheelbase/60" CA, ML6 manual transmission and 008 4.88 rear axle ratio; 75 mph (120 kph) with EC9 128" wheelbase/60" CA, M74 automatic transmission and HD2 rear axle
- Alternator, AD244 Delco-Remy 150-amp maximum (N/A with YW2 wrecker package)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter, (Requires gasoline engine; N/A with ANQ Snow Plow Prep package or YW2 Wrecker package)
- Exhaust, single horizontal - passenger side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter, with diesel engines, stainless-steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Will delete transmission PTO gear.)
- Transmission, automatic, Allison 1000 HS/RDS Series 6-speed - With parking pawl and column shift, includes 4th Generation Electronic Controls and 0.61 overdrive. Torque Rating: 660 lb-ft (895 N-m) with shift energy management. Available with a Gross Vehicle Weight up to 19,500 lbs. (8845 kg) and a Gross Combination Weight Rating up to 26,000 lbs. (11,790 kg). To include PTO gear, please order with RPO PTO for Allison 1000 RDS Rugged Duty Series transmission. Includes transmission-oil cooler located inside radiator. With Option PTX the truck will be equipped with the Allison 1000 HS Highway Series transmission. (N/A with ANM Fire and Rescue or YF2 Ambulance Package)
- TranSynd synthetic automatic transmission fluid
- Front axle, 7000 lbs. (3175 kg) capacity - I-beam Wide-trac. Up to 53 degree turn angle, includes 4-piston brake apply calipers. Steering Gear Series: ZF8014
- Front suspension, tapered leaf, 7000 lbs. (3175 kg) capacity (includes stabilizer)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, 2" x 2" square tube (5 cm x 5 cm)
- Front wheels, 19.5" x 6.0" (49.5 cm x 15.2 cm), steel disc - 8-hole. 7280 lbs. (3302 kg) capacity
- Front tire size, 225/70R19.5F - 7280 lbs. (3802 kg) capacity, (With R4A Goodyear or R4L Michelin requires R3C front premium highway tread)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tread, premium, highway (Requires R4A Goodyear or R4L Michelin)
- Rear axle, single speed, 11,000 lbs. (4990 kg) capacity - full floating, Includes 2-piston brake applied calipers
- Rear wheel drive
- Rear axle ratio, 5.13:1 (Requires gasoline engine)
- Rear suspension, multi-leaf, 11,000 lbs. (4990 kg) capacity (Requires GL4 single speed rear axle)
- Rear suspension brackets are riveted to frame in lieu of bolts
- Rear shock absorber not desired (N/A with tapered leaf springs)
- Rear wheels, 19.5" x 6.0" (49.5 cm x 15.2 cm), steel disc - 8-hole. 14,560 lbs (6604 kg) capacity
- Rear tire size, 225/70R19.5F - 13,660 lbs. (6196 kg) capacity, (With S4A Goodyear, requires S3C rear premium highway tread or S3H rear traction tread; with S4L Michelin, requires S3C rear premium highway tread or S3J rear highway traction tread)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tread, premium, highway (Requires S4A Goodyear or S4L Michelin)
- Wheelbase, 128" (325.1 cm) - with 60" (152.4 cm) CA and 100" (254 cm) CE. Includes a 6 mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63 (Requires KYW 75 mph (120 kph) road speed governor and HD2 13,500 lbs. (6123 kg) capacity rear axle)
- Frame, 6mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Fuel tank, single, 25-gallon (95L) fuel capacity - gas or diesel located midship between the frame rails, with fuel fill neck through the frame rail (this option uses the mid-frame tank included in the NG6 dual tank option) Tethered fuel cap is black with gasoline engines, and green un-tethered fuel cap with diesel engines. MINIMUM OVERHANG = 36" (3 FEET) (Required in YW2 Wrecker Package, standard on 60" (152.4 cm) CA, optional on all other CA's)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C042 Regular Cab 2WD

- Fuel sender assembly, Robust fuel pump
- Tethered fuel cap
- Steering, power - ZF variable ratio power
- Brakes, front, power, 4-wheel disc, 4 channel ABS 2-piston - (See front axle options for more detail)
- Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See rear axle options for more detail)
- Parking brake, hand lever operated transmission mounted drum brake

SAFETY

- 4-wheel disc, 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included.
- This vehicle does not include any air bags
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.0, Data updated 12/11/2007 11:05:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 19, 2007 9:10:29 PM

Page 10



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac Gmc ITEM NO(s). Spec # 3958-0115
 MAKE OF TRUCK: Gmc MODEL: C4500 TC4C042GVWR 16500 lbs.
 PAYLOAD: 8799 W.B. 152" C.A. 84" C.E. 146"
 ENGINE: (GAS - DIESEL) Diesel MAKE: Gm Duramax MODEL: LRX, 6.6 SAE H.P. 300
 FUEL TANK(S) CAPACITY: 40 (GALS. TOTAL) TRANSMISSION: Allison 1000 MBV 6-spd
 SPRING CAP. @ GROUND EACH: FRONT 3500 lbs. REAR 5500 lbs. AUX. N/A lbs.
 AXLES: FRONT 7000 lbs. REAR 11000 lbs. REAR RATIO 4.88
 ALTERNATOR: 150 amps. BATTERY Dual 750 cca.
 TIRE SIZE: FRONT 225/70R19.5 F PR REAR 225/70R19.5 F PR SINGLE _____ DUAL M&S
 TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XTN/YTN
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS
(G.V.W.R. 15,000 LBS., min.) (4 x 4)

MODEL-2008 CURRENT NEW

	<u>CHEV/GMC</u> <u>C4C044</u>	<u>FORD</u> <u>F-450</u>
G.V.W.R. (lbs.)	17,500	16,000
Wheelbase (inches)	152	164.8
C.A. (inches)	84	84
Engine: Gasoline	8100	Triton
Type & No. of Cylinders	V-8	V-10
Net H.P.-S.A.E.	325	362

Transmission: Automatic:
with maximum capacity transmission oil cooler with P.T.O. Provision. Factory installed.

Axle, Min. Cap.-lbs.		
Front	8,000	7,000
Rear	13,500	12,000
Springs, Min. Cap. at Ground		
Front-lbs. each	4,000	2,800
Rear-lbs. each	6,750	6,000

Tires, Truck, Tubeless, Radial, to meet G.V.W.R. Rear duals, mud and snow.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by

rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.

- ☑ Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- ☑ Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- ☑ Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- ☑ Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- ☑ Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- ☑ Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- ☑ Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- ☑ Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- ☑ Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- ☑ Pre-delivery inspection and servicing.
- ☑ Radio - AM/FM Manufacturers Standard, Factory Installed
- ☑ Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- ☑ Seats-Split Bench type, unless otherwise specified
- ☑ Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- ☑ Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- ☑ Speed Control, Factory Installed
- ☑ Steering-Power, Tilt Wheel
- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- Air Conditioning – Factory Installed
- Alternator-80 amp., min.
- Battery-12 Volt, 600 CCA, minimum.
- Brakes-Power.
- Fuel capacity-largest available from mfg.
- Mirrors-Rear View, Inside. Outside R.H. and L.H., below eye level, extended reach, swing away type, 51 sq. in., minimum. Installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: Composite Mirror Heads
- Spare tire and wheel. GMC: Spare wheel only
- Steering-Power.
- Wrench-wheel. GMC: wrench not avail

ADDITIONAL MDOT OPTIONS: (Note: These options are not included in the MiDEAL price)

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this MDOT vehicle.

- Axle Rear Limited slip
- Hubs autolocking on front GMC: manual locking hubs only
- Keys – (1) additional set (total of 3 sets) with code numbers; shall be with the vehicle at the time of delivery.
- Switches, upfitter for auxillary GMC: Panel std – switches available from body upfitter
- Throttle, Electronic, High Idle Engine RPM Control.
- Towing package: Heaviest duty available from manufacturer GMC: Standard
- Trailer brake controller, factory installed GMC: Not availabe

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS</u> (G.V.W.R. 15,000 LBS., min.) (4 x 4) Mich. Spec. #3958-0116	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: C4500 <i>F.O.B. - Dealership</i> Delivery Cost Per Mile \$1.50	\$28,774.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
Spec # 3958-0116

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC4C044	2008 GMC TC4500 Regular Cab 4WD	\$35,860.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C4C044	CUSTOM/BASE MODEL	\$0.00
GASOLINE ENGINE		
LRW	VORTEC 8.1L MD GASOLINE V8, 325 HP (239 KW) @ 4000 RPM AND 450 LB-FT TORQUE (610 N-M) @ 2800 RPM.	\$0.00
GVWR		
GZX	17,500 LBS. (7938 KG) CAPACITY	INC
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
ROAD SPEED GOVERNOR		
KYW	75 MPH (120 KPH) SPEED GOVERNOR	INC
ALTERNATOR		
KG4	AD244, DELCO-REMY 150-AMP MAXIMUM	\$0.00
BATTERY		
TM1	SINGLE AC DELCO, 600 CCA, 12V	\$0.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-DRIVER SIDE MOUNTED INSIDE FRAME RAIL,	INC
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$225.00
TRANSMISSION		
MBV	AUTOMATIC, ALLISON 1000 HS/RDS SERIES 6-SPEED	\$0.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
TRANSMISSION EQUIPMENT		
KNP	AUXILIARY TRANSMISSION OIL COOLER	\$95.00
TRANSFER CASE		
NP1	NEW VENTURE GEAR-MODEL NV273 TWO-SPEED	INC
FRONT AXLE		
G38	8000 LBS. (3629 KG) CAPACITY	\$0.00
FRONT SUSPENSION		
FSN	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	\$0.00
FRONT STABILIZER BAR		
F59	STABILIZER BAR	INC
FRONT WHEEL		
Q82	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$0.00
FRONT TIRE		
XTY	245/70R19.5G	\$0.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		
R3H	HIGHWAY TRACTION	INC
SINGLE SPEED REAR AXLE		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
SINGLE SPEED REAR AXLE		
HD2	SINGLE SPEED, DANA S110 13,500 LBS. (6123 KG) CAPACITY	INC
AXLE RATIO		
058	5.13:1	INC
TRACTION CONTROL		
G80	REAR LIMITED SLIP DIFFERENTIAL	INC
REAR SUSPENSION		
GR4	MULTI-LEAF, 13,500 LBS. (6123 KG) CAPACITY	INC
BOLTED OR RIVETED SUSPENSION		
EV8	REAR SUSPENSION BRACKETS ARE RIVETED TO FRAME IN LIEU OF BOLTS	\$0.00
REAR SHOCK ABSORBER		
SAN	REAR SHOCK ABSORBER NOT DESIRED	\$0.00
REAR WHEEL		
Q83	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$0.00
REAR TIRE		
YTY	245/70R19.5G	\$0.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3H	HIGHWAY TRACTION	INC
SPARE WHEEL		
SNF	FRONT	\$128.00
WHEELBASE		
EG9	152" (386.1 CM)	\$0.00
FUEL TANK		
NH4	SINGLE, 40-GALLON (151L) FUEL CAPACITY	INC
PARKING BRAKE		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
PARKING BRAKE		
J69	REAR IN-WHEEL PARK BRAKE	INC
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$155.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$852.00
INSIDE REARVIEW MIRRORS		
D36	INSIDE DAY/NIGHT REARVIEW MIRROR	\$19.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$180.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$150.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
_V	VINYL SEAT TRIM	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
ADDITIONAL OPTIONS		
VQ1	FLEET PROCESSING OPTION	\$0.00
OPTIONS TOTAL		\$1,804.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

EXTERIOR

- Paint scheme, solid, upper color, Summit White
- Paint scheme, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimized wall to wall turn diameter painted argent
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 27, 2007 11:10:42 PM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

INTERIOR

- Seat, driver, high-back bucket, fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter vinyl or 69C Very Dark Pewter cloth)
- Trim console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Stepwell storage areas at each door front and rear. Includes storage cover.
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: acli@hotmai.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

MECHANICAL

- GVWR, 17,500 lbs. (7938 kg) capacity - GVWR. Maximum GCWR 26,000 lb. Note: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET). A New Law (Highway Transportation Bill HR3) was passed on August 10, 2005 - Check with IRS for guidelines
- Engine, Vortec 8.1L MD gasoline V8, 325 hp (239 kw) @ 4000 rpm and 450 lb-ft torque (610 N-m) @ 2,800 rpm. - Maximum engine speed 5000 rpm. Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry type
- Cooling, anti-freeze protection temperature - -40 degrees F (-40 degrees C)
- 75 mph (120 kph) speed governor - Required by the speed rating of the tires ordered
- Alternator, AD244 Delco-Remy 150-amp maximum (N/A with ANM Fire and Rescue or YF2 Ambulance Packages)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter, (Requires gasoline engine; N/A with ANQ Snow Plow Prep)
- Exhaust, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter, with diesel engines, stainless-steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Will delete transmission PTO gear.)
- Transmission, automatic, Allison 1000 HS/RDS Series 6-speed - With parking pawl and column shift, includes 4th Generation Electronic Controls and 0.61 overdrive. Torque Rating: 660 lb-ft (895 N-m) with shift energy management. Available with a Gross Vehicle Weight up to 19,500 lbs. (8845 kg) and a Gross Combination Weight Rating up to 26,000 lbs. (11,790 kg). To include PTO gear, please order with RPO PTO for Allison 1000 RDS Rugged Duty Series transmission. Includes transmission-oil cooler located inside radiator. With Option PTX the truck will be equipped with the Allison 1000 HS Highway Series transmission. (N/A with ANM Fire and Rescue or YF2 Ambulance Package)
- TranSynd synthetic automatic transmission fluid
- Transfer case, New Venture Gear - model NV273 two-speed, electrically actuated, IP mounted switch, includes shield
- Front axle, 8000 lbs. (3629 kg) capacity - Solid drive axle. Up to 45 degree turn angle, includes 4 piston brake apply calipers and manual locking hubs
- Front suspension, tapered leaf, 8000 lbs. (3629 kg) capacity

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, Solid bar style, 1.5" (38mm)
- Front wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 10,000 lbs. (4536 kg) capacity, (Requires Q83 steel rear wheel and XTY or XNC front tires)
- Front tire size, 245/70R19.5G - 9090 lbs. (4123 kg) capacity (Requires KYR 65 mph or KYW 75 mph (120 kph) road speed governor, Q82 or RPM front wheels. With R4A Goodyear tire, requires R3H highway traction tread)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tread, highway traction
- Rear axle, single speed, Dana S110 13,500 lbs. (6123 kg) capacity - full floating, includes 2-piston brake applied calipers
- Four-wheel drive
- Rear axle ratio, 5.13:1 (Requires HD2 single speed rear axle)
- Rear limited slip differential
- Rear suspension, multi-leaf, 13,500 lbs. (6123 kg) capacity
- Rear suspension brackets are riveted to frame in lieu of bolts
- Rear shock absorber not desired (N/A with tapered leaf springs)
- Rear wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 20,000 lbs. (9072 kg) capacity (Requires Q82 front wheels and YTY or YNC rear tires)
- Rear tire size, 245/70R19.5G - 17,500 lbs. (7938 kg) capacity (Requires KYR 65 mph or KYW 75 mph (120 kph) road speed governor and Q83 or RPW rear wheels. With S4A Goodyear tire, requires S3H highway traction tread)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tread, highway traction
- Wheelbase, 152" (386.1 cm) - with 84" (213.4 cm) CA and 146" (370.8 cm) CE. Includes a 6mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Frame, 8mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Fuel tank, single, 40-gallon (151L) fuel capacity - gas or diesel, located behind rear axle with fuel fill neck through frame rail and a black tethered fuel cap with gasoline engine and green un-tethered fuel cap with diesel engines. DRIVER SIDE FILL NECK ONLY. NO AUXILIARY PORTS. MINIMUM OVERHANG = 60" (5 FEET)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Fuel sender assembly. Robust fuel pump
- Tethered fuel cap
- Steering, power - ZF variable ratio power
- Brakes, front, power, 4-wheel disc, 4 channel ABS 4-piston - (See front axle options for more detail)
- Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See rear axle options for more detail)
- Parking brake, rear in-wheel park brake - hand lever operated

SAFETY

- 4-wheel disc, 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included.
- This vehicle does not include any air bags
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:10:42 PM

Page 11



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac Gmc ITEM NO(s). Spec # 3958-0116

MAKE OF TRUCK: Gmc MODEL: C4500 TC4C044 GVWR 17500 lbs.

PAYLOAD: 9146 # W.B. 152" C.A. 84" C.E. 146"

ENGINE: (GAS - DIESEL) Gas MAKE: Gm MODEL: LRW, P.1SAE H.P. 325

FUEL TANK(S) CAPACITY: 40 (GALS. TOTAL) TRANSMISSION: Allison 1000 MBV 6spid

SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 6750 lbs. AUX. N/A lbs.

AXLES: FRONT 8000 lbs. REAR 13500 lbs. REAR RATIO 5.13

ALTERNATOR: 150 amps. BATTERY 600 cca.

TIRE SIZE: FRONT 245/70R19.5G PR REAR 245/70R19.5G PR SINGLE DUAL ✓ M&S ✓

TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XTY/YTY

HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A

BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A

POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.

PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS
 (G.V.W.R. 15,000 LBS., min.) (4 x 4)

MODEL-2008 CURRENT NEW

	CHEV/ GMC <u>C4C044</u>	FORD <u>F-450</u>	DODGE <u>DM9L64</u>
G.V.W.R. (lbs.)	17,500	16,000	16,500
Wheelbase (inches)	152	164.8	168.5
C.A. (inches)	84	84	84
Engine: Diesel	6.6L	6.4L	6.7L
Type & No. of Cylinders	V-8	V-8 Turbo	L-6 Turbo
Net H.P.-S.A.E.	300	325	305

Transmission: Automatic:
 with maximum capacity transmission oil cooler with P.T.O. Provision. Factory installed.

Axle, Min. Cap.-lbs.			
Front	8,000	7,000	7,000
Rear	13,500	12,000	12,000
Springs, Min. Cap. at Ground			
Front-lbs. each	4,000	3,000	TBD
Rear-lbs. each	6,750	6,000	TBD

Tires, Truck, Tubeless, Radial, to meet G.V.W.R. Rear duals, mud and snow.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.

- ☑ Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- ☑ Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- ☑ Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- ☑ Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- ☑ Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- ☑ Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- ☑ Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- ☑ Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- ☑ Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- ☑ Pre-delivery inspection and servicing.
- ☑ Radio - AM/FM Manufacturers Standard, Factory Installed
- ☑ Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- ☑ Seats-Split Bench type, unless otherwise specified
- ☑ Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- ☑ Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- ☑ Speed Control, Factory Installed
- ☑ Steering-Power, Tilt Wheel
- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- Delete: On GM vehicles, OnStar and XM radio are deleted.

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- Air Conditioning-Factory Installed
- Alternator-80 amp., min.
- Battery-12 Volt, dual
- Brakes-Power.
- Fuel Capacity -largest available from mfg.
- Mirrors-Rear View, Inside. Outside R.H. and L.H., below eye level, extended reach, swing away type, 51 sq. in., minimum. Installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: Composite Mirror Heads
- Spare tire and wheel. GMC: Spare wheel only – No tire
- Steering-Power.
- Wrench-wheel. GMC – Wrench not available

ADDITIONAL MDOT OPTIONS: (Note: These options are not included in the MiDEAL price)

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this MDOT vehicle.

- Axle rear limited slip
- Hub autolocking on front GMC: Manual locking front hubs only
- Keys – (1) additional set (total of 3 sets) with code numbers; shall be with the vehicle at the time of delivery.
- Switches, upfitter for auxillary GMC: Panel only – Switches avail from body upfitter
- Throttle, Electronic, High Idle Engine RPM Control.
- Towing package: Heaviest duty available from manufacturer GMC- Standard
- Trailer brake controller, factory installed GMC- Not available

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS</u> (G.V.W.R. 15,000 LBS., min.) (4 x 4) Mich. Spec. #3958-0117	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: C4500 <i>F.O.B. - Dealership</i> Delivery Cost Per Mile \$1.50	\$36,475.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
Zip: 48185	
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
 Spec # 3958-0117

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC4C044	2008 GMC TC4500 Regular Cab 4WD	\$35,860.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C4C044	CUSTOM/BASE MODEL	\$0.00
DIESEL ENGINE		
LRX	DURAMAX DIESEL 6.6L, 300 HP (223 KW) @ 3000 RPM, 520 LB-FT (705 N-M) TORQUE @ 1600 RPM	\$9,259.00
GVWR		
GZX	17,500 LBS. (7938 KG) CAPACITY	INC
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
ROAD SPEED GOVERNOR		
KYW	75 MPH (120 KPH) SPEED GOVERNOR	INC
ALTERNATOR		
KG4	AD244, DELCO-REMY 150-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
ENGINE SHUTDOWN		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-DRIVER SIDE MOUNTED INSIDE FRAME RAIL,	INC
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$225.00
TRANSMISSION		
MBV	AUTOMATIC, ALLISON 1000 HS/RDS SERIES 6-SPEED	\$0.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
TRANSMISSION EQUIPMENT		
KNP	AUXILIARY TRANSMISSION OIL COOLER	\$95.00
TRANSFER CASE		
NP1	NEW VENTURE GEAR-MODEL NV273 TWO-SPEED	INC
FRONT AXLE		
G38	8000 LBS. (3629 KG) CAPACITY	\$0.00
FRONT SUSPENSION		
FSN	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	\$0.00
FRONT STABILIZER BAR		
F59	STABILIZER BAR	INC
FRONT WHEEL		
Q82	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$0.00
FRONT TIRE		
XTY	245/70R19.5G	\$0.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
FRONT TIRE TREAD		
R3H	HIGHWAY TRACTION	INC
SINGLE SPEED REAR AXLE		
HD2	SINGLE SPEED, DANA S110 13,500 LBS. (6123 KG) CAPACITY	INC
AXLE RATIO		
058	5.13:1	INC
TRACTION CONTROL		
G80	REAR LIMITED SLIP DIFFERENTIAL	INC
REAR SUSPENSION		
GR4	MULTI-LEAF, 13,500 LBS. (6123 KG) CAPACITY	INC
BOLTED OR RIVETED SUSPENSION		
EV8	REAR SUSPENSION BRACKETS ARE RIVETED TO FRAME IN LIEU OF BOLTS	\$0.00
REAR SHOCK ABSORBER		
SAN	REAR SHOCK ABSORBER NOT DESIRED	\$0.00
REAR WHEEL		
Q83	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	\$0.00
REAR TIRE		
YTY	245/70R19.5G	\$0.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3H	HIGHWAY TRACTION	INC
SPARE WHEEL		
SNF	FRONT	\$128.00
WHEELBASE		
EG9	152" (386.1 CM)	\$0.00
FUEL TANK		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
FUEL TANK		
NH4	SINGLE, 40-GALLON (151L) FUEL CAPACITY	INC
PARKING BRAKE		
J69	REAR IN-WHEEL PARK BRAKE	INC
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$155.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$852.00
INSIDE REARVIEW MIRRORS		
D36	INSIDE DAY/NIGHT REARVIEW MIRROR	\$19.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$180.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$150.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 4

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
ADDITIONAL OPTIONS		
VQ1	FLEET PROCESSING OPTION	\$0.00
OPTIONS TOTAL		\$11,063.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

EXTERIOR

- Paint scheme, solid, upper color, Summit White
- Paint scheme, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimized wall to wall turn diameter painted argent
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:34 PM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

INTERIOR

- Seat, driver, high-back bucket, fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter vinyl or 69C Very Dark Pewter cloth)
- Trim console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Stepwell storage areas at each door front and rear. Includes storage cover.
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 27, 2007 11:22:35 PM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:35 PM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

MECHANICAL

- GVWR, 17,500 lbs. (7938 kg) capacity - GVWR. Maximum GCWR 26,000 lb. Note: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET). A New Law (Highway Transportation Bill HR3) was passed on August 10, 2005 - Check with IRS for guidelines
- Engine, Vortec 8.1L MD gasoline V8, 325 hp (239 kw) @ 4000 rpm and 450 lb-ft torque (610 N-m) @ 2,800 rpm. - Maximum engine speed 5000 rpm. Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry type
- Cooling, anti-freeze protection temperature --40 degrees F (-40 degrees C)
- 75 mph (120 kph) speed governor - Required by the speed rating of the tires ordered
- Alternator, AD244 Delco-Remy 150-amp maximum (N/A with ANM Fire and Rescue or YF2 Ambulance Packages)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter, (Requires gasoline engine; N/A with ANQ Snow Plow Prep)
- Exhaust, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter, with diesel engines, stainless-steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Will delete transmission PTO gear.)
- Transmission, automatic, Allison 1000 HS/RDS Series 6-speed - With parking pawl and column shift, includes 4th Generation Electronic Controls and 0.61 overdrive. Torque Rating: 660 lb-ft (895 N-m) with shift energy management. Available with a Gross Vehicle Weight up to 19,500 lbs. (8845 kg) and a Gross Combination Weight Rating up to 26,000 lbs. (11,790 kg). To include PTO gear, please order with RPO PTO for Allison 1000 RDS Rugged Duty Series transmission. Includes transmission-oil cooler located inside radiator. With Option PTX the truck will be equipped with the Allison 1000 HS Highway Series transmission. (N/A with ANM Fire and Rescue or YF2 Ambulance Package)
- TranSynd synthetic automatic transmission fluid
- Transfer case, New Venture Gear - model NV273 two-speed, electrically actuated, IP mounted switch, includes shield
- Front axle, 8000 lbs. (3629 kg) capacity - Solid drive axle. Up to 45 degree turn angle, includes 4 piston brake apply calipers and manual locking hubs
- Front suspension, tapered leaf, 8000 lbs. (3629 kg) capacity

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:35 PM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, Solid bar style, 1.5" (38mm)
- Front wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 10,000 lbs. (4536 kg) capacity, (Requires Q83 steel rear wheel and XTY or XNC front tires)
- Front tire size, 245/70R19.5G - 9090 lbs. (4123 kg) capacity (Requires KYR 65 mph or KYW 75 mph (120 kph) road speed governor, Q82 or RPM front wheels. With R4A Goodyear tire, requires R3H highway traction tread)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tread, highway traction
- Rear axle, single speed, Dana S110 13,500 lbs. (6123 kg) capacity - full floating, includes 2-piston brake applied calipers
- Four-wheel drive
- Rear axle ratio, 5.13:1 (Requires HD2 single speed rear axle)
- Rear limited slip differential
- Rear suspension, multi-leaf, 13,500 lbs. (6123 kg) capacity
- Rear suspension brackets are riveted to frame in lieu of bolts
- Rear shock absorber not desired (N/A with tapered leaf springs)
- Rear wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 20,000 lbs. (9072 kg) capacity (Requires Q82 front wheels and YTY or YNC rear tires)
- Rear tire size, 245/70R19.5G - 17,500 lbs. (7938 kg) capacity (Requires KYR 65 mph or KYW 75 mph (120 kph) road speed governor and Q83 or RPW rear wheels. With S4A Goodyear tire, requires S3H highway traction tread)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tread, highway traction
- Wheelbase, 152" (386.1 cm) - with 84" (213.4 cm) CA and 146" (370.8 cm) CE. Includes a 6mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Frame, 8mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
- Fuel tank, single, 40-gallon (151L) fuel capacity - gas or diesel, located behind rear axle with fuel fill neck through frame rail and a black tethered fuel cap with gasoline engine and green un-tethered fuel cap with diesel engines. DRIVER SIDE FILL NECK ONLY. NO AUXILIARY PORTS. MINIMUM OVERHANG = 60" (5 FEET)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 27, 2007 11:22:35 PM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC4500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC4C044 Regular Cab 4WD

- Fuel sender assembly. Robust fuel pump
- Tethered fuel cap
- Steering, power - ZF variable ratio power
- Brakes, front, power, 4-wheel disc, 4 channel ABS 4-piston - (See front axle options for more detail)
- Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See rear axle options for more detail)
- Parking brake, rear in-wheel park brake - hand lever operated

SAFETY

- 4-wheel disc, 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included.
- This vehicle does not include any air bags
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:22:35 PM

Page 11



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac GMC ITEM NO(s). Spec# 3958-0117
 MAKE OF TRUCK: GMC MODEL: C4500 TC4044 GVWR 17500 lbs.
 PAYLOAD: 8860 # W.B. 152" C.A. 84" C.F. 146"
 ENGINE: (GAS - DIESEL) Diesel MAKE: Gm Duramax MODEL: LRX, 6.6 SAE H.P. 300
 FUEL TANK(S) CAPACITY: 40 (GALS. TOTAL) TRANSMISSION: Allison 1000 max 6-spd
 SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 6750 lbs. AUX. N/A lbs.
 AXLES: FRONT 8000 lbs. REAR 13500 lbs. REAR RATIO 5.13
 ALTERNATOR: 150 amps. BATTERY Dual 750 cca.
 TIRE SIZE: FRONT 245/70R19.5G PR REAR 245/70R19.5G PR SINGLE _____ DUAL M&S
 TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XTY/YTY
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS (G.V.W.R. 21,000 lbs., min.)*
LOW PROFILE

MODEL-2008 CURRENT NEW

	<u>FORD</u> <u>F650</u>	<u>INT'L</u> <u>4300M7</u>	<u>CHEV./GMC</u> <u>C5C042</u>
Wheelbase (inches)	158	152	152
C.A. (inches)	84	85	84
Engine: Diesel	Cummins ISB Maxx Force M7 Duramax		
Type & No. of Cylinders	I-6	V-8	V-8
Net H.P.-S.A.E.	200	200 Gross	300
Transmission: 5-speed w/ PTO Allison Auto. 2000/2400 Series			
Axle, Min. Cap-lbs.			
Front, 7,000 minimum	8,500	8,000	8,000
Rear, 17,500 minimum	17,500	17,500	19,000
Ratio for minimum loaded road speed of approx. 68 mph			
Springs, Min. Cap. at Ground			
Front- lbs. each	4,250**	4,000**	4,000**
Rear- lbs. each	8,750**	9,250**	9,500**
**includes shock absorbers			

*SEE Mich. 3958-0137 or 3958-0141 for body.

Tires, Truck, Tubeless, Radial, 245/70R19.5 (16PR) Minimum. Front to be Highway Tread, Rear duals-Traction Drive Tread, Goodyear Unisteel G-164 RTD or approved equal. Same Mfg. Front and Rear.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.

- ☑ Color-Manufacturers Standard to be selected.
- ☑ Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- ☑ Dome Light.
- ☑ Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.
- ☑ Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- ☑ Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- ☑ Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- ☑ Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- ☑ Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- ☑ Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- ☑ Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- ☑ Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- ☑ Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- ☑ Pre-delivery inspection and servicing.
- ☑ Radio - AM/FM Manufacturers Standard, Factory Installed
- ☑ Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- ☑ Seats-Split Bench type, unless otherwise specified
- ☑ Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- ☑ Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- ☑ Speed Control, Factory Installed
- ☑ Steering-Power, Tilt Wheel
- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL

VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- Air Conditioning-Factory Installed
- Alternator-100 amp. min., Reference 22SI or approved equal
- Battery(s)-12 Volt, 1,100 CCA minimum.
- Brakes-Power. Current FMVSS.
- Cab assist handles-right and left.
- Fuel Tank-50 gallon each, minimum, L.H. and R.H. Step Tanks. GMC: Single In-rail Fuel Tank. 40 Gal.
- Hood, Tilt.
- Mirrors-Rear View, Outside. L.H. and R.H. West Coast type, 6" x 16", installed, with stainless steel or powder coated steel or composite heads, brackets, and hardware.
- Shock Absorbers, Front and Rear
- Steering-Power.
- Switches (6), outfitter, with remote power module (MDOT) GMC: Switch panel only, unless supplied by upfitter
- Tachometer.
- Throttle, Electronic, High Idle Engine RPM Control.
- Wheels, Hub Pilot Disc Type

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS (G.V.W.R. 21,000 lbs., min.)*</u>	
<u>LOW PROFILE</u>	
Mich. Spec. #3958-0134	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: Topkick C5500 F.O.B. - Dealership Delivery Cost Per Mile \$1.50	\$40,746.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
	Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC5C042	2008 GMC TC5500 Regular Cab 2WD	\$37,740.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C5C042	CUSTOM/BASE MODEL	\$0.00
DIESEL ENGINE		
LRX	DURAMAX DIESEL 6.6L, 300 HP (223 KW) @ 3000 RPM, 520 LB-FT (705 N-M) TORQUE @ 1600 RPM	\$10,219.00
GVWR		
GW4	26,000 LBS. (11,794 KG) GVWR SALES PACKAGE,	\$5,457.00
C6V	26,000 LBS. (11,794 KG) CAPACITY	INC
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
ROAD SPEED GOVERNOR		
KYW	75 MPH (120 KPH) SPEED GOVERNOR	\$0.00
ALTERNATOR		
KG4	AD244, DELCO-REMY 150-AMP MAXIMUM	INC
BATTERY		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
 Customer File:

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	INC
ENGINE SHUTDOWN		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-PASSENGER SIDE MOUNTED INSIDE FRAME RAIL	INC
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$250.00
TRANSMISSION		
MBZ	AUTOMATIC, ALLISON 2200 HS/RDS SERIES 6-SPEED	\$985.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
FRONT AXLE		
FM8	8000 LBS. (3629 KG) CAPACITY	INC
FRONT SUSPENSION		
FNS	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	\$82.00
FRONT WHEEL		
Q82	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	INC
FRONT TIRE		
XNC	245/70R19.5H	\$118.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		
R3C	PREMIUM HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		
HPK	DANA 19060S, 19,000 LBS. (8618 KG) CAPACITY	INC
AXLE RATIO		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
AXLE RATIO		
006	4.63:1	\$0.00
REAR SUSPENSION		
GN0	MULTI-LEAF, 19,000 LBS. (8618 KG) CAPACITY	\$66.00
BOLTED OR RIVETED SUSPENSION		
EV8	REAR SUSPENSION BRACKETS ARE RIVETED TO FRAME IN LIEU OF BOLTS	\$0.00
REAR SHOCK ABSORBER		
G68	REAR SHOCK ABSORBER	\$58.00
REAR WHEEL		
Q83	19.5" X 6.75" (49.5 CM X 17.1 CM), STEEL DISC	INC
REAR TIRE		
YNC	245/70R19.5H	\$386.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3H	HIGHWAY TRACTION	\$0.00
WHEELBASE		
EG9	152" (386.1 CM)	\$184.00
REINFORCEMENT		
F08	"L" CHANNEL	INC
FUEL TANK		
NG6	DUAL, TOTAL FUEL CAPACITY OF 40-GALLONS (151L)	\$136.00
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$173.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
AIR CONDITIONING		
C60	AIR CONDITIONING	\$939.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$200.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$165.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
OPTIONS TOTAL		\$19,418.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

EXTERIOR

- Paint scheme, solid, upper color, Summit White
- Paint scheme, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumper, front, steel, 96" (243.8 cm) wide - styled to minimized wall to wall turn diameter painted argent
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps.
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5 cm x 17.8 cm) with 6" x 7" (15.2 cm x 17.8 cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: acli@hotmai.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

INTERIOR

- Seat, driver, high-back bucket, fixed height, manual adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat, passenger, high-back bucket, fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter vinyl or 69C Very Dark Pewter cloth)
- Trim console - located next to driver's seat, and two cupholder
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer with automatic and manual transmissions
- Electronic engine hour meter
- Engine "Check Gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pocket on front doors, beverage holders, and reflector on all doors
- Stepwell storage areas at each door front and rear. Includes storage cover.
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module, (N/A with ZQ2 driver convenience package)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 27, 2007 11:51:14 PM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

MECHANICAL

- GVWR, 19,500 lbs. (8845 kg) capacity - GCWR limited to 26,000 lb. (11,794 kg) or 30,000 lb. with optional Allison 2350 Series transmissions (MHE/MHD). NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET). A New Law (Highway Transportation Bill HR3) was passed on August 10, 2005 - Check with IRS for guidelines
- Engine, Vortec 8.1L MD gasoline V8, 325 hp (239 kw) @ 4000 rpm and 450 lb-ft torque (610 N-m) @ 2,800 rpm. - Maximum engine speed 5000 rpm. Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry type
- Cooling, anti-freeze protection temperature - -40 degrees F (-40 degrees C)
- Road Speed Governor, controlled by the speed rating of the tires ordered. - which will be less than or equal to 85 mph (137 kph); 80 mph (129 kph) with EC9 128" wheelbase/60" CA, ML6 manual transmission and 008 4.88 rear axle ratio; 75 mph (120 kph) with EC9 128" wheelbase/60" CA, M74 automatic transmission and HD2 rear axle
- Alternator, AD244 Delco-Remy 150-amp maximum (N/A with YW2 Wrecker package, ANM Fire and Rescue package or YF2 Ambulance package)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C grounded directly to starter. (Requires gasoline engine) (N/A with ANQ Snow Plow Prep package or YW2 Wrecker package)
- Exhaust, single horizontal - passenger side mounted inside frame rail. With gasoline engines, stainless-steel exhaust with catalytic converter. With diesel engines, stainless-steel exhaust, oxidation catalyst, diesel particulate filter and exhaust gas cooler.
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. (Note: Will delete transmission PTO gear.)
- Transmission, automatic, Allison 1000 HS/RDS Series 6-speed - With parking pawl and column shift, includes 4th Generation Electronic Controls and 0.61 overdrive. Torque Rating: 660 lb-ft (895 N-m) with shift energy management. Available with a Gross Vehicle Weight up to 19,500 lbs. (8845 kg) and a Gross Combination Weight Rating up to 26,000 lbs. (11,790 kg). To include PTO gear, please order with RPO PTO for Allison 1000 RDS Rugged Duty Series transmission. Includes transmission-oil cooler located inside radiator. With Option PTX the truck will be equipped with the Allison 1000 HS Highway Series transmission. (N/A with ANM Fire and Rescue or YF2 Ambulance Package; N/A with GW2 or GW4 Sales Packages)
- TranSynd synthetic automatic transmission fluid

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 27, 2007 11:51:14 PM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

- Front axle, 7000 lbs. (3175 kg) capacity - I-beam Wide-trac. Up to 53 degree turn angle, includes 4-piston brake apply calipers. Steering Gear Series: ZF8014, (Requires GZG or GZJ GVWRs)
- Front suspension, tapered leaf, 7000 lbs. (3175 kg) capacity (includes stabilizer) (Requires GZG or GZJ GVWRs)
- Front shock absorber, diameter 1.375" (35mm)
- Front stabilizer bar, 2" x 2" square tube (5 cm x 5 cm)
- Front wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole. 10,000 lbs. (4536 kg) capacity, (Requires Q83 steel rear wheel)
- Front tire size, 225/70R19.5F - 7280 lbs. (3302 kg) capacity, (With R4A Goodyear or R4L Michelin, requires R3C front premium highway tread)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tread, premium, highway (Requires R4A Goodyear or R4L Michelin)
- Rear axle, single speed, Dana S110 13,500 lbs. (6123 kg) capacity - full floating, Includes 2-piston brake applied calipers. (Requires GZG or GZJ GVWR)
- Rear wheel drive
- Rear axle ratio, 5.13:1 (Requires gasoline engine and HD2 or HD1 single speed rear axles)
- Rear suspension, multi-leaf, 15,000 lbs. (6804 kg) capacity (Requires GZG or GZJ GVW and HD2 single speed rear axle)
- Rear suspension brackets are riveted to frame in lieu of bolts
- Rear shock absorber not desired (N/A with tapered leaf springs)
- Rear wheels, 19.5" x 6.75" (49.5 cm x 17.1 cm), steel disc - 8-hole, 20,000 lbs. (9072 kg) capacity, (Requires Q82 steel front wheel)
- Rear tire size, 225/70R19.5F - 13,660 lbs. (6196 kg) capacity, (With S4A Goodyear, requires S3C rear premium highway tread or S3H rear traction tread; with S4L Michelin, requires S3C rear premium highway tread or S3J rear highway traction tread)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tread, premium, highway (Requires S4A Goodyear or S4L Michelin)
- Wheelbase, 128" (325.1 cm) - with 60" (152.4 cm) CA and 100" (254 cm) CE. Includes a 6mm 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63 (Requires KYW 75 mph (120 kph) road speed governor with and HD2 13,500 lbs. (6123 kg) capacity rear axle)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC5500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC5C042 Regular Cab 2WD

- Frame, 6mm - 80,000 psi (551,600 kPa) yield strength, steel frame, RBM: 610,400 Section Modulus 7.63
 - Fuel tank, single, 25-gallon (95L) fuel capacity - gas or diesel located midship between the frame rails, with fuel fill neck through the frame rail (this option uses the mid-frame tank included in the NG6 dual tank option) Tethered fuel cap is black with gasoline engines, and green un-tethered fuel cap with diesel engines. (Required in YW2 Wrecker Package) (Standard on 60" (152.4 cm) CA), (Optional on all other CA's) MINIMUM OVERHANG = 36" (3 FEET)
 - Fuel sender assembly. Robust fuel pump
 - Tethered fuel cap
 - Steering, power - ZF variable ratio power
 - Brakes, front, power, 4-wheel disc, 4 channel ABS 4-piston - (See Front Axle options more details)
 - Brakes, rear, power, 4-wheel disc, 4 channel ABS 2-piston - (See Rear Axle options for more detail)
 - Parking brake, hand lever operated transmission mounted drum brake
- SAFETY*
- 4-wheel disc, 4-channel ABS
 - Air bags, Supplemental Inflatable Restraints not included. This vehicle does not include any air bags
 - Seat belt warning indicator
 - Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 27, 2007 11:51:14 PM

Page 10

APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac GMC ITEM NO(s): Spec # 3958-0134
 MAKE OF TRUCK: GMC MODEL: ^{Topkick} C5500 TC5042 GVWR 26000 lbs.
 PAYLOAD: 17,751 # W.B. 152" ✓ C.A. 84" ✓ C.E. 146" ✓
 ENGINE: (GAS - DIESEL) Diesel MAKE: GM Duramax MODEL: LRX, 6.6 SAE H.P. 300 ✓
 FUEL TANK(S) CAPACITY: 40 (GALS. TOTAL) TRANSMISSION: Allison 2200 6-spd
 SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 9500 lbs. AUX. N/A lbs.
 AXLES: FRONT 8000 lbs. REAR 19000 lbs. REAR RATIO 4.63
 ALTERNATOR: 150 ✓ amps. BATTERY Dual 750 1,500 cca. per remark
 TIRE SIZE: FRONT 245/70R19.5 HPR REAR 245/70R19.5 HPR SINGLE _____ DUAL ✓ M&S Rear
 TIRE: MAKE Good year STYLE NO. TBD MFG. CODE XNC/YNC
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS (G.V.W.R. 21,000 lbs., min.)*

MODEL-2008 CURRENT NEW

	FORD F650	INT'L 4300 M7	CHEV./GMC C6C042
Wheelbase (inches)	158	152	152
C.A. (inches)	84	85	84
Engine: Diesel	Cummins ISB MaxxForce M7		Duramax
Type & No. of Cylinders	I-6	V-8	I-6
Net H.P.-S.A.E.	200	200 Gross	215
Transmission: 5-speed w/ PTO			Allison 2200RDS 6 spd w/park pawl
Allison Auto. 2000 Series			
Axle, Min. Cap-lbs.			
Front, 7,000 minimum	8,500	8,000	8,000
Rear, 17,500 minimum	17,500	17,500	19,000
Ratio for minimum loaded road speed of approx. 68 mph			
Springs, Min. Cap. at Ground			
Front- lbs. each	4,250**	4,000**	4,000**
Rear- lbs. each	8,750**	9,250**	9,500**
**includes shock absorbers			

*SEE Mich. 3958-0137 or 3958-0141 for body.

Tires, Truck, Tubeless, Radial, 9R22.5F (12PR) Minimum. Front to be Highway Tread, Rear duals-Traction Drive Tread, Goodyear Unisteel G-164 RTD or approved equal. Same Mfg. Front and Rear.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.
- Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- Pre-delivery inspection and servicing.
- Radio - AM/FM Manufacturers Standard, Factory Installed
- Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- Seats-Split Bench type, unless otherwise specified
- Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- Speed Control, Factory Installed
- Steering-Power, Tilt Wheel

- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- ☑ Air Conditioning-Factory Installed
- ☑ Alternator-100 amp. min., Reference 22SI or approved equal
- ☑ Battery(s)-12 Volt, 1,100 CCA minimum.
- ☑ Brakes-Power. Current FMVSS.
- ☑ Cab assist handles-right and left.
- ☑ Fuel Tank-45 gallon each, minimum, L.H. and R.H. Step Tanks.
- ☑ Hood, Tilt.
- ☑ Mirrors-Rear View, Outside. L.H. and R.H. West Coast type, 6" x 16", installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: Composite Heads
- ☑ Shock Absorbers, Front and Rear
- ☑ Steering-Power.
- ☑ Switches (6), outfitter, with remote power module (MDOT) GMC: Panel only, unless supplied by upfitter
- ☑ Tachometer.
- ☑ Throttle, Electronic, High Idle Engine RPM Control.
- ☑ Wheels, Hub Pilot Disc Type

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS (G.V.W.R. 21,000 lbs., min.)*</u>	
Mich. Spec. #3958-0135	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: Topkick C6500 F.O.B. - Dealership Delivery Cost Per Mile \$1.50	\$46,108.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
	Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
Spec # 3958-0135

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC6C042 Regular Cab

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC6C042	2008 GMC TC6500 Regular Cab	\$45,200.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C6C042	CUSTOM/BASE MODEL	\$0.00
VEHICLE APPLICATION		
RQ2	TRUCK APPLICATION	INC
GVWR		
GZI	RATES GVWR AT 25,950 LBS. (11,736 KG) CAPACITY,	\$0.00
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
DIESEL ENGINE		
LYA	ISUZU DIESEL 6H 7.8L I6, 215 HP (160 KW) @ 2200 RPM AND 560 LB-FT TORQUE (759 N-M) @ 1450 RPM	\$16,466.00
AIR CLEANER		
KNB	DRY-TYPE STANDARD FILTER ELEMENT	\$0.00
FUEL/WATER SEPARATOR		
NWB	RACOR FRAME-MOUNTED SPIN-ON TYPE	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
ALTERNATOR		
K60	22SI, DELCO 100-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	\$0.00
ALARM		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-DRIVER SIDE MOUNTED INSIDE FRAME RAIL	\$0.00
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$250.00
AUTOMATIC TRANSMISSION		
MBZ	ALLISON 2200 HS/RDS SERIES 6-SPEED	\$555.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
FRONT AXLE		
FM8	8000 LBS. (3629 KG) CAPACITY	INC
FRONT SUSPENSION		
FSN	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	\$0.00
FRONT WHEEL		
QH3	22.5" X 7.5" (58.9 CM X 19 CM), STEEL DISC	INC
FRONT TIRE		
XWJ	10R22.5F-10,300 LBS. (4672 KG) CAPACITY	\$120.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		
R3C	PREMIUM, HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
SINGLE SPEED REAR AXLE		
HPK	DANA 19060S, 19,000 LBS. (8618 KG) CAPACITY	\$203.00
AXLE RATIO		
017	6.50:1	INC
REAR SUSPENSION		
GN0	MULTI-LEAF, 19,000 LBS. (8618 KG) CAPACITY	\$41.00
REAR SHOCK ABSORBER		
G68	REAR SHOCK ABSORBER	\$58.00
REAR WHEEL		
QH4	22.5" X 7.5" (58.9 CM X 19 CM), STEEL DISC	INC
REAR TIRE		
YWJ	10R22.5F-19,500 LBS. (8845 KG) CAPACITY	\$320.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3H	HIGHWAY TRACTION	\$0.00
WHEELBASE		
EG9	152" (386.1 CM)	\$0.00
FRAME RAIL		
FD5	RAIL, PAINTED SEMI-GLOSS BLACK 8MM-80,000 PSI (551,600 KPA) YIELD STRENGTH,	\$155.00
FUEL TANK		
NNQ	DUAL, 100-GALLON (380L) TOTAL FUEL CAPACITY,	\$370.00
BRAKE SYSTEM		
JE3	HYDRAULIC, SPLIT BRAKE SYSTEM	INC
AIR COMPRESSOR		
KK3	HALDEX 292 WATER-COOLED 12.9 CFM	INC
DRIVER CONVENIENCE PACKAGES		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclibx@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$172.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$939.00
INSIDE REARVIEW MIRRORS		
D36	INSIDE DAY/NIGHT REARVIEW MIRROR	\$21.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$200.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$165.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
__V	VINYL SEAT TRIM	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC6C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
	OPTIONS TOTAL	\$20,035.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

EXTERIOR

- Paint, solid, upper color, Summit White
- Paint, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumpers, front steel, painted argent - Bumper thickness 3.9 mm
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops
- Horn, single electric mounted inside engine compartment

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

INTERIOR

- Seat, driver, High-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out
- Seat, passenger, High-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Center console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors
- Stepwell storage areas at each door. Includes storage cover
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 driver convenience package)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 28, 2007 12:15:14 AM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

MECHANICAL

- Truck application NOTE: Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm and 440 lb-ft (594 N-m) torque @ 3,200 rpm - Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry-type standard filter element (Requires gasoline engine)
- Underhood air cleaner restriction gauge
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire companies specifications for details.
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single AC Delco, 600 CCA, 12V. - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Requires gasoline engine)
- Exhaust system, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic convertor, with diesel engines 409 stainless-steel exhaust system, integrated oxidation catalyst on Isuzu engine, Diesel Particulate Filter (DPF) and exhaust gas cooler (N/A with FQT wheelbase with Isuzu diesel engines and not available with EG9 wheelbase with Caterpillar engine)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. NOTE: Deletes transmission PTO gear with Allison MTX/MBZ 2200HS, MTY 2300HS, MHE 2350HS, MPS 2500HS, and MPQ 2550HS Series transmissions.
- Transmission, automatic, Allison 2300 HS/RDS Series (Close Ratio) 5-speed - No parking pawl. Includes 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), Available with a Gross Vehicle Weight up to 33,000 lbs. (15,000 kg) and a Gross Combined Weight up to 33,000 lbs. (15,000 kg). When "PTX" is selected, it does not include power take-off gear in the Allison 2300 HS Highway Series transmission. To include PTO gear please order with RPO "PTO" for Allison 2300 RDS Rugged Duty Series transmission. Includes transmission oil cooler in radiator, increased cooling and column shift. (Requires gasoline engine, HD1 or HPK single speed rear axles)
- TranSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Front axle, 8000 lbs. (3629 kg) capacity - Up to 53 degree turn angle. Steering Gear Series: ZF8014
- Front suspension, tapered leaf, 8000 lbs. (3629 kg) capacity (Requires FM8 front axle)

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbxx@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

- Front shock absorber, diameter 1.375" (35mm)
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheels)
- Front tire size, 245/75R22.5G - 9350 lbs. (4241 kg) capacity, (With R4A Goodyear requires R3C front premium tread; N/A with Michelin)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire tread, premium highway
- Rear axle, single-speed, Dana S130-S, 15,000 lbs. (6804 kg) capacity - 40,000 lbs. (18,144 kg) GCWR
- Rear wheel drive
- Rear axle ratio, 6.50:1 (Requires HD1 or HPK single speed rear axle)
- Rear suspension, multi-leaf, 15,000 lbs. (6804 kg) capacity (Requires HD1 single speed rear axle)
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK or HD1 single speed rear axle or HPM two-speed rear axle and 22.5" tires)
- Rear tire size, 245/75R22.5G - 17,640 lbs. (8001 kg) capacity (With S4A Goodyear requires S3C rear premium tread or S3H rear highway traction tread; N/A with Michelin)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire tread, premium highway
- Wheelbase, 128" (325.1 cm) - with 60" (152.4 cm) CA and 135.3" (343.7 cm) CE. Includes a 6 mm 50,000 psi (344,750 kPa) yield strength, steel frame, RBM: 479,000 Section Modulus 9.58 cu. in. (N/A with diesel engine)
- Frame, painted semi-gloss black 6mm rail - 50,000 psi (344,750 kPa) yield strength, steel frame, SAE J1392-050XLK steel, dimensions 9 1/2" x 3" x 1/4" section modulus 9.58 cu. in., RBM 479,000
- Fuel tank, single, 50-gallon (189.2L) fuel capacity - driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines (Requires QH4, RPR or RNN 22.5" wheels; N/A with GPG Lo-Pro option)
- Steering, power - ZF variable ratio power

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 28, 2007 12:15:14 AM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC6500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC6C042 Regular Cab

- Brake system, hydraulic, split - with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391 mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (64 mm) diameter pistons with 8,000 lb. (3629 kg) front axle, (70 mm) diameter pistons with 10,000 lb. (4536 kg) front axle
- Parking brake, hand lever operated transmission mounted drum brake

SAFETY

- Brake system, hydraulic, split - with 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 12:15:14 AM

Page 11



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac Gmc ITEM NO(s): Spec # 3958-0135

MAKE OF TRUCK: Gmc MODEL: Topkick C6500TC66042GVWR 25950 lbs.

PAYLOAD: 16,893 W.B. 152" C.A. 84" C.E. 135.30"

ENGINE: (GAS - DIESEL) Diesel MAKE: Gm/Isuzu/Duramax MODEL: L7A, 7.8 SAE H.P. 215

FUEL TANK(S) CAPACITY: 100 (GALS. TOTAL) TRANSMISSION: Allison 2200 6-spd

SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 9500 lbs. AUX. N/A lbs.

AXLES: FRONT 8000 lbs. REAR 19000 lbs. REAR RATIO 6.50

ALTERNATOR: 100 amps. BATTERY Dual 750 1,500 cca. Permanone

TIRE SIZE: FRONT 10R22.5 F PR REAR 10R22.5 F PR SINGLE _____ DUAL M&S Rear

TIRE: MAKE Goodyear STYLE NO. 73D MFG. CODE XWJ/YWJ

HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A

BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A

POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.

PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS (G.V.W.R. 23,500 lbs., min.)*

MODEL-2008 CURRENT NEW

	<u>FORD</u> <u>F650</u>	<u>INTL</u> <u>4300 M7</u>	<u>CHEVY/GMC</u> <u>C7C042</u>
Wheelbase (inches)	158	152	152
C.A. (inches)	84	85	84
Engine: Diesel, Type	Cummins ISB	MaxxForce 7	Duramax
Size	6.7L	6.0L	7.8L
No. of Cylinders	I-6	V-8	6
Gross H.P., 170 min.	200	200	215
Torque	520	520	560
Transmission: 5-speed			Allison 2200RDS 6 spd w/park pawl
Allison w/ PTO Auto. 2000/2400			
Axle, Min. Cap.-lbs.			
Front, 7,000 minimum	8,500	8,000	8,000
Rear, 17,500 minimum	17,500	17,500	19,000
Ratio for minimum loaded road speed of approx. 68 mph.			
Springs, Min. Cap. at Ground			
Front-lbs. each	4,250**	4,000**	4,000**
Rear-lbs. each	8,750**	9,250**	9,500**
Aux.-lbs. each	2,250	2,250	no rating
**includes shock absorbers			

*SEE Mich. 3958-0137 or 3958-0141 for body.

Tires, Truck, Tubeless, Radial, 9R22.5F (12PR) Minimum. Front to be Highway Tread, Rear duals-Traction Drive Tread, Goodyear Unisteel G-164 RTD or approved equal. Same Mfg. - Front and Rear.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.
- Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- Pre-delivery inspection and servicing.
- Radio - AM/FM Manufacturers Standard, Factory Installed
- Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- Seats-Split Bench type, unless otherwise specified
- Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- Speed Control, Factory Installed
- Steering-Power, Tilt Wheel

- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- ☑ Alternator-100 amp. min., Reference 22SI or approved equal
- ☑ Battery(s)-12 Volt; 1,100 CCA minimum.
- ☑ Brakes-Full air. Current FMVSS. Dust plates. Air dryer with spin on filter, Automatic Drain Valves. Automatic slack adjusters.
- ☑ Cab assist handles-right and left.
- ☑ Fuel/Water Separator with Heater.
- ☑ Fuel Tanks-45 gallon each L.H. and R.H. Step tanks.
- ☑ Heater-engine block, 110/120 VAC
- ☑ Hood, Tilt.
- ☑ Mirrors, Rear View-Outside. L.H. & R.H. West Coast Type. 6" x 16", installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: Composite Mirror Heads
- ☑ Shock absorbers-Front and Rear, double acting, telescopic.
- ☑ Starting Aid-Cold weather, ether type or glow plug. GMC: Intake heater
- ☑ Steering-Power.
- ☑ Switches (6), outfitter, with remote power module (MDOT) GMC: Panel only, switches not available unless supplied by upfitter
- ☑ Tachometer.
- ☑ Throttle, Electronic, High Idle Engine RPM Control.
- ☑ Wheels-Hub Piloted disc.

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS (G.V.W.R. 23,500 lbs., min.)*</u>	
Mich. Spec. #3958-0136	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: Topkick C7500 F.O.B. - Dealership Delivery Cost Per Mile \$1.80	\$47,194.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
	Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
 Spec # 3958-0136

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC7C042	2008 GMC TC7500 Regular Cab	\$45,975.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C7C042	CUSTOM/BASE MODEL	\$0.00
VEHICLE APPLICATION		
RQ2	TRUCK APPLICATION	INC
GVWR		
	NO 25,950# GVWR RATING DESIRED	\$0.00
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
DIESEL ENGINE		
LYA	ISUZU DIESEL 6H 7.8L I6, 215 HP (160 KW) @ 2200 RPM AND 560 LB-FT TORQUE (759 N-M) @ 1450 RPM	\$16,466.00
AIR CLEANER		
KNB	DRY-TYPE STANDARD FILTER ELEMENT	\$0.00
FUEL/WATER SEPARATOR		
NWB	RACOR FRAME-MOUNTED SPIN-ON TYPE	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
ENGINE BLOCK HEATER		
KB3	1250-WATT, 110V	\$50.00
ALTERNATOR		
K60	22SI, DELCO 100-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	\$0.00
ALARM		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-DRIVER SIDE MOUNTED INSIDE FRAME RAIL	\$0.00
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$250.00
AUTOMATIC TRANSMISSION		
MBZ	ALLISON 2200 HS/RDS SERIES 6-SPEED	\$555.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
FRONT AXLE		
FM8	8000 LBS. (3629 KG) CAPACITY	-\$459.00
FRONT SUSPENSION		
FSN	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	-\$51.00
FRONT WHEEL		
QH3	22.5" X 7.5" (58.9 CM X 19 CM), STEEL DISC	\$0.00
FRONT TIRE		
XUE	9R22.5F-9080 LBS. (4118 KG) CAPACITY	\$69.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY		MSRP
<u>Code</u>	<u>Description</u>	
FRONT TIRE TREAD		
R3C	PREMIUM, HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		
HPK	DANA 19060S, 19,000 LBS. (8618 KG) CAPACITY	INC
AXLE RATIO		
022	7.17:1	INC
REAR SUSPENSION		
GN0	MULTI-LEAF, 19,000 LBS. (8618 KG) CAPACITY	\$0.00
REAR SHOCK ABSORBER		
G68	REAR SHOCK ABSORBERS	\$58.00
REAR WHEEL		
QH4	22.5" X 7.5" (58.9 CM X 19 CM), STEEL DISC	\$0.00
REAR TIRE		
YUE	9R22.5F-17,200 LBS. (7802 KG) CAPACITY	\$160.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3H	HIGHWAY TRACTION	\$0.00
WHEELBASE		
EG9	152" (386.1 CM)	\$0.00
FRAME RAIL		
FD0	PAINTED SEMI-GLOSS BLACK 6MM RAIL-50,000 PSI (344,750 KPA) YIELD STRENGTH,	INC
FUEL TANK		
NNQ	DUAL, 100-GALLON (380L) TOTAL FUEL CAPACITY,	\$370.00
BRAKE SYSTEM		
JE4	AIR, ABS-4-CHANNEL BENDIX BRAKE SYSTEM 'S' CAM TYPE MERITOR,	\$1,778.00
BRAKE EQUIPMENT		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
BRAKE EQUIPMENT		
JRF	REAR DUST SHIELDS	\$0.00
AIR COMPRESSOR		
KK3	HALDEX 292 WATER-COOLED 12.9 CFM	INC
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$172.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$939.00
INSIDE REARVIEW MIRRORS		
D36	INSIDE DAY/NIGHT REARVIEW MIRROR	\$21.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$200.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$165.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
OPTIONS TOTAL		\$20,743.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

EXTERIOR

- Paint, solid, upper color, Summit White
- Paint, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumpers, front steel, painted argent - Bumper thickness 3.9 mm
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops
- Horn, single electric mounted inside engine compartment

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

INTERIOR

- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out.
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Center console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors
- Stepwell storage areas at each door. Includes storage cover
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 28, 2007 11:58:28 AM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

MECHANICAL

- Truck application NOTE: Federal Excise Tax (FET) of 12% must be paid on the final selling price for trucks with GVWR's of 33,001 lbs. and above. Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines. PLEASE NOTE: The 12% FET tax is NOT included in AutoBook Pricing.
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm, 440 lb-ft (594 N-m) torque @ 3,200 rpm. - Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry-type standard filter element (Requires gasoline engine)
- Underhood air cleaner restriction gauge
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" and 24.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire company specifications for details.
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Requires gasoline engine)
- Exhaust system, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter. With diesel engines 409 stainless-steel exhaust system, integrated oxidation catalyst on Isuzu diesel, Diesel Particulate Filter (DPF) and exhaust gas cooler. (N/A with FQT wheelbase with Isuzu diesel engines and not available with EG9 wheelbase with Caterpillar engine)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. NOTE: Deletes transmission PTO gear with Allison MTX/MBZ 2200HS, MTY 2300HS, MHE 2350HS, MPS 2500HS, and MPQ 2550HS Series transmissions.
- Transmission, automatic, Allison 2300 HS/RDS (Close Ratio) 5-speed - No parking pawl. Includes 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), Available with a Gross Vehicle Weight up to 33,000 lbs. (15,000 kg) and a Gross Combined Weight up to 33,000 lbs. (15,000 kg). When "PTX" is selected, it does not include power take-off gear in the Allison 2300 HS Highway Series transmission. To include PTO gear please order with RPO "PTO" for Allison 2300 RDS Rugged Duty Series transmission. Includes transmission oil cooler in radiator, increased cooling and column shift. (Requires gasoline engine and HPK, HPL, HPM, HPN, HPP or H15 rear axles)
- TranSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Front axle, 10,000 lbs. (4536 kg) capacity - Up to 53 degree turn angle. Steering Gear Series: ZF8016

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 28, 2007 11:58:28 AM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Front suspension, tapered leaf, 10,000 lbs. (4536 kg) capacity (Requires FM8 and FM6 front axle)
- Front shock absorber, diameter 1.375" (35mm)
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E- Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheels; N/A with FL3 front axle)
- Front tire size, 245/75R22.5G - 9350 lbs. (4241 kg) capacity, (With R4A Goodyear requires R3C front premium tread; N/A with Michelin)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire tread, premium highway
- Rear axle, single-speed, Dana 19060S, 19,000 lbs. (8618 kg) capacity - includes 75W-90 synthetic lubricant and National brand oil seals (Requires GN0, GN2, GN8, GR9, GP1, GP0 or G40 rear suspension) (N/A with FL3 front axle)
- Rear wheel drive
- Rear axle ratio, 7.17:1 (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle or HPM, H15 two-speed rear axle)
- Rear suspension, multi-leaf, 19,000 lbs. (8618 kg) capacity (Requires HPK or HPL single rear axle or HPM two-speed rear axle)
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle, or HPM, H15 or H25 two-speed rear axle) (Not available with YWM, YWP or YRN 22.5" rear tires)
- Rear tire size, 245/75R22.5G - 17,200 lbs. (7802 kg) capacity (With S4A Goodyear requires S3C rear premium tread or S3H rear highway traction tread; N/A with Michelin)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire tread, premium highway
- Wheelbase, 140" (355.6 cm) - with 72" (182.9 cm) CA and 135.3" (343.7 cm) CE, (With diesel engine requires NPY exhaust)
- Frame, painted semi-gloss black 6mm rail - 50,000 psi (344,750 kPa) yield strength, steel frame, SAE J1392-050XLK steel, dimensions 9 1/2" x 3" x 1/4" section modulus 9.58 cu. in., RBM 479,000

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Fuel tank, single, 50-gallon (189.2L) fuel capacity - driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines
- Steering, power - ZF variable ratio power
- Brake system, hydraulic, split - with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391 mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (64 mm) diameter pistons with 8,000 lb. (3629 kg) front axle, (70 mm) diameter pistons with 10,000 lb. (4536 kg) front axle
- Parking brake, hand lever operated transmission mounted drum brake

SAFETY

- Brake system, hydraulic, split - with 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 28, 2007 11:58:28 AM

Page 11

APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac Gmc ITEM NO(s): Spec # 3958-0136
 MAKE OF TRUCK: Gmc MODEL: C7500 C7502 ^{Topkick} GVWR 24,200 # lbs.
 PAYLOAD: 15356 # W.B. 152 " C.A. 84 " C.E. 135.30 "
 ENGINE: (GAS - DIESEL) Diesel MAKE: Gm-Isuzu-Duramax MODEL: LYA, 7.8 SAE H.P. 215
 FUEL TANK(S) CAPACITY: 100 (GALS. TOTAL) TRANSMISSION: Allison 2200 6-spd
 SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 9500 lbs. AUX. N/A lbs.
 AXLES: FRONT 8000 lbs. REAR 19000 lbs. REAR RATIO 5.57
 ALTERNATOR: 100 amps. BATTERY Dual 750 1500 cca. Permanant
 TIRE SIZE: FRONT 9R22.5 F PR REAR 9R22.5 F PR SINGLE _____ DUAL ✓ M&S Rear
 TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XUE/YUE
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

* Note GVWR & Payload Can be increased to 26000# / 17062 by upgrading to 10R22.5 F Tires. at \$1010⁰⁰ additional

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS (G.V.W.R. 33,000 lbs., min.)*

MODEL-2008 CURRENT NEW

	<u>INT'L</u> <u>4400/7400</u>	<u>CHEV/GMC</u> <u>C7C042</u>	<u>FORD</u> <u>F750</u>
Wheelbase (inches)	169	170	182
C.A. (inches)	102	102	108
Engine: Diesel, Type	DT 466	Duramax	CAT C7
Size	7.8L	7.8L	7.2L
No. of Cylinders	6	6	6
Gross H.P.,250 min.	260	260	275
Torque	800/1400	660@1450	800/1440
Transmission:		Allison	
6-Speed, 3000RDS		3000RDS	
		or	
		3500RDS	
Axle, Min. Cap. lbs.	12,000	12,000	12,000
Front, 12,000 minimum			
Rear, 21,000 minimum, with Single	21,000	21,000	21,000
Speed Rear Axle, with Driver Controlled			
Locking Differential			
Ratios for minimum			
loaded road speed of			
approx. 68 mph.			
Springs, Min. Cap. at Ground			
Front-lbs. each	6,000	6,000	6,000
Rear-lbs. each, 11,750 minimum	11,750	11,750	11,750
Aux. lbs. each, multi-leaf	2,250	4,500	2,250

*Body specs.: 0158/Dump Body, 0161/Stake Body, 0165/Alum. Van Body, 0167/Painted Van Body

Tires, Truck, Tubeless, Radial, 11R22.5G (14PR) minimum. Front to be Highway Tread, Rear duals-Traction Drive Tread, Goodyear Unisteel G-164 RTD or approved equal. Same Mfg. Front and Rear.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.
- Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- Pre-delivery inspection and servicing.
- Radio - AM/FM Manufacturers Standard, Factory Installed
- Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- Seats-Split Bench type, unless otherwise specified
- Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.

- ☑ Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- ☑ Speed Control, Factory Installed
- ☑ Steering-Power, Tilt Wheel
- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- ☑ Alternator-100 amp., minimum, Reference 22SI or approved equal.
- ☑ Battery(s)-12 Volt; 1,250 CCA minimum.
- ☑ Brakes-Full air. Current FMVSS. Dust plates. Air dryer with spin on filter, Automatic Drain Valves. Automatic slack adjusters.
- ☑ Cab assist handles-right and left.
- ☑ Engine Safety Devices-Warning light and audible alarm system activated when
- ☑ engine oil pressure falls below safe operating limit or when water temperature exceeds safe operating limit. Automatic engine shut-down with low oil pressure or high coolant temperature.
- ☑ Frame-Resisting bending moment 1,275,200 in.-lbs., min., Single Rail Frame
- ☑ Fuel Tanks-50 gallon each L.H. & R.H., center step tanks.
- ☑ Fuel/Water Separator with Heater.
- ☑ Heater-Engine block, 110/120 VAC
- ☑ Hood, Tilt type, with Butterfly Opening. GMC: Butterfly openings not available
- ☑ Horns-Dual, air, Single Base, with Covers.
- ☑ Mirrors, Rear View, Outside. L.H. & R.H. West Coast Type, 6" x 16", installed, with stainless steel, powder coated steel, or composite heads, brackets, and hardware.
- ☑ Shock absorbers, Heavy Duty, Front and Rear.
- ☑ Starting Aid-Cold weather, ether type or glow plug. GMC: Intake heater
- ☑ Steering-Power.
- ☑ Switches (6), outfitter, with remote power module (MDOT) GMC: Panel only – Switches & Power module must be supplied by body upfitter
- ☑ Tachometer.
- ☑ Throttle, Electronic, High Idle Engine RPM Control.
- ☑ Wheels-Hub Piloted disc.

PRICING SHEET

<u>TRUCK: CAB AND CHASSIS (G.V.W.R. 33,000 lbs., min.)*</u>	
Mich. Spec. #3958-0160	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: Topkick C7500 F.O.B. - Dealership Delivery Cost Per Mile \$1.80	\$55,191.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
Spec # 3958-0160

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC7C042	2008 GMC TC7500 Regular Cab	\$45,975.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C7C042	CUSTOM/BASE MODEL	\$0.00
VEHICLE APPLICATION		
RQ2	TRUCK APPLICATION	INC
GVWR		
___	NO 25,950# GVWR RATING DESIRED	\$0.00
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
DIESEL ENGINE		
LYC	ISUZU DIESEL 6H 7.8L I6, 260 HP (194 KW) @ 2200 RPM AND 660 LB-FT TORQUE (895 N-M) @ 1450 RPM	\$19,942.00
AIR CLEANER		
KNB	DRY-TYPE STANDARD FILTER ELEMENT	\$0.00
FUEL/WATER SEPARATOR		
NWB	RACOR FRAME-MOUNTED SPIN-ON TYPE	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
ENGINE BLOCK HEATER		
KB3	1250-WATT, 110V	\$50.00
ALTERNATOR		
K60	22SI, DELCO 100-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	\$0.00
ALARM		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NB5	SINGLE HORIZONTAL-DRIVER SIDE MOUNTED INSIDE FRAME RAIL	\$0.00
POWER TAKE OFF		
PTO	ELECTRONIC ACTIVATION SWITCH, (ELECTRIC HAND THROTTLE), IP MOUNTED	\$100.00
AUTOMATIC TRANSMISSION		
MWZ	ALLISON 3500 RDS SERIES (WIDE RATIO) 6-SPEED	\$4,150.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
FRONT AXLE		
FS7	12,000 LBS. (5443 KG) CAPACITY	\$203.00
FRONT SUSPENSION		
F25	MULTI-LEAF, 12,000 LBS. (5443 KG) CAPACITY	\$25.00
FRONT WHEEL		
RPQ	22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC	\$0.00
FRONT TIRE		
XWL	11R22.5G-12,350 LBS. (5602 KG) CAPACITY	\$220.00
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
FRONT TIRE TREAD		
R3C	PREMIUM, HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		
HPN	DANA 21060D, 21,000 LBS. (9526 KG) CAPACITY	\$1,421.00
AXLE RATIO		
009	5.29:1	\$0.00
REAR SUSPENSION		
GP1	MULTI-LEAF, 23,500 LBS. (10,660 KG) CAPACITY,	\$41.00
REAR AUXILIARY SPRINGS		
GG8	MULTI-LEAF, 4500 LBS. (2041 KG), CAPACITY	\$135.00
REAR SHOCK ABSORBER		
G68	REAR SHOCK ABSORBERS	\$58.00
REAR WHEEL		
RPR	22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC	\$0.00
REAR TIRE		
YWL	11R22.5G-23,000 LBS. (10,430 KG) CAPACITY	\$460.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3J	HIGHWAY TRACTION BLOCK	\$0.00
WHEELBASE		
EH8	170" (431.8 CM)	\$152.00
FRAME RAIL		
F02	RAIL, PAINTED SEMI-GLOSS BLACK 10MM-120,000 PSI (827,400 KPA) YIELD STRENGTH,	\$569.00
FUEL TANK		
NNQ	DUAL, 100-GALLON (380L) TOTAL FUEL CAPACITY,	\$370.00
BRAKE SYSTEM		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
BRAKE SYSTEM		
JE4	AIR, ABS-4-CHANNEL BENDIX BRAKE SYSTEM 'S' CAM TYPE	\$1,778.00
BRAKE EQUIPMENT		
JRF	REAR DUST SHIELDS	\$0.00
AIR COMPRESSOR		
KK3	HALDEX 292 WATER-COOLED 12.9 CFM	INC
HORN		
UUE	SINGLE, DUAL-TRUMPET AIR	\$84.00
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$172.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$939.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$200.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$165.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 4

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: acliix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
OPTIONS TOTAL		\$31,234.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

EXTERIOR

- Paint, solid, upper color, Summit White
- Paint, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumpers, front steel, painted argent - Bumper thickness 3.9 mm
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops
- Horn, single electric mounted inside engine compartment

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

INTERIOR

- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out.
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Center console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors
- Stepwell storage areas at each door. Includes storage cover
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

MECHANICAL

- Truck application NOTE: Federal Excise Tax (FET) of 12% must be paid on the final selling price for trucks with GVWR's of 33,001 lbs. and above. Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines. PLEASE NOTE: The 12% FET tax is NOT included in AutoBook Pricing.
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm, 440 lb-ft (594 N-m) torque @ 3,200 rpm. - Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry-type standard filter element (Requires gasoline engine)
- Underhood air cleaner restriction gauge
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" and 24.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire company specifications for details.
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Requires gasoline engine)
- Exhaust system, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter. With diesel engines 409 stainless-steel exhaust system, integrated oxidation catalyst on Isuzu diesel, Diesel Particulate Filter (DPF) and exhaust gas cooler. (N/A with FQT wheelbase with Isuzu diesel engines and not available with EG9 wheelbase with Caterpillar engine)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. NOTE: Deletes transmission PTO gear with Allison MTX/MBZ 2200HS, MTY 2300HS, MHE 2350HS, MPS 2500HS, and MPQ 2550HS Series transmissions.
- Transmission, automatic, Allison 2300 HS/RDS (Close Ratio) 5-speed - No parking pawl. Includes 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), Available with a Gross Vehicle Weight up to 33,000 lbs. (15,000 kg) and a Gross Combined Weight up to 33,000 lbs. (15,000 kg). When "PTX" is selected, it does not include power take-off gear in the Allison 2300 HS Highway Series transmission. To include PTO gear please order with RPO "PTO" for Allison 2300 RDS Rugged Duty Series transmission. Includes transmission oil cooler in radiator, increased cooling and column shift. (Requires gasoline engine and HPK, HPL, HPM, HPN, HPP or H15 rear axles)
- TranSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Front axle, 10,000 lbs. (4536 kg) capacity - Up to 53 degree turn angle. Steering Gear Series: ZF8016

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 29, 2007 10:30:46 AM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Front suspension, tapered leaf, 10,000 lbs. (4536 kg) capacity (Requires FM8 and FM6 front axle)
- Front shock absorber, diameter 1.375" (35mm)
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheels; N/A with FL3 front axle)
- Front tire size, 245/75R22.5G - 9350 lbs. (4241 kg) capacity, (With R4A Goodyear requires R3C front premium tread; N/A with Michelin)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire tread, premium highway
- Rear axle, single-speed, Dana 19060S, 19,000 lbs. (8618 kg) capacity - includes 75W-90 synthetic lubricant and National brand oil seals (Requires GN0, GN2, GN8, GR9, GP1, GP0 or G40 rear suspension) (N/A with FL3 front axle)
- Rear wheel drive
- Rear axle ratio, 7.17:1 (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle or HPM, H15 two-speed rear axle)
- Rear suspension, multi-leaf, 19,000 lbs. (8618 kg) capacity (Requires HPK or HPL single rear axle or HPM two-speed rear axle)
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle, or HPM, H15 or H25 two-speed rear axle) (Not available with YWM, YWP or YRN 22.5" rear tires)
- Rear tire size, 245/75R22.5G - 17,200 lbs. (7802 kg) capacity (With S4A Goodyear requires S3C rear premium tread or S3H rear highway traction tread; N/A with Michelin)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire tread, premium highway
- Wheelbase, 140" (355.6 cm) - with 72" (182.9 cm) CA and 135.3" (343.7 cm) CE, (With diesel engine requires NPY exhaust)
- Frame, painted semi-gloss black 6mm rail - 50,000 psi (344,750 kPa) yield strength, steel frame, SAE J1392-050XLK steel, dimensions 9 1/2" x 3" x 1/4" section modulus 9.58 cu. in., RBM 479,000

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Fuel tank, single, 50-gallon (189.2L) fuel capacity - driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines
- Steering, power - ZF variable ratio power
- Brake system, hydraulic, split - with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391 mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (64 mm) diameter pistons with 8,000 lb. (3629 kg) front axle, (70 mm) diameter pistons with 10,000 lb. (4536 kg) front axle
- Parking brake, hand lever operated transmission mounted drum brake

SAFETY

- Brake system, hydraulic, split - with 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 10:30:46 AM

Page 11



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac GMC ITEM NO(S). Spec # 3958-0160
 MAKE OF TRUCK: GMC MODEL: C7500 ^{Topkick} C7C042 GVWR 33000 lbs. ✓
 PAYLOAD: 22536 # W.B. 170" ✓ C.A. 102" ✓ C.E. 171.10" ✓
 ENGINE: (GAS - DIESEL) Diesel ✓ MAKE: Gm/Isuzu Duramax MODEL: LYC, 7.8 SAE H.P. 260 ✓
 FUEL TANK(S) CAPACITY: 100 (GALS. TOTAL) TRANSMISSION: Allison 3500 6-spd ✓
 SPRING CAP. @ GROUND EACH: FRONT 6000 lbs. ✓ REAR 11750 lbs. AUX. 4500 lbs. ✓
 AXLES: FRONT 12000 lbs. ✓ REAR 21000 lbs. ✓ REAR RATIO 5.29
 ALTERNATOR: 100 amps. ✓ BATTERY Dual 750 cca. ✓
 TIRE SIZE: FRONT 11R22.5 F PR REAR 11R22.5 F PR SINGLE _____ DUAL ✓ M&S ✓
 TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XWL/YWL
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.

TRUCK: CAB AND CHASSIS (G.V.W.R. 27,000 LBS., MIN.)*

MODEL-2008 CURRENT NEW

	<u>FORD</u> <u>F750</u>	<u>INTL</u> <u>4300 M7</u>	<u>CHEV/GMC</u> <u>C7C042</u>
Wheelbase (inches)	230	217	224
C.A. (inches)	156	150	153
Engine: Diesel, Type	Cummins ISB	MaxxForce 7	Duramax
Size	6.7L	6.4L	7.8L
Gross HP-210 min.	220	215	215
Transmission: 5 speed			Allison 2350HS 6 spd w/park pawl
Allison Auto, 2000 series			
Axle, Min. Cap.-lbs.			
Front	8,500	8,000	8,000
Rear	19,000	19,000	19,000
Ratio for minimum loaded road speed of approx. 68 mph.			
Springs, Min. Cap. at Ground			
Front-lbs. each	4,250	4,000	4,000
Rear-lbs. each	10,000	10,000	10,500
Aux. lbs. each	2,250	2,250	no rating

*See Mich. 3958-0165 or 3958-0167 for body.

Tires, Truck, Tubeless, Radial, 11R22.5G (14PR) minimum. Front to be Highway Tread, Rear duals-Traction Drive Tread, Goodyear Unisteel, G-164 RTD or approved equal. Same Mfg. Front and Rear.

TO BE STANDARD FACTORY EQUIPPED AS FOLLOWS:

The items listed below are to be supplied on all trucks, even though they may be optional with the manufacturer. Therefore, these specifications are to be furnished on all vehicles:

- 12 Volt auxiliary outlet
- Air Conditioning - All trucks
- Anti-freeze protection, to -30°F.
- Arm Rest-Driver's side.
- Color-Manufacturers Standard to be selected.
- Coolant System-Maximum Size Available, including the Heaviest Duty Radiator
- Dome Light.
- Electric wiring-All wiring passing through holes in metal or non-metal wearing surfaces, which could cause wear of the insulation, shall be adequately protected by rubber or plastic grommets, and/or non-metallic conduit. Ends of all wires shall be adequately anchored to prevent loosening.
- Frame length-on all body installations without hoists the cab to end of frame length shall be the same length as the body being mounted, plus the length of any setback.
- Fuel Tanks, Diesel, with sending unit and magnetic drain plug, on all trucks over 21,000 G.V.W.R., painted Black and labeled "Diesel Fuel Only".
- Hub caps on all pickups and vans up to and including 10,000 G.V.W.R. If not available from dealer cap nuts shall be furnished.
- Keys-(2) sets with code numbers; shall be with vehicle at time of delivery.
- Mirrors-All trucks are to be equipped with R.H. and L.H. outside rear-view mirrors to comply with Michigan laws; all trucks up to and including 15,000 G.V.W.R. shall be equipped with inside rear-view mirror. In all cases, outside R.H. & L.H. rear view mirrors shall provide full vision past all body installations. Mirrors shall be of stainless steel or high impact plastic construction unless denoted otherwise in individual truck specifications. All West Coast Type or Below Eye Level Camper Style Mirrors shall have stainless steel or high impact plastic heads, brackets, and hardware.
- Mud flaps, Anti-Sail Type, when required, are to be plain, rubber 1/4" thick, without advertising on either side.
- Painting-preclean and metal prep, any bare metal surfaces prior to applying a compatible red oxide or zinc chromate primer. When painting over a manufacturer's standard paint, metal prepping and primer may be omitted, provided an acceptable bond can be achieved.
- Equipment mounting- when mounting equipment on truck cab and chassis, all holes shall be drilled or punched. There shall be no flame cutting or welding on the frame side rails.
- Paint codes-factory paint codes shall be furnished with all vehicles; for all after market painting both the brand and paint code shall be furnished.
- Pre-delivery inspection and servicing.
- Radio - AM/FM Manufacturers Standard, Factory Installed
- Seat Belts with Shoulder Harness (3-Point Restraint System for Driver & Passenger)
- Seats-Split Bench type, unless otherwise specified
- Shock absorbers-(Heaviest Duty Available), front all trucks. Rear, up to and including 15,000 G.V.W.R.
- Spare tire, or Rim, not to be furnished unless specified. If specified, tires to be of same mfg., tread design to be same as front tires.
- Speed Control, Factory Installed
- Steering-Power, Tilt Wheel

- ☑ Sun visors-dual.
- ☑ Jack-Furnish on trucks up to and including 12,000 G.V.W.R.
- ☑ Windshield wipers-dual, intermittent speed electric, with automatic type washers.

All items removed for installation of optional equipment shall be returned to the State of Michigan.

TO BE EQUIPPED IN COMPLIANCE WITH ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND REGULATIONS. ALL VEHICLES MUST BE EQUIPPED TO COMPLY WITH ALL REQUIREMENTS OF THE MICHIGAN MOTOR VEHICLE CODE.

- **Delete: On GM vehicles, OnStar and XM radio are deleted.**

ADDITIONAL OPTIONS:

These options are in addition to the options listed above as “STANDARD FACTORY EQUIPPED” and are to be included on this vehicle.

- ☑ Alternator-100 amp., minimum, Reference 22SI or approved equal.
- ☑ Battery(s)-12 Volts; 1500 CCA, Min.
- ☑ Brakes-Full air. Current FMVSS. Dust plates. Air dryer with spin on filter, Automatic Drain Valves. Automatic slack adjusters.
- ☑ Cab assist handles-right and left.
- ☑ Exhaust (PIPE ONLY) - Vertical installation.
- ☑ Fuel Tanks-L.H. and R.H. 45 (min.) gallon tanks, frame mounted.
- ☑ Fuel/Water Separator with Heater.
- ☑ Heater-Engine block, 110/120 VAC
- ☑ Hood, Tilt.
- ☑ Horns-Electric, dual.
- ☑ Mirrors-Rear View, Outside. L.H. and R.H. West Coast type. 6' x 16"; installed, with stainless steel or powder coated steel heads, brackets, and hardware. GMC: Composite Heads
- ☑ Oil Seals (wet)-front axle.
- ☑ Shock absorbers, Heavy Duty, Front and Rear.
- ☑ Starting Aid-Cold weather, ether type or glow plug. GMC: Intake Heater
- ☑ Steering-Power.
- ☑ Switches (6), outfitter, with remote power module (MDOT) GMC: Panel only, switches & remote power module available through upfitter of body
- ☑ Tachometer.
- ☑ Throttle, Electronic, High Idle Engine RPM Control.
- ☑ Wheels-Hub Piloted disc.

PRICING SHEET

TRUCK: CAB AND CHASSIS (G.V.W.R. 27,000 LBS., MIN.)*	
Mich. Spec. #3958-0164	
Standard Equipped Per above Specification (Including options as specified above)	Standard Equipped Cost
Make: GMC Model: Topkick C7500 F.O.B. - Dealership Delivery Cost Per Mile \$1.80	\$48,574.00*
Final Point of Assembly: Flint, MI	
<u>Dealer Information</u>	
Dealer Name: Red Holman Pontiac GMC	
Street Address: 35300 Ford Road	
City: Westland	State: MI
	Zip: 48185
Contact Name: Albert Li	
Telephone: (800) 482-3032	
Cell: (734) 637-6643	
E-mail: aclixx@hotmail.com	

*Please Note: A vehicle order confirmation sheet is included for each vehicle. These documents shall include all the "standard options" as listed for the State of Michigan standard specification.

Vehicle Order Confirmation Sheet
 Spec # 3958-0164

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED MODEL - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
TC7C042	2008 GMC TC7500 Regular Cab	\$45,975.00

SELECTED VEHICLE COLORS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>Code</u>	<u>Description</u>
-	Interior: No color has been selected.
-	Exterior 1: No color has been selected.
-	Exterior 2: No color has been selected.

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

CATEGORY

<u>Code</u>	<u>Description</u>	<u>MSRP</u>
PREFERRED EQUIPMENT GROUP		
C7C042	CUSTOM/BASE MODEL	\$0.00
VEHICLE APPLICATION		
RQ2	TRUCK APPLICATION	INC
GVWR		
	NO 25,950# GVWR RATING DESIRED	\$0.00
EMISSION		
FE9	FEDERAL REQUIREMENTS	INC
DIESEL ENGINE		
LYA	ISUZU DIESEL 6H 7.8L I6, 215 HP (160 KW) @ 2200 RPM AND 560 LB-FT TORQUE (759 N-M) @ 1450 RPM	\$16,466.00
AIR CLEANER		
KNB	DRY-TYPE STANDARD FILTER ELEMENT	\$0.00
FUEL/WATER SEPARATOR		
NWB	RACOR FRAME-MOUNTED SPIN-ON TYPE	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 1

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclbx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
ENGINE BLOCK HEATER		
KB3	1250-WATT, 110V	\$50.00
HIGH IDLE SWITCH		
UF3	HIGH IDLE SWITCH	\$31.00
ALTERNATOR		
K60	22SI, DELCO 100-AMP MAXIMUM	\$0.00
BATTERY		
TNL	DUAL AC DELCO, 750 CCA, 12V	\$0.00
ALARM		
KPJ	AUTOMATIC ENGINE SHUTDOWN WITH ALARM	INC
EXHAUST SYSTEM		
NPY	DRIVER SIDE HORIZONTAL EXHAUST WITH VERTICAL TAIL PIPE	\$518.00
POWER TAKE OFF		
PTX	OPTION PTO NOT REQUIRED	\$0.00
AUTOMATIC TRANSMISSION		
MHE	ALLISON 2350 HS/RDS SERIES 6-SPEED	\$705.00
TRANSMISSION FLUID		
MBT	TRANSYND SYNTHETIC AUTOMATIC TRANSMISSION FLUID	INC
FRONT AXLE		
FM8	8000 LBS. (3629 KG) CAPACITY	-\$459.00
FRONT OIL SEALS		
FF1	FRONT OIL SEALS WITH CLEAR CAPS	\$21.00
FRONT SUSPENSION		
FSN	TAPERED LEAF, 8000 LBS. (3629 KG) CAPACITY	-\$51.00
FRONT WHEEL		
RPQ	22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC	\$0.00
FRONT TIRE		
XWL	11R22.5G-12,350 LBS. (5602 KG) CAPACITY	\$220.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 2

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
FRONT TIRE BRAND		
R4A	GOODYEAR	\$0.00
FRONT TIRE TREAD		
R3C	PREMIUM, HIGHWAY	\$0.00
SINGLE SPEED REAR AXLE		
HPK	DANA 19060S, 19,000 LBS. (8618 KG) CAPACITY	INC
AXLE RATIO		
009	5.29:1	\$0.00
REAR SUSPENSION		
GN8	MULTI-LEAF, 21,000 LBS. (9526 KG) CAPACITY	\$20.00
REAR AUXILIARY SPRINGS		
G60	SINGLE TAPERED LEAF, NOT RATED	\$88.00
REAR SHOCK ABSORBER		
G68	REAR SHOCK ABSORBERS	\$58.00
REAR WHEEL		
RPR	22.5" X 8.25" (58.9 CM X 21 CM), STEEL DISC	\$0.00
REAR TIRE		
YWL	11R22.5G-23,000 LBS. (10,430 KG) CAPACITY	\$460.00
REAR TIRE BRAND		
S4A	GOODYEAR	\$0.00
REAR TIRE TREAD		
S3J	HIGHWAY TRACTION BLOCK	\$0.00
WHEELBASE		
EK6	224" (568.9 CM)	\$619.00
FRAME RAIL		
FD5	RAIL, PAINTED SEMI-GLOSS BLACK 8MM-80,000 PSI (551,600 KPA) YIELD STRENGTH,	\$0.00
FUEL TANK		

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 3

Prepared By:
 Albert Li
 Red Holman Pontiac GMC
 35300 Ford Rd
 Westland, MI 48185
 Phone: (734) 721-1144
 Fax: (734) 721-1780
 Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
FUEL TANK		
NNQ	DUAL, 100-GALLON (380L) TOTAL FUEL CAPACITY,	\$370.00
BRAKE SYSTEM		
JE4	AIR, ABS-4-CHANNEL BENDIX BRAKE SYSTEM 'S' CAM TYPE MERITOR,	\$1,778.00
BRAKE EQUIPMENT		
JRF	REAR DUST SHIELDS	\$0.00
AIR COMPRESSOR		
KK3	HALDEX 292 WATER-COOLED 12.9 CFM	INC
HORN		
U08	DUAL-NOTE, ELECTRIC	\$21.00
DRIVER CONVENIENCE PACKAGES		
ZQ3	DRIVER CONVENIENCE PACKAGE	\$223.00
MISCELLANEOUS CAB EQUIPMENT		
N33	TILT-WHEEL ADJUSTABLE STEERING	INC
K34	CRUISE CONTROL,	INC
AIR CONDITIONING		
C60	AIR CONDITIONING	\$939.00
DRIVER SEAT		
AS4	HIGH-BACK BUCKET, FIXED HEIGHT, MANUAL ADJUSTER	INC
PASSENGER SEAT		
A59	TWO-PERSON, WITHOUT STORAGE	\$200.00
AIRBAGS		
AL3	SUPPLEMENTAL INFLATABLE RESTRAINTS NOT INCLUDED	INC
RADIO		
UM7	DELCO AM-FM STEREO RADIO	\$165.00
EXTERIOR MIRRORS		
DB5	MANUAL, 102" (259 CM) WIDE LOAD, INTEGRAL ARM, INTEGRAL CONVEX MIRROR	INC

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
 ©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 4

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

SELECTED MODEL & OPTIONS

SELECTED OPTIONS - 2008 Fleet/Non-Retail TC7C042 Regular Cab

<u>CATEGORY</u>		<u>MSRP</u>
<u>Code</u>	<u>Description</u>	
PAINT		
ZY1	SOLID NON-METALLIC PAINT	INC
INTERIOR TRIM		
69I	VERY DARK PEWTER	INC
SEAT TRIM		
_V	VINYL SEAT TRIM	INC
OPTIONS TOTAL		\$22,442.00

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 5

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

EXTERIOR

- Paint, solid, upper color, Summit White
- Paint, solid, lower color, Summit White
- Exterior roof drip moldings
- Bumpers, front steel, painted argent - Bumper thickness 3.9 mm
- Steps under cab doors
- Front mud flaps
- Integral grille and fenders - The grille is the same color as hood with single halogen headlamps. Entry steps under cab doors are based upon fuel tank type
- Roof marker lamps
- Daytime running lamps
- Windows, Solar-Ray tinted. Light tinted windshield and side window glass with light transmissivity of 70%
- Mirrors, manual, 102" (259 cm) wide load, integral arm, integral convex mirror - black molded composite 12" x 7" (30.5cm x 17.8 cm) with 6" x 7" (15.2cm x 17.8cm) convex section
- Windshield wipers, 2-speed and intermittent, with pulse washers
- Provisions for mounting front license plate
- Positive door stops
- Horn, single electric mounted inside engine compartment

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM

©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 6

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

INTERIOR

- Seat, driver, high-back bucket, Fixed height, manual adjuster - storage in the seat riser with a small lip at the front to help prevent contents from sliding out.
- Seat, passenger, high-back bucket, Fixed height, manual back angle adjuster - storage in the seat riser with a small lip at the front to stop contents from sliding out
- Seat trim, vinyl, Very Dark Pewter
- Interior trim, Very Dark Pewter (Requires 69V Very Dark Pewter Vinyl or 69C Very Dark Pewter Cloth)
- Center console - located next to driver's seat and two cupholders
- Molded vinyl floor covering
- Steering wheel 16"
- Two sided single common key for doors and ignition
- Headlamp warning buzzer
- Warning tone, key-in-ignition
- Tachometer
- Electronic engine hour meter
- Engine "Check gauges" telltale light and buzzer, oil pressure gauge
- Gauges, low oil pressure and coolant level, high coolant and engine oil temperature
- Vinyl door trim panels - with storage pockets, beverage holders, and reflectors
- Stepwell storage areas at each door. Includes storage cover
- Cloth headliner
- Sunshades, passenger side and driver side, vinyl-covered
- Coat hooks (2) located on cab back panel
- Provisions for stereo - Includes AM/FM antenna, lead wiring for speakers, and separate door chime module (N/A with ZQ2 power convenience option)
- Air conditioning not desired - this option should be ordered only when a customer does not require air conditioning
- Powerpoints - two in-cab power sources (in addition to optional cigarette lighter) for electrical plug-in accessories

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 29, 2007 12:34:35 PM

Page 7

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Underhood bodybuilder connections accessory power supply - Provides 12V power supply from the battery with two separate 30 amp fused circuits

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 8

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

MECHANICAL

- Truck application NOTE: Federal Excise Tax (FET) of 12% must be paid on the final selling price for trucks with GVWR's of 33,001 lbs. and above. Trucks that are used primarily to tow a trailer may be liable to Federal Excise Tax (FET) - check with IRS for guidelines. PLEASE NOTE: The 12% FET tax is NOT included in AutoBook Pricing.
- Engine, Vortec 8.1L MD gasoline V8, 295 hp (220 kw) @ 3600 rpm, 440 lb-ft (594 N-m) torque @ 3,200 rpm. - Oil Level Sensor: Warning sensor for low oil levels
- Air cleaner, dry-type standard filter element (Requires gasoline engine)
- Underhood air cleaner restriction gauge
- Road Speed Governor, controlled by the speed rating of the tires ordered. All vehicles with 19.5" tire sizes and with most 22.5" and 24.5" tires have speed governed to a maximum of 75 mph (120 kph). A few aggressive tire tread patterns may have lower maximum speed ratings that limit governed speed to 65 or 55 mph - see tire company specifications for details.
- Alternator, AD244, Delco-Remy 150-amp maximum (Requires gasoline engine)
- Battery, single AC Delco, 600 CCA, 12V - 115-minute reserve capacity @ 27 degrees C, 600 CCA @ -18 degrees C, (Requires gasoline engine)
- Exhaust system, single horizontal - driver side mounted inside frame rail, with gasoline engine stainless-steel exhaust with catalytic converter. With diesel engines 409 stainless-steel exhaust system, integrated oxidation catalyst on Isuzu diesel, Diesel Particulate Filter (DPF) and exhaust gas cooler. (N/A with FQT wheelbase with Isuzu diesel engines and not available with EG9 wheelbase with Caterpillar engine)
- Option PTO not required - This option should only be ordered when a customer specifically does not require an electric hand throttle for use with power-take-off provisions. NOTE: Deletes transmission PTO gear with Allison MTX/MBZ 2200HS, MTY 2300HS, MHE 2350HS, MPS 2500HS, and MPQ 2550HS Series transmissions.
- Transmission, automatic, Allison 2300 HS/RDS (Close Ratio) 5-speed - No parking pawl. Includes 4th Generation Electronic Controls and 0.71 overdrive. Torque rating: 450 lb-ft (610 N-m), Available with a Gross Vehicle Weight up to 33,000 lbs. (15,000 kg) and a Gross Combined Weight up to 33,000 lbs. (15,000 kg). When "PTX" is selected, it does not include power take-off gear in the Allison 2300 HS Highway Series transmission. To include PTO gear please order with RPO "PTO" for Allison 2300 RDS Rugged Duty Series transmission. Includes transmission oil cooler in radiator, increased cooling and column shift. (Requires gasoline engine and HPK, HPL, HPM, HPN, HPP or H15 rear axles)
- TranSynd synthetic automatic transmission fluid (Available with automatic transmissions only)
- Front axle, 10,000 lbs. (4536 kg) capacity - Up to 53 degree turn angle. Steering Gear Series: ZF8016

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.
Customer File:

December 29, 2007 12:34:35 PM

Page 9

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclixx@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Front suspension, tapered leaf, 10,000 lbs. (4536 kg) capacity (Requires FM8 and FM6 front axle)
- Front shock absorber, diameter 1.375" (35mm)
- Front wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat), 13,220 lbs. (5996 kg) capacity, (Requires QH4 rear wheels; N/A with FL3 front axle)
- Front tire size, 245/75R22.5G - 9350 lbs. (4241 kg) capacity, (With R4A Goodyear requires R3C front premium tread; N/A with Michelin)
- Front tire manufacturer code, Goodyear (Requires S4A Goodyear)
- Front tire tread, premium highway
- Rear axle, single-speed, Dana 19060S, 19,000 lbs. (8618 kg) capacity - includes 75W-90 synthetic lubricant and National brand oil seals (Requires GN0, GN2, GN8, GR9, GP1, GP0 or G40 rear suspension) (N/A with FL3 front axle)
- Rear wheel drive
- Rear axle ratio, 7.17:1 (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle or HPM, H15 two-speed rear axle)
- Rear suspension, multi-leaf, 19,000 lbs. (8618 kg) capacity (Requires HPK or HPL single rear axle or HPM two-speed rear axle)
- Rear wheels, 22.5" x 7.5" (58.9 cm x 19 cm), steel disc - Accuride 10-hole, flange nut, hub piloted, 11.25" (28.5 cm) bolt circle, painted Gray (E-Coat) 26,440 lbs. (11,993 kg) capacity, (Requires HPK, HPL, HPN, HPP or HPT single speed rear axle, or HPM, H15 or H25 two-speed rear axle) (Not available with YWM, YWP or YRN 22.5" rear tires)
- Rear tire size, 245/75R22.5G - 17,200 lbs. (7802 kg) capacity (With S4A Goodyear requires S3C rear premium tread or S3H rear highway traction tread; N/A with Michelin)
- Rear tire manufacturer code, Goodyear (Requires R4A Goodyear)
- Rear tire tread, premium highway
- Wheelbase, 140" (355.6 cm) - with 72" (182.9 cm) CA and 135.3" (343.7 cm) CE, (With diesel engine requires NPY exhaust)
- Frame, painted semi-gloss black 6mm rail - 50,000 psi (344,750 kPa) yield strength, steel frame, SAE J1392-050XLK steel, dimensions 9 1/2" x 3" x 1/4" section modulus 9.58 cu. in., RBM 479,000

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 10

Prepared By:
Albert Li
Red Holman Pontiac GMC
35300 Ford Rd
Westland, MI 48185
Phone: (734) 721-1144
Fax: (734) 721-1780
Email: aclix@hotmail.com

2008 Fleet/Non-Retail GMC TC7500

STANDARD EQUIPMENT

STANDARD EQUIPMENT - 2008 Fleet/Non-Retail TC7C042 Regular Cab

- Fuel tank, single, 50-gallon (189.2L) fuel capacity - driver side, steel top tread plate, sump, drain and steps under cab on front passenger side. Provides clean back of cab and a black tethered fuel cap with gasoline engines, and a brass tethered fuel cap with diesel engines
- Steering, power - ZF variable ratio power
- Brake system, hydraulic, split - with 4-channel ABS disc-type Bosch Hydro Max high performance booster, tandem master cylinder provides independent front and rear circuits, front and rear disc Meritor calipers: 15 3/8" (391 mm) rotor diameter, 1 1/2" (39.1 mm) rotor thickness with (4) 2 1/2" (64 mm) diameter pistons with 8,000 lb. (3629 kg) front axle, (70 mm) diameter pistons with 10,000 lb. (4536 kg) front axle
- Parking brake, hand lever operated transmission mounted drum brake

SAFETY

- Brake system, hydraulic, split - with 4-channel ABS
- Air bags, Supplemental Inflatable Restraints not included
- Seat belt warning indicator
- Daytime running lamps

Report content is based on current data version referenced. Any performance-related calculations are offered solely as guidelines. Actual unit performance will depend on your operating conditions.

GM AutoBook, Data Version: 133.2, Data updated 12/25/2007 10:41:00 AM
©Copyright 1986-2005 Chrome Systems Corporation. All rights reserved.

Customer File:

December 29, 2007 12:34:35 PM

Page 11



APPENDIX B

TRUCK QUESTIONNAIRE FORMS

ALL BIDDERS MUST COMPLETE AND RETURN A QUESTIONNAIRE FORM WITH THE BID FOR EACH TRUCK ITEM TO BE CONSIDERED FOR AWARD OF THAT ITEM. Bids submitted without an adequately completed questionnaire form for EACH TRUCK ITEM will not be considered for award of that item. It is the responsibility of each bidder to copy this form in sufficient quantity to submit to Purchasing Operations prior to the scheduled bid due date. A single form may apply to more than one item, simply list the item numbers to which the questionnaire applies in the appropriate space. If part of the questionnaire does not apply, simply indicate "not applicable" in those spaces.

NAME OF BIDDER: Red Holman Pontiac GMC ITEM NO(s). Spec # 3958-0164
 MAKE OF TRUCK: GMC MODEL: Topkick C7500 TC7042GVWR 27000 lbs.
 PAYLOAD: 17081 # W.B. 224 ✓ C.A. 153 ✓ C.E. 249.1"
 ENGINE: (GAS - DIESEL) Diesel ✓ MAKE: Gm/Isuzu Duramax MODEL: LYA, 7.8 SAE H.P. 215 ✓
 FUEL TANK(S) CAPACITY: 100 (GALS. TOTAL) TRANSMISSION: Allison 2350 6-spd ✓
 SPRING CAP. @ GROUND EACH: FRONT 4000 lbs. REAR 10500 lbs. AUX. Not Rated lbs.
 AXLES: FRONT 8000 lbs. REAR 19000 lbs. REAR RATIO 5.29
 ALTERNATOR: 100 amps. BATTERY Dual 750 cca.
 TIRE SIZE: FRONT 11R22.5G PR REAR 11R22.5G PR SINGLE _____ DUAL ✓ M&S Rear
 TIRE: MAKE Goodyear STYLE NO. TBD MFG. CODE XWL/YWL
 HOIST: MAKE N/A MODEL N/A INSTALLING CO. N/A
 BODY: MAKE N/A MODEL N/A INSTALLING CO. N/A
 POWER LIFT GATE: MAKE N/A MODEL N/A CAPACITY N/A lbs.
 PLATFORM SIZE: N/A

OTHER EQUIPMENT INSTALLED BY BODY EQUIPMENT SUPPLIER AND/OR COMMENTS

This information must be returned with the bid document to Purchasing Operations, on or before the bid due date and time. However, if returned separately, it must be received by Purchasing Operations on or before the bid due date and time, and must comply with the sealed bid instructions as outlined in the ITB.