


**Prepared For:**  
STATE OF MICHIGAN  
OFFICE OF PURCHASING  
DEPT. OF MGT. & BUDGET  
LANSING, MI 48909-  
(517)373 - 0330  
Reference ID: MiDEAL- 0134  
  
MiDEAL 3958-0134D

**Presented By:**  
TRI COUNTY INTL TRUCKS  
Mark J Caracciolo  
5701 WYOMING St.  
DEARBORN MI 48126 -  
(313)584-7090

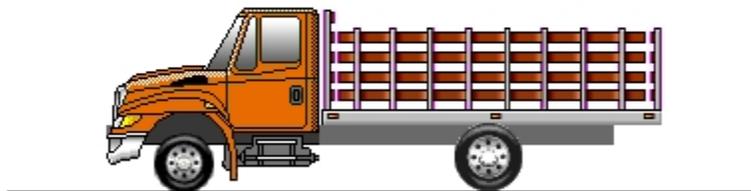

**Model Profile**  
**2011 4300M7 SBA LP 4X2 (MH065)**

<b>APPLICATION:</b>	Stake Flat
<b>MISSION:</b>	Requested GVWR: 25500. Calc. GVWR: 25500 Calc. Start / Grade Ability: 26.00% / 2.09% @ 55 MPH Calc. Geared Speed: 68.6 MPH
<b>FUEL ECONOMY:</b>	8.15 MPG @ 55 MPH
<b>DIMENSION:</b>	Wheelbase: 152.00, CA: 84.90, Axle to Frame: 63.00
<b>ENGINE, DIESEL:</b>	{International MaxxForce 7} EPA 07, 200 HP @ 2600 RPM, 560 lb-ft Torque @ 1400 RPM, 2800 RPM Governed Speed, 200 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 2100_RDS_P} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; With PTO Provision, Less Retarder, With 26,000-lb GVW & GCW Max., on/off hwy
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Dana Spicer D800-F} I-Beam Type, 8,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Dana Spicer 17060S} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends Gear Ratio: 5.57
<b>CAB:</b>	Conventional
<b>TIRE, FRONT:</b>	(2) 245/70R19.5 XZE (MICHELIN) 619 rev/mile, load range H, 16 ply
<b>TIRE, REAR:</b>	(4) 245/70R19.5 XZE (MICHELIN) 619 rev/mile, load range H, 16 ply
<b>SUSPENSION, RR, SPRING, SINGLE:</b>	Vari-Rate; 18,500-lb Capacity
<b>PAINT:</b>	Cab schematic 100GA Location 1: 0311, Omaha Orange (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
MH06500	Base Chassis, Model 4300M7 SBA LP 4X2 with 152.00 Wheelbase, 84.90 CA, and 63.00 Axle to Frame.	5880/2415	8295
1CAA	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm) With Transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm) 388.4" (9864mm) Maximum OAL; For LP Chassis	-13/126	113
	<u>Notes</u> : 6.50" Web Height in AF Section		
1LLD	BUMPER, FRONT Full Width, Aerodynamic, Steel; 0.142" Material Thickness	0/0	0
	<u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color		
1WEB	WHEELBASE RANGE 128" (325cm) Through and Including 183" (465cm)	0/0	0
2AEM	AXLE, FRONT NON-DRIVING {Dana Spicer D800-F} I-Beam Type, 8,000-lb Capacity	0/0	0
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
3ADA	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 8,000-lb Capacity; With Shock Absorbers	0/0	0
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4085	BRAKE SYSTEM, HYDRAULIC {Meritor Wabco} Split System, Full Power, With Automatic Adjustment And With Four Channel ABS	0/0	0
4GAR	BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Activated by Lever in Cab; Differential Mounted	0/0	0
	<u>Includes</u> : PARKING BRAKE CONTROL Lever, Floor Mounted, Located Right of Driver		
4JNP	BRAKES, FRONT, HYDRAULIC DISC Quadraulic; four 70mm Diameter Pistons	0/0	0
4NNL	BRAKES, REAR, HYDRAULIC DISC Quadraulic; four 70mm Diameter Pistons	0/0	0
5AAA	STEERING COLUMN Stationary	0/0	0
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black	0/0	0
5PRG	STEERING GEAR {TRW (Ross) TAS-40} Power	0/0	0
7BHU	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Back of Cab; Includes Vertical Tail Pipe & Guard	0/0	0
	<u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : MUFFLER/TAIL PIPE GUARD Non-Bright Finish		
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: BATTERY BOX Steel		
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab		
	: FUSES, ELECTRICAL SAE Blade-Type		
	: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: HORN, ELECTRIC Single		
	: JUMP START STUD Located on Positive Terminal of Outermost Battery		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature		
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	1/0	1
8GDW	ALTERNATOR {Delco Remy 22-SI} Brush Type, 12 Volt 100 Amp. Capacity, Pad Mounted	-5/0	-5
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
8MEZ	BATTERY SYSTEM {International} Maintenance-Free, (2) 12-Volt 1850CCA Total	16/5	21
8RJV	RADIO {International} AM/FM Stereo With Weatherband, Clock, Auxiliary Input, Includes Multiple Speakers	2/0	2
	<u>Includes</u>		
	: SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior		
	: SPEAKERS IN CAB (4) Coaxial with Premium Interior		
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
8WPB	HEADLIGHTS Halogen; Composite Aero Design for Two Light System; Includes Daytime Running Lights	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm	1/0	1
8WYA	STARTING MOTOR {Leece-Neville M101R} 12-Volt; With Integrated Magnetic Switch, less Thermal Over-Crank Protection	1/0	1
8XBK	SWITCH, AUXILIARY Switch 40 amp Circuit for Customer Use; Includes Wiring Connection at PDC and Control in Cab	2/0	2
9HAD	GRILLE Chrome	0/0	0
9WAY	FRONT END Tilting, Fiberglass, With Three Piece Construction	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100  <u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GA"	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
11001	CLUTCH Omit Item (Clutch & Control)	-62/-13	-75
12890	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1000 Watt  <u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door	2/0	2
12NTE	ENGINE, DIESEL {International MaxxFORCE 7} EPA 07, 200 HP @ 2600 RPM, 560 lb-ft Torque @ 1400 RPM, 2800 RPM Governed Speed, 200 Peak HP (Max)  <u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Engine Mounted : FUEL HEATER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Engine Mounted : GLOW PLUG Automatic with Indicator Light : GOVERNOR Electronic : OIL FILTER, ENGINE Drop-In Cartridge Type	0/0	0
12TTB	FAN DRIVE {Borg-Warner Series 790} Viscous Type, Screw On  <u>Includes</u> : FAN Nylon	1/0	1
12UXV	FEDERAL EMISSIONS for 2004; for International VT365, DT466 and DT570 Engines	0/0	0
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, With 313 SqIn Charge Air Cooler. With In-Tank Transmission Cooler  <u>Includes</u> : ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxFORCE Engines : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber	2/0	2
12VBC	AIR CLEANER Single Element  <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted	-4/0	-4
12VXU	THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic, Stationary Pre-Set, Two Speed Settings; Mounted on Steering Wheel	2/0	2
12VYY	FEDERAL EMISSIONS 2007 for International MaxxFORCE 7 Engines (V8)	0/0	0
12VZA	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for MaxxFORCE post 2007 Emissions Electronic Engines	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations	0/0	0
13AHP	TRANSMISSION, AUTOMATIC {Allison 2100_RDS_P} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; With PTO Provision, Less Retarder, With 26,000-lb GVW & GCW Max., on/off hwy  <u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan	36/19	55
14AGE	AXLE, REAR, SINGLE {Dana Spicer 17060S} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 5.57  <u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle  <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance	0/13	13
14SAH	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 18,500-lb Capacity  <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.	0/31	31
14WAP	SHOCK ABSORBERS, REAR (2)	0/47	47
15DMW	FUEL TANK (2) Top Draw; D Style, Non Polished Aluminum, 50 U.S. Gal., Total Capacity 100 U.S. Gal., 378 L; 16" Tank Depth, Mounted Under Cab Left and Right Side	40/16	56
16030	CAB Conventional  <u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door	0/0	0
16HBA	GAUGE CLUSTER English With English Electronic Speedometer  <u>Includes</u> : GAUGE CLUSTER (5) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16HGH	GAUGE, OIL TEMP, ALLISON TRAN	1/0	1
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16JHN	SEAT, DRIVER {Gra-Mag} Non-Suspension, Mid Back, Vinyl, With Fixed Back  <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type	-35/-44	-79
16PHJ	SEAT, TWO-MAN PASSENGER {Gra-Mag} Fixed Back, Two Integral Headrest, Vinyl, Less Under Seat Storage Compartment  <u>Includes</u> : SEAT BELT (2) One 3-Point Shoulder Belt and One 2-Point Lap Belt (Center Position)	41/45	86
16SDJ	MIRRORS (2) {Lang Mekra} Rectangular, 7.44" x 14.84" & 7.44" sq. Convex Both Sides, 102" Inside Spacing, Breakaway Type, Black Heads, Brackets & Arms	2/0	2
16WJS	INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
16WKB	AIR CONDITIONER {International Blend-Air} With Integral Heater & Defroster  <u>Includes</u> : CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : HEATER HOSES Premium : REFRIGERANT Hydrofluorocarbon HFC-134A	0/0	0
16WRX	CAB INTERIOR TRIM Deluxe  <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket : DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors : FLOOR COVERING Rubber, Black : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door : SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console	0/0	0
27DNA	WHEELS, FRONT DISC; 19.5" Painted Steel, 4 Hand Hole, 8-Stud (275 MM BC) Hub Piloted, Flanged Nut, Metric Mount, 6.75 DC Rims; With Steel Hubs  <u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White : WHEEL SEALS, FRONT Grease Lubricated, Includes Wheel Bearings  <u>Notes</u> : Compatible Tire Sizes: 225/70R19.5, 245/70R19.5, 265/70R19.5	0/0	0
28DNA	WHEELS, REAR DUAL DISC; 19.5" Painted Steel, 4 Hand Hole, 8-Stud (275 MM BC) Hub Piloted, Flanged Nut, Metric Mount, 6.75 DC Rims; With Steel Hubs  <u>Includes</u> : PAINT IDENTITY, REAR WHEELS White : WHEEL SEALS, REAR Oil Lubricated, Includes Wheel Bearings	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	<u>Notes</u> : Compatible Tire Sizes: 225/70R19.5, 245/70R19.5, 265/70R19.5		
29580	WHEEL SEALS, FRONT {International} Oil-Lubricated Wheel Bearings	0/0	0
7689453253	(2) TIRE, FRONT 245/70R19.5 XZE (MICHELIN) 619 rev/mile, load range H, 16 ply	-18/0	-18
7689453253	(4) TIRE, REAR 245/70R19.5 XZE (MICHELIN) 619 rev/mile, load range H, 16 ply	0/-36	-36
	<b>Total Component Weight:</b>	<b>5896/2624</b>	<b>8520</b>
	MiDEAL Spec Requirements	0/0	0
	<b>Total Goods Purchased:</b>	<b>0/0</b>	<b>0</b>

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	<u>(USA DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$69,529.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$69,529.00
Total Goods Purchased:		\$1,265.00
Freight Charge	\$1,505.00	
Freight Surcharge	\$250.00	
Total Freight:		\$1,755.00
Total Factory List Price Including Freight:		\$72,549.00
Less Customer Allowance:		(\$21,914.00)
Total Vehicle Price:		\$50,635.00
Total Sale Price:		\$50,635.00
Total Per Vehicle Sales Price:		\$50,635.00
Total Net Sales Excluding Taxes:		\$50,635.00
Michigan Title Fee	\$15.00	
Total License, Title:		\$15.00
Net Sales Price:		\$50,650.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

**Approved by Seller:**

**Accepted by Purchaser:**

\_\_\_\_\_  
**Official Title and Date**

\_\_\_\_\_  
**Firm or Business Name**

\_\_\_\_\_  
**Authorized Signature**

\_\_\_\_\_  
**Authorized Signature and Date**

**This proposal is not binding upon the seller without Seller's Authorized Signature**

\_\_\_\_\_  
**Official Title and Date**