


Prepared For:
STATE OF MICHIGAN
OFFICE OF PURCHASING
DEPT. OF MGT. & BUDGET
LANSING, MI 48909-
(517)373 - 0330
Reference ID: MiDEAL-0164D

MiDEAL 3958-0164D

Presented By:
TRI COUNTY INTL TRUCKS
Mark J Caracciolo
5701 WYOMING St.
DEARBORN MI 48126 -
(313)584-7090

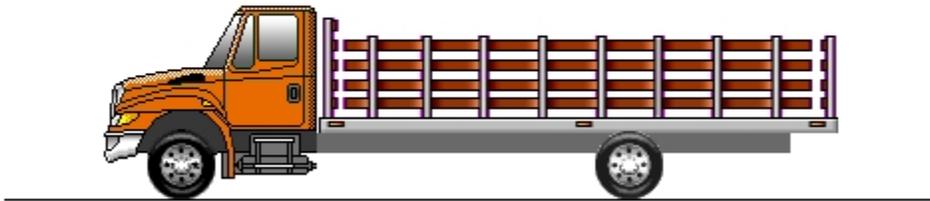

Model Profile
2011 4300M7 SBA 4X2 (MA065)

APPLICATION:	Stake Flat
MISSION:	Requested GVWR: 27000. Calc. GVWR: 27000 Calc. Start / Grade Ability: 27.90% / 2.38% @ 55 MPH Calc. Geared Speed: 70.4 MPH
FUEL ECONOMY:	8.31 MPG @ 55 MPH
DIMENSION:	Wheelbase: 224.00, CA: 156.90, Axle to Frame: 81.00
ENGINE, DIESEL:	{International MaxxForce 7} EPA 07, 215 HP @ 2600 RPM, 560 lb-ft Torque @ 1400 RPM, 2800 RPM Governed Speed, 215 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 2500_RDS_P} 4th Generation Controls; Wide Ratio, 5-Speed, With Overdrive; On/Off Hwy; 33,000 lb GVW & GCW Max., With PTO Provision, Less Retarder
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Dana Spicer D800-F} I-Beam Type, 8,000-lb Capacity
AXLE, REAR, SINGLE:	{Dana Spicer 19060S} Single Reduction, Hypoid Gearing, 19,000-lb Capacity, 190 Wheel Ends Gear Ratio: 6.50
CAB:	Conventional
TIRE, FRONT:	(2) 11R22.5 G287 MSA (GOODYEAR) 498 rev/mile, load range H, 16 ply
TIRE, REAR:	(4) 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range H, 16 ply
SUSPENSION, RR, SPRING, SINGLE:	Vari-Rate; 20,000-lb Capacity, With 4500 lb Auxiliary Rubber Spring
PAINT:	Cab schematic 100GA Location 1: 0311, Omaha Orange (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
MA06500	Base Chassis, Model 4300M7 SBA 4X2 with 224.00 Wheelbase, 156.90 CA, and 81.00 Axle to Frame.	6019/2734	8753
1CAD	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 427.0" (10846mm) Maximum OAL	155/444	599
1LLD	BUMPER, FRONT Full Width, Aerodynamic, Steel; 0.142" Material Thickness <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color	0/0	0
1WEC	WHEELBASE RANGE 185" (470cm) Through and Including 236" (600cm)	0/0	0
2AEM	AXLE, FRONT NON-DRIVING {Dana Spicer D800-F} I-Beam Type, 8,000-lb Capacity <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	0/0	0
3ADA	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 8,000-lb Capacity; With Shock Absorbers <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.	0/0	0
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4 <u>Notes</u> : Front and Rear Dust Shields not Included : Rear Axle is Limited to 19,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Code 04NCL BRAKES, REAR, AIR CAM Regardless of Axle/Suspension Ordered. : Rear Axle is Limited to 20,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Code 04NCG BRAKES, REAR, AIR CAM Regardless of Axle/Suspension Ordered.	94/38	132
4722	DRAIN VALVE {Bendix DV-2} Automatic; With Heater; for Air Tank <u>Includes</u> : DRAIN VALVE Mounted in Wet Tank	1/0	1
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	9/21	30
4EBD	AIR DRYER {Meritor Wabco System Saver 1200} with Heater	16/2	18

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab		
4ESX	BRAKE CHAMBERS, FRONT AXLE {Haldex} 20 SqIn	0/0	0
4EVL	BRAKE CHAMBERS, REAR AXLE {Haldex GC3030LHDHO} 30/30 Spring Brake	0/6	6
	<u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Up To 54,000-lb.		
4JCG	BRAKES, FRONT, AIR CAM S-Cam; 15.0" x 4.0"; Includes 20 Sq. In. Long Stroke Brake Chambers	0/0	0
	<u>Notes</u> : Front Axle with 14,000-lb GAWR is Limited to 13,200-lb GAWR when used in Conjunction with 15" BRAKES, FRONT, AIR CAM. : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake	0/27	27
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity	46/0	46
5708	STEERING COLUMN Tilting	10/0	10
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black	0/0	0
5PRG	STEERING GEAR {TRW (Ross) TAS-40} Power	0/0	0
7BHU	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Back of Cab; Includes Vertical Tail Pipe & Guard	0/0	0
	<u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : MUFFLER/TAIL PIPE GUARD Non-Bright Finish		
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u> : BATTERY BOX Steel : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HORN, ELECTRIC Single : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8540	HORN, ELECTRIC (2)	4/0	4
8GDW	ALTERNATOR {Delco Remy 22-SI} Brush Type, 12 Volt 100 Amp. Capacity, Pad Mounted	-5/0	-5
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2
8MEZ	BATTERY SYSTEM {International} Maintenance-Free, (2) 12-Volt 1850CCA Total	18/3	21
8RJV	RADIO {International} AM/FM Stereo With Weatherband, Clock, Auxiliary Input, Includes Multiple Speakers <u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior	2/0	2
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
8WPB	HEADLIGHTS Halogen; Composite Aero Design for Two Light System; Includes Daytime Running Lights	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm	1/0	1
8WYA	STARTING MOTOR {Leece-Neville M101R} 12-Volt; With Integrated Magnetic Switch, less Thermal Over-Crank Protection	1/0	1
8XBK	SWITCH, AUXILIARY Switch 40 amp Circuit for Customer Use; Includes Wiring Connection at PDC and Control in Cab	2/0	2
9HAD	GRILLE Chrome	0/0	0
9WAY	FRONT END Tilting, Fiberglass, With Three Piece Construction	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100 <u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GA"	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
11001	CLUTCH Omit Item (Clutch & Control)	-66/-9	-75
12890	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1000 Watt <u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door	2/0	2
12NTG	ENGINE, DIESEL {International MaxxFORCE 7} EPA 07, 215 HP @ 2600 RPM, 560 lb-ft Torque @ 1400 RPM, 2800 RPM Governed Speed, 215 Peak HP (Max)	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	<u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Engine Mounted : FUEL HEATER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Engine Mounted : GLOW PLUG Automatic with Indicator Light : GOVERNOR Electronic : OIL FILTER, ENGINE Drop-In Cartridge Type		
12TTB	FAN DRIVE {Borg-Warner Series 790} Viscous Type, Screw On	0/0	0
	<u>Includes</u> : FAN Nylon		
12UXV	FEDERAL EMISSIONS for 2004; for International VT365, DT466 and DT570 Engines	0/0	0
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, With 313 SqIn Charge Air Cooler. With In-Tank Transmission Cooler	2/0	2
	<u>Includes</u> : ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxFace Engines : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		
12VBC	AIR CLEANER Single Element	-4/0	-4
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted		
12VXU	THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic, Stationary Pre-Set, Two Speed Settings; Mounted on Steering Wheel	2/0	2
12VYY	FEDERAL EMISSIONS 2007 for International MaxxFace 7 Engines (V8)	0/0	0
12VZA	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for MaxxFace post 2007 Emissions Electronic Engines	0/0	0
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations	0/0	0
13ALX	TRANSMISSION, AUTOMATIC {Allison 2500_RDS_P} 4th Generation Controls; Wide Ratio, 5-Speed, With Overdrive; On/Off Hwy; 33,000 lb GVW & GCW Max., With PTO Provision, Less Retarder	0/0	0
	<u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan		
14AGA	AXLE, REAR, SINGLE {Dana Spicer 19060S} Single Reduction, Hypoid Gearing, 19,000-lb Capacity, 190 Wheel Ends . Gear Ratio: 6.50	0/13	13
	<u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle		
	<u>Notes</u>		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance		
14VAG	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 20,000-lb Capacity, With 4500 lb Auxiliary Rubber Spring	0/44	44
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.		
14WAP	SHOCK ABSORBERS, REAR (2)	0/45	45
15DMW	FUEL TANK (2) Top Draw; D Style, Non Polished Aluminum, 50 U.S. Gal., Total Capacity 100 U.S. Gal., 378 L; 16" Tank Depth, Mounted Under Cab Left and Right Side	0/0	0
16030	CAB Conventional	0/0	0
	<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door		
16HBA	GAUGE CLUSTER English With English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER (5) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
16HGH	GAUGE, OIL TEMP, ALLISON TRAN	1/0	1
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16JHN	SEAT, DRIVER {Gra-Mag} Non-Suspension, Mid Back, Vinyl, With Fixed Back	-49/-30	-79
	<u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type		
16PHJ	SEAT, TWO-MAN PASSENGER {Gra-Mag} Fixed Back, Two Integral Headrest, Vinyl, Less Under Seat Storage Compartment	56/30	86
	<u>Includes</u> : SEAT BELT (2) One 3-Point Shoulder Belt and One 2-Point Lap Belt (Center Position)		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16SDJ	MIRRORS (2) {Lang Mekra} Rectangular, 7.44" x 14.84" & 7.44" sq. Convex Both Sides, 102" Inside Spacing, Breakaway Type, Black Heads, Brackets & Arms	2/0	2
16WJS	INSTRUMENT PANEL Center Section, Flat Panel	0/0	0
16WKB	AIR CONDITIONER {International Blend-Air} With Integral Heater & Defroster <u>Includes</u> : CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : HEATER HOSES Premium : REFRIGERANT Hydrofluorocarbon HFC-134A	0/0	0
16WRX	CAB INTERIOR TRIM Deluxe <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket : DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors : FLOOR COVERING Rubber, Black : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door : SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console	0/0	0
27DMA	WHEELS, FRONT DISC; 22.5" Painted Steel, 2 Hand Hole, 10 Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs <u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White : WHEEL SEALS, FRONT Grease Lubricated, Includes Wheel Bearings <u>Notes</u> : Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5	91/0	91
28DMA	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 2 Hand Hole, 10-Stub (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs <u>Includes</u> : PAINT IDENTITY, REAR WHEELS White : WHEEL SEALS, REAR Oil Lubricated, Includes Wheel Bearings <u>Notes</u> : Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5	0/67	67
29580	WHEEL SEALS, FRONT {International} Oil-Lubricated Wheel Bearings	0/0	0
7382130121	(4) TIRE, REAR 11R22.5 G182 RSD (GOODYEAR) 496 rev/mile, load range H, 16 ply	0/216	216
7382130125	(2) TIRE, FRONT 11R22.5 G287 MSA (GOODYEAR) 498 rev/mile, load range H, 16 ply	96/0	96
Total Component Weight:		6509/3651	10160

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	MiDEAL Spec Requirements	0/0	0
	Total Goods Purchased:	0/0	0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	(USA DOLLAR)	<u>Price</u>
Factory List Prices:		
Product Items	\$73,901.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$73,901.00
Total Goods Purchased:		\$1,265.00
Freight Charge	\$1,505.00	
Freight Surcharge	\$250.00	
Total Freight:		\$1,755.00
Total Factory List Price Including Freight:		\$76,921.00
Less Customer Allowance:		(\$23,293.00)
Total Vehicle Price:		\$53,628.00
Total Sale Price:		\$53,628.00
Total Per Vehicle Sales Price:		\$53,628.00
Total Net Sales Excluding Taxes:		\$53,628.00
Michigan Title Fee	\$15.00	
Total License, Title:		\$15.00
Net Sales Price:		\$53,643.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date