


Prepared For:
STATE OF MICHIGAN
OFFICE OF PURCHASING
DEPT. OF MGT. & BUDGET
LANSING, MI 48909-
(517)373 - 0330
Reference ID: MiDEAL 0172D

MiDEAL 3958-0172D

Presented By:
TRI COUNTY INTL TRUCKS
Mark J Caracciolo
5701 WYOMING St.
DEARBORN MI 48126 -
(313)584-7090

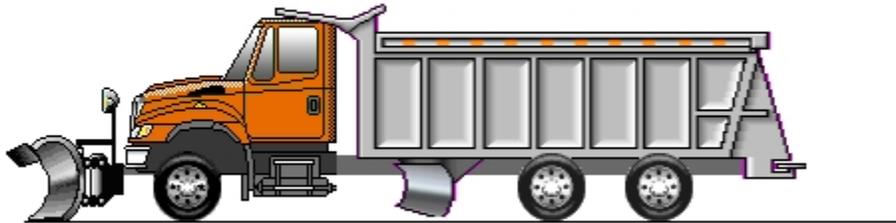

Model Profile
2011 7600 SFA 6X4 2010 (SF567)

APPLICATION:	Front Plow and Underbelly Scraper with Spreader
MISSION:	Requested GVWR: 66000. Calc. GVWR: 64000 Calc. Start / Grade Ability: 31.20% / 2.32% @ 55 MPH Calc. Geared Speed: 67.8 MPH
FUEL ECONOMY:	6.02 MPG @ 55 MPH
DIMENSION:	Wheelbase: 213.00, CA: 129.50, Axle to Frame: 77.00
ENGINE, DIESEL:	{MaxxFace 11} EPA 10, 390 HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500_RDS_P} 4th Generation Controls; Wide Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, With Driver Controlled Main Locking Differential in Rear-Rear Axle and 200 Wheel Ends Gear Ratio: 5.63
CAB:	Conventional
TIRE, FRONT:	(2) 385/65R22.5 G296 MSA (GOODYEAR) 488 rev/mile, load range J, 18 ply
TIRE, REAR:	(8) 11R22.5 UNISTEEL G177 (GOODYEAR) 493 rev/mile, load range H, 16 ply
SUSPENSION, REAR, TANDEM:	{Hendrickson RT-463} Walking Beam Type 54" Axle Spacing; 46,000-lb Capacity With Bronze Center Bushings
PAINT:	Cab schematic 100GR Location 1: 0311, Omaha Orange (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
SF56700	Base Chassis, Model 7600 SFA 6X4 2010 with 213.00 Wheelbase, 129.50 CA, and 77.00 Axle to Frame.	7564/6955	14519
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8
1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	242/398	640
1LNR	BUMPER, FRONT Steel, Swept Back; Painted 0001 Canyon Black	0/0	0
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille	137/-32	105
1WTX	WHEELBASE RANGE 199" (505cm) Through and Including 264" (670cm)	0/0	0
2ARZ	AXLE, FRONT NON-DRIVING {Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity	141/0	141
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
3ADG	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 18,000-lb Capacity; With Shock Absorbers	113/0	113
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4		
	<u>Notes</u> : Rear Axle is Limited to 46,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle /Suspension Ordered.		
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqli Long Stroke Brake Chambers	0/0	0
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.		
4619	TRAILER CONNECTIONS Four-Wheel, With Hand Control Valve and Tractor Protection Valve, for Straight Truck	2/0	2
4722	DRAIN VALVE {Bendix DV-2} Automatic; With Heater; for Air Tank	1/0	1

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	0/0	0
4EBD	AIR DRYER {Meritor Wabco System Saver 1200} with Heater <u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab	12/6	18
4ETE	BRAKE CHAMBERS, FRONT AXLE {Haldex} 24 SqIn	0/0	0
4EVH	BRAKE CHAMBERS, REAR AXLE {MGM TR3030LP3TSHD} 30/30 Spring Brake <u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Up To 54,000-lb. : BRAKE CHAMBERS, SPRING (4) Rear Parking; WITH TRUCK BRAKES: All 6x4, 6x6; WITH TRACTOR BRAKES: 6x4 & 6x6 with Rear Tandem Axles 46,000-lb. or Greater or GVWR of 54,000-lb. or Greater	0/0	0
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	0/0	0
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/0	0
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.	0/0	0
4SPM	AIR COMPRESSOR {Bendix} 15.9 CFM Capacity, Single Cylinder	0/0	0
4VCJ	AIR TANK LOCATION (2) Mounted Under Cab, Outside Left Rail, On Step Bracket, With 24" Ground Clearance	0/0	0
5708	STEERING COLUMN Tilting	10/0	10
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M-100/M-80} Dual Power	50/0	50
6DDC	DRIVESHAFT SYSTEM SPL250XL Driveshaft and SPL170XL Inner-Axle Shaft in lieu of 1810 Driveshaft and 1710 Inner-Axle Shaft	-1/-3	-4
7BEJ	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Outside Right Rail Under Cab; Includes Vertical Tail Pipe and Guard <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : MUFFLER/TAIL PIPE GUARD Non-Bright Finish	0/0	0
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0
7WZY	SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, ON/OFF Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in ON Position	2/0	2
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : BATTERY BOX Steel with Fiberglass Cover	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels : HORN, ELECTRIC Single : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : RUNNING LIGHT (2) Daytime, Included With Headlights : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8540	HORN, ELECTRIC (2)	2/0	2
8695	SNOW SHIELD (2) Chrome; for Dual Air Horns	0/0	0
8GGN	ALTERNATOR {Bosch LH160} Brush Type, 12 Volt 160 Amp. Capacity, Pad Mounted	0/0	0
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	3/0	3
8MKX	BATTERY SYSTEM {International} Maintenance-Free (3) 12-Volt 2775CCA Total	7/1	8
8RGA	2-WAY RADIO Wiring Effects; Wiring With 20 Amp Fuse Protection, Includes Ignition Wire With 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab	1/0	1
8RJV	RADIO {International} AM/FM Stereo With Weatherband, Clock, Auxiliary Input, Includes Multiple Speakers	0/0	0
	<u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior		
8THB	BACK-UP ALARM Electric, 102 dBA	0/3	3
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
8TME	TRAILER CONNECTION SOCKET 7-Way; Mounted at Rear of Frame, Wired for Turn Signals Independent of Stop, Compatible With Trailers That Have Amber or Side Turn Lamps	0/7	7
8VZS	SWITCH, BODY CIRCUITS, MID ; for Bodybuilder, 12 Switches in Instrument Panel, Two Power Modules with 6 Channels, 20 Amp Max. Per Channel, 80 Amp Max Output, Switch Control Power Modules Through Multiplex Wiring, Mounted In Cab Behind Driver	0/0	0
8WEK	BATTERY BOX Steel, With Fiberglass Cover; 35" Back of Cab, Mounted Right Side Perpendicular to Frame Rail	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8WLS	TURN SIGNALS, FRONT Dual Face, Amber/Red, Mounted on Top of Fender, Used With Standard Flush Mounted Front Turn Signal, Side Marker Lamps, Parking Lights and Reflectors	3/0	3
8WML	HEADLIGHTS Long Life Halogen; for Two Light System	0/0	0
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WVP	HORN, AIR (2) Single Tone, Rectangular; Chrome	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	0/0	0
	<u>Notes</u> : This starter is designed to work reliably without the need for thermal overcrank protection and provides the same warranty coverage as starters with thermal overcrank protection.		
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	0/0	0
8XBK	SWITCH, AUXILIARY Switch 40 amp Circuit for Customer Use; Includes Wiring Connection at PDC and Control in Cab	2/0	2
9585	FENDER EXTENSIONS Rubber	0/0	0
9ANG	HOOD, HATCH (01) for Servicing	0/0	0
9HAN	INSULATION, UNDER HOOD for Sound Abatement	0/0	0
9HBM	GRILLE Stationary, Chrome	5/0	5
9WBK	FRONT END Tilting, Fiberglass, With Three Piece Construction Includes Long Hood	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GR"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10WPK	GROUND CLEARANCE IDENTITY For 24" Ground Clearance.	0/0	0
11001	CLUTCH Omit Item (Clutch & Control)	-133/-23	-156
12854	PTO EFFECTS, ENGINE FRONT for MaxxFace 11 and 13 International Engines, Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	0/0	0
12BAT	ENGINE, DIESEL {MaxxFace 11} EPA 10, 390 HP @ 1700 RPM, 1450 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)	0/0	0
	<u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated : COLD STARTING EQUIPMENT Automatic; With Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE BLOCK Compacted Graphite Iron : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Top Access, Cartridge Type Filter Element; Engine Mounted : FUEL SYSTEM High Pressure Common Rail : GOVERNOR Electronic : HEAT MANAGEMENT SYSTEM Eco-Therm : OIL FILTER, ENGINE Drop-In Cartridge Type		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: OIL PAN Laminate Steel Composite : TURBO Twin Series : WET TYPE CYLINDER SLEEVES		
12THJ	FAN DRIVE {Horton Drivemaster} Automatic On/Off Type, With Normally Closed Temperature Control <u>Includes</u> : FAN Nylon	-2/0	-2
12UBL	RADIATOR Aluminum; Welded, Front to Back CrossFlow System, 1593 SqIn, 1929 SqIn Dual CAC, 1548 SqIn 3 Core LTR <u>Includes</u> : ANTI-FREEZE Yellow Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxFace 2010 Engines : DEAERATION SYSTEM with Clear Fill/Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber	0/0	0
12UXJ	FEDERAL EMISSIONS for 2010; MaxxFace 11 Engines	0/0	0
12VAL	AIR CLEANER Dual Element, with Integral Snow Valve and In-Cab Control <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted	10/0	10
12WCT	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1500 Watt With "Y" Cord for Fuel Heater; Cord to Operate Both Heaters <u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door	3/0	3
12WEG	COLD STARTING EQUIPMENT Automatic; With Engine ECM Control	4/0	4
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	15/0	15
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations	0/0	0
13AMN	TRANSMISSION, AUTOMATIC {Allison 4500_RDS_P} 4th Generation Controls; Wide Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder <u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan	0/0	0
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil, for Allison or CEEMAT Transmission	25/0	25
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission	0/0	0
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction	0/0	0
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
13WYL	SHIFT CONTROL PARAMETERS Allison Performance Programming in Primary and Allison Economy Programming in Secondary	0/0	0
14GRP	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, With Driver Controlled Main Locking Differential in Rear-Rear Axle and 200 Wheel Ends . Gear Ratio: 5.63 <u>Includes</u> : POWER DIVIDER LOCK Electric over Air Operated, Cab Control with Indicator Light : REAR AXLE DRAIN PLUG (2) Magnetic, For Tandem Rear Axle <u>Notes</u> : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance	0/444	444
14UHK	SUSPENSION, REAR, TANDEM {Hendrickson RT-463} Walking Beam Type 54" Axle Spacing; 46,000-lb Capacity With Bronze Center Bushings <u>Includes</u> : CROSSMEMBER, SUSPENSION Stamped Steel Double Dogbone <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.	0/801	801
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles With Bar-Pin Beam Attachment Type Suspensions	0/0	0
14WLE	AXLE, REAR, LUBE {EmGard 75W-90} Synthetic Oil; 65 thru 89.99 Pints	0/0	0
15LKY	FUEL/WATER SEPARATOR {Davco Fuel Pro 382} 120 Volt Pre Heater and Fuel Heated, Thermostatic Fuel Temperature Control, Includes Water-In-Fuel Light, Mounted In Standard Position	3/-2	1
15SSC	FUEL TANK Temporary; Top Draw; D-Style, Non Polished Aluminum, 16" Tank Depth, 50 U.S. Gal., 189 L Capacity, With Quick Connect Outlet, Mounted Left Side Back of Cab	0/0	0
16030	CAB Conventional <u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door	0/0	0
16HBA	GAUGE CLUSTER English With English Electronic Speedometer <u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)		
16HGH	GAUGE, OIL TEMP, ALLISON TRAN	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, With 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust <u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type	0/0	0
16RPV	SEAT, PASSENGER {National 2000} Air Suspension, High Back With Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust	58/22	80
16SDU	MIRRORS (2) {Lang Mekra} Styled; Rectangular, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing, Breakaway Type, Heated Heads Thermostatically Controlled, Power Both Sides, Clearance Lights LED, Bright Finish Heads & Brackets	9/0	9
16SEE	GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar	3/0	3
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16WBZ	ARM REST, LEFT, PASSENGER SEAT	3/0	3
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster <u>Includes</u> : CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : HEATER HOSES Premium : REFRIGERANT Hydrofluorocarbon HFC-134A	0/0	0
16WJT	INSTRUMENT PANEL Center Section, Ergonomic Panel	0/0	0
16WJU	WINDOW, POWER (2) And Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5
16WKY	FRESH AIR FILTER for HVAC	4/0	4
16WLE	STORAGE POCKET, DOOR Molded Plastic, Full Width; Mounted on Passenger Door	0/0	0
16WRZ	CAB INTERIOR TRIM Premium <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator, Premium Floormat, and Sound Dampening Patches	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side		
	: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights		
	: COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side		
	: DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors		
	: FLOOR COVERING Rubber, Black		
	: GAUGE, TEMPERATURE, AMBIENT Includes Compass Readout and Wiring and Sensor With Display Unit Mounted in Cluster		
	: HEADLINER Soft Padded Cloth		
	: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section		
	: STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors		
	: SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side		
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
27DNP	WHEELS, FRONT DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hole, Flanged Nut, Metric Mount, 12.25 DC Rims; With Steel Hubs, with 5.375" Offset	130/0	130
	<u>Includes</u>		
	: PAINT IDENTITY, FRONT WHEELS White		
	: WHEEL SEALS, FRONT Oil Lubricated, Includes Wheel Bearings		
	<u>Notes</u>		
	: Compatible Tire Sizes: 385/65R22.5, 425/65R22.5		
28DMA	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 2 Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs	0/0	0
	<u>Includes</u>		
	: PAINT IDENTITY, REAR WHEELS White		
	: WHEEL SEALS, REAR Oil Lubricated, Includes Wheel Bearings		
	<u>Notes</u>		
	: Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5		
29WLA	WHEEL BEARING, FRONT, LUBE {EmGard 50W} Synthetic Oil	0/0	0
7382130162	(8) TIRE, REAR 11R22.5 UNISTEEL G177 (GOODYEAR) 493 rev/mile, load range H, 16 ply	0/216	216
7702658113	(2) TIRE, FRONT 385/65R22.5 G296 MSA (GOODYEAR) 488 rev/mile, load range J, 18 ply	96/0	96
	Total Component Weight:	8546/8793	17339
	MiDEAL Spec Requirements	0/0	0
	Total Goods Purchased:	0/0	0

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

<u>Description</u>	<u>(USA DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$183,924.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$183,924.00
Total Goods Purchased:		\$1,265.00
Freight Charge	\$1,505.00	
Freight Surcharge	\$250.00	
Total Freight:		\$1,755.00
Total Factory List Price Including Freight:		\$186,944.00
Less Customer Allowance:		(\$73,284.00)
Total Vehicle Price:		\$113,660.00
Total Sale Price:		\$113,660.00
Total Per Vehicle Sales Price:		\$113,660.00
Total Net Sales Excluding Taxes:		\$113,660.00
Michigan Title Fee	\$15.00	
Total License, Title:		\$15.00
Net Sales Price:		\$113,675.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date