

2012-2013

MICHIGAN DEPARTMENT OF TRANSPORTATION



Congestion & Mobility Report

Freeway Performance Measures

Chapter 3

GRAND REGION SUMMARY



Congestion & Mobility Report

Freeway Performance Measures

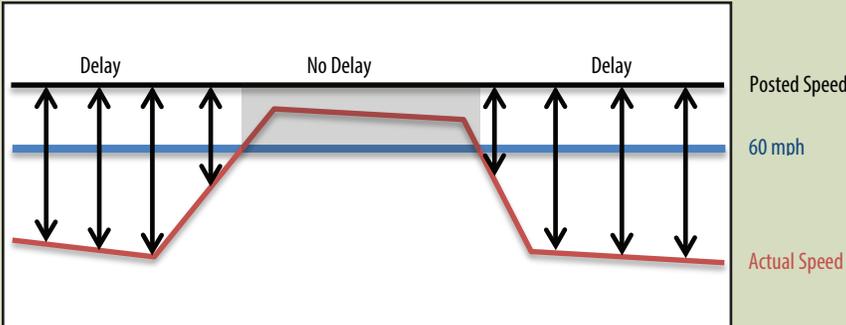


Figure 1.....	4
Figure 2.....	5
Figure 3.....	6
Figure 4.....	7
Figure 5.....	8
Figure 6.....	9
Figure 7.....	10
Figure 8.....	11
Figure 9.....	12
Figure 10.....	13
Figure 11.....	14
Figure 12.....	15
Figure 13.....	16
Figure 14.....	17
Figure 15.....	18
Figure 16.....	19
Figure 17.....	20
Figure 18.....	21
Figure 19.....	22
Figure 20.....	23
Figure 21.....	24
Figure 22.....	25
Figure 23.....	26
Figure 24.....	27
Figure 25.....	28
Figure 26.....	29
Figure 27.....	30
Figure 28.....	31
Figure 29.....	32
Figure 30.....	33
Figure 31.....	34
Figure 32.....	35
Figure 33.....	36
Figure 34.....	37
Figure 35.....	38
Figure 36.....	39
Figure 37.....	40
Figure 38.....	41
Figure 39.....	42

PERFORMANCE MEASURE DEFINITIONS

Total Delay

Delay is calculated by taking the difference between actual speeds when they fall below 60 mph and the posted speed limit for freeways posted at 70 mph. This is to take out the delay caused by the lower average speeds from commercial vehicles.



Total Delay per Mile

Delay per mile is calculated by taking the total delay and dividing it by the length of the freeway. This was performed for each route in each TSC.

Congestion

Congestion is calculated as the number of hours below 45 mph per Traffic Message Channel (TMC). A TMC is a standard for delivering real-time traffic information. They vary from tenths of a mile long to several miles long.

Non-Recurring/Recurring Delay

Non-recurring delay is calculated by taking the difference between the actual speed (any time the speed falls below 60 mph) and the average speed. Recurring is measured by taking the difference of the total delay and non-recurring delay.

Weighted Congestion

Number of congestion hours multiplied by the segment length. Congestion along longer segments will get more consideration than congestion along shorter segments.

User Delay Cost

User Delay Costs (UDC) is calculated by multiplying delay x hourly volume x hourly user cost. Delay is calculated by taking the difference between actual speeds when they fall below 60 mph and the posted speed limit. Hourly volumes are derived from Average Daily Traffic (ADT) and Commercial Average Daily Traffic (CADT). Hourly user costs are based on Federal Highway Administration (FHWA) publication number FHWA-SA-98-079, "Life-Cycle Cost Analysis in Pavement Design."

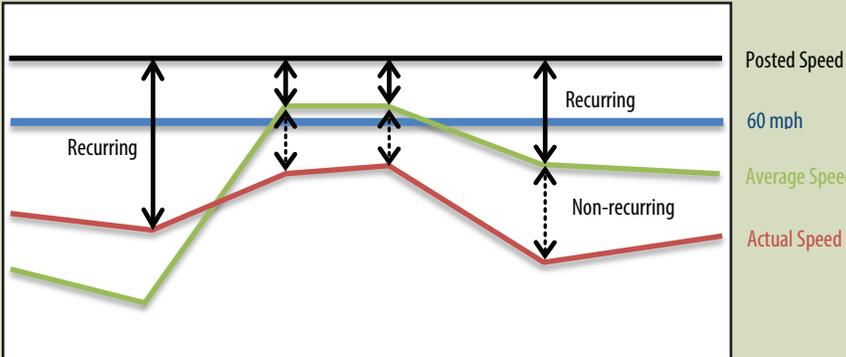


Figure 1

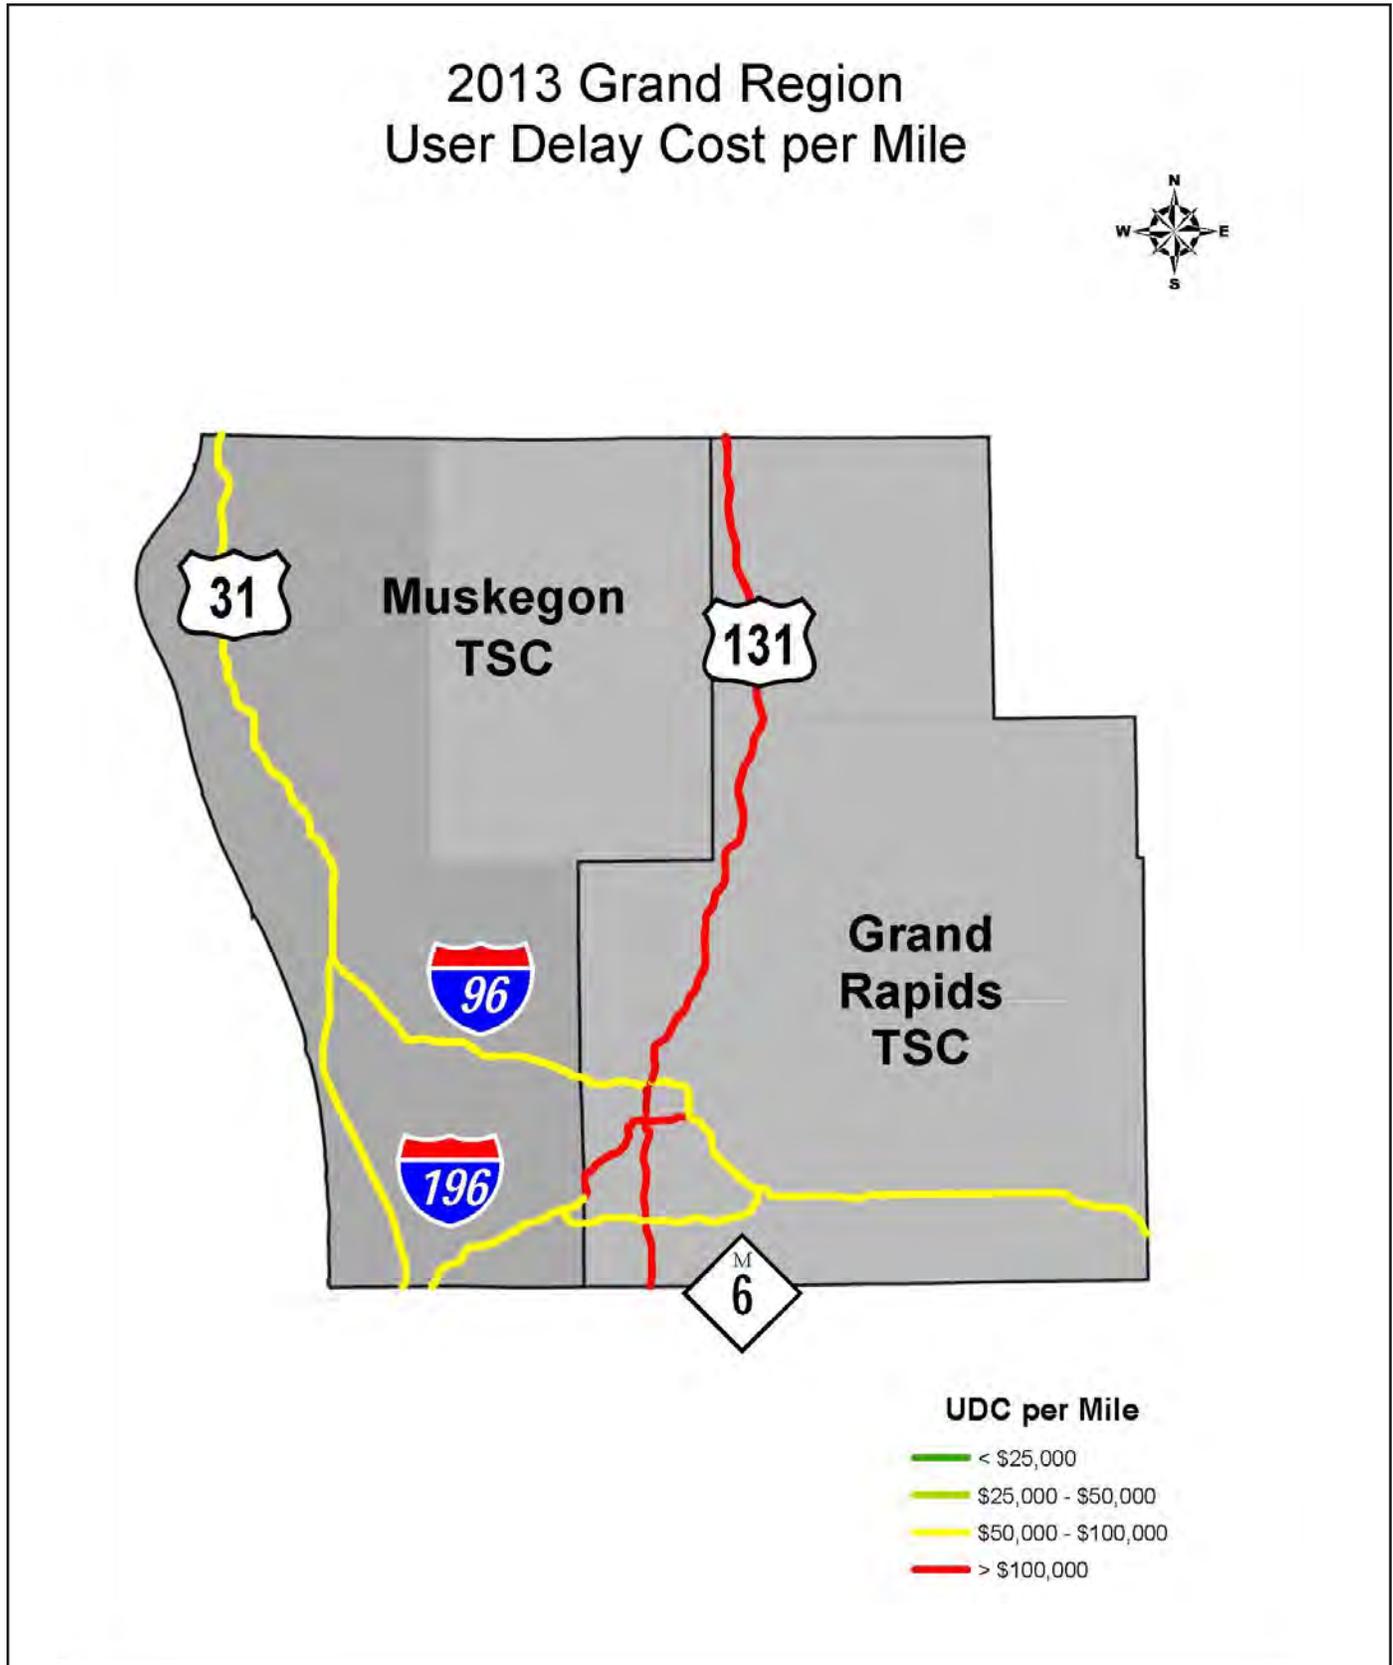


Figure 2



Figure 3



Figure 4

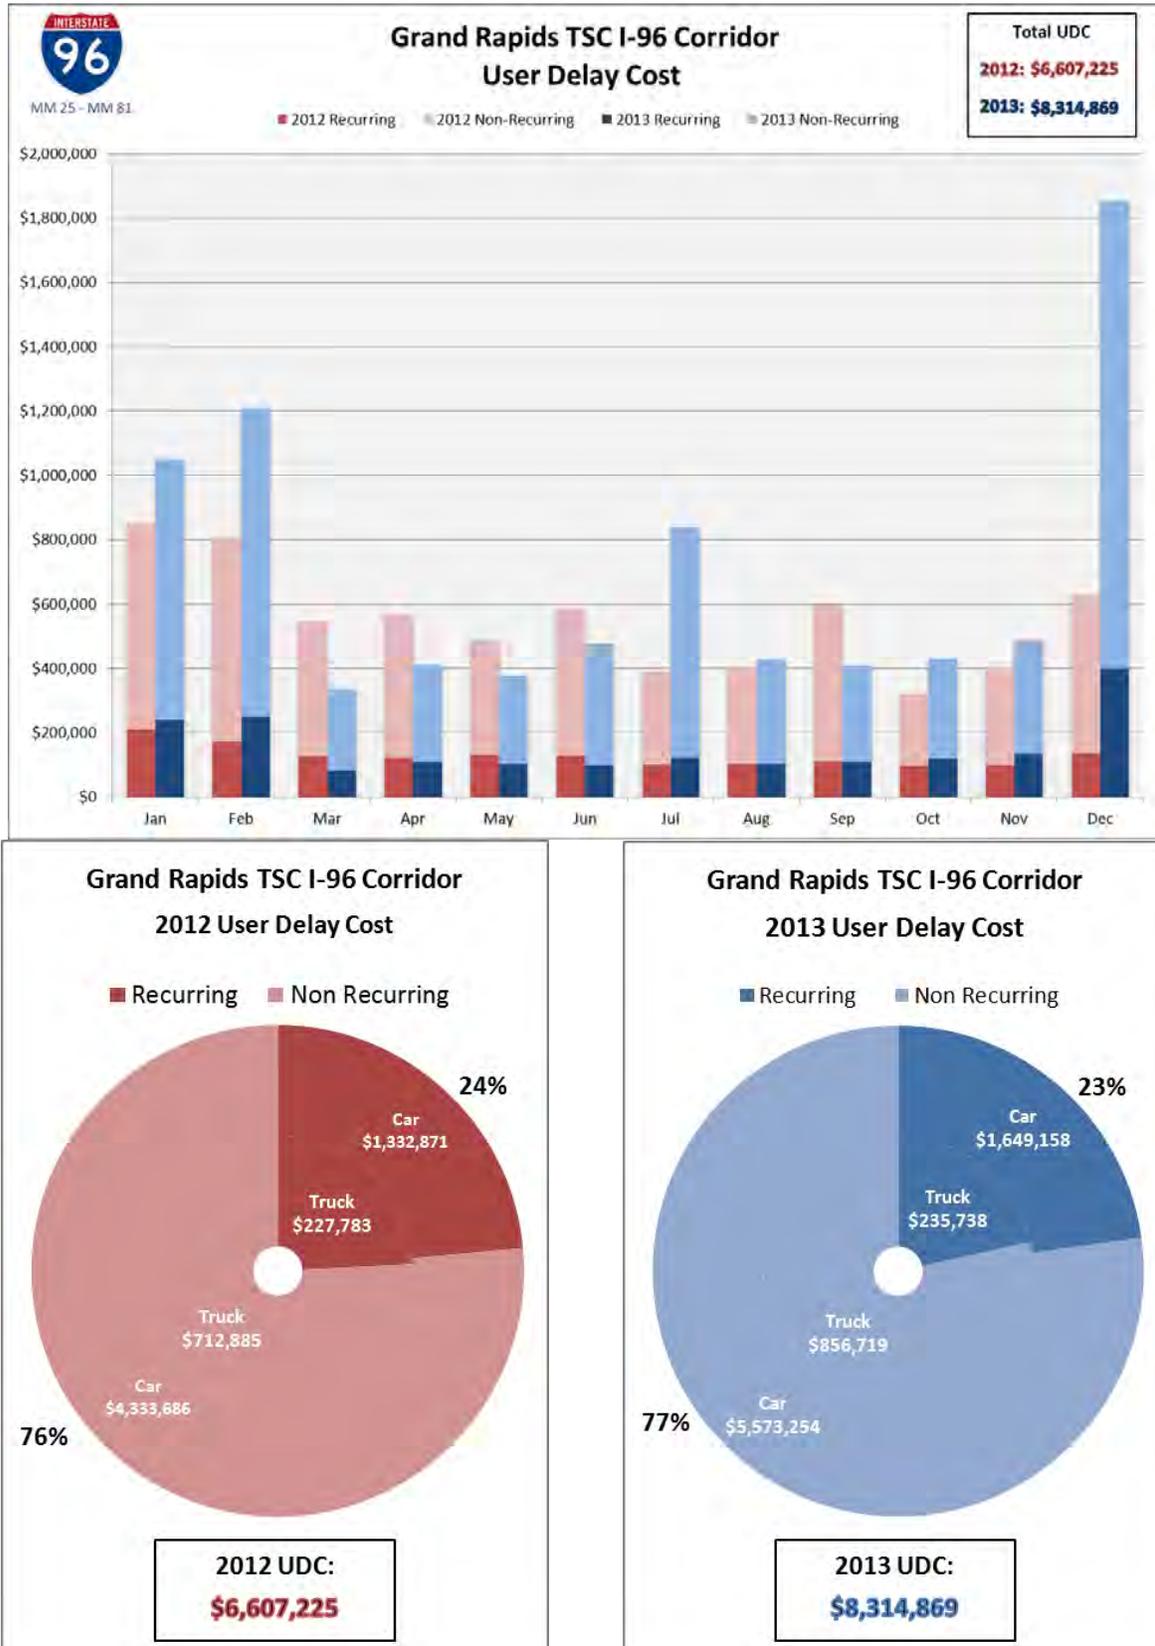


Figure 5

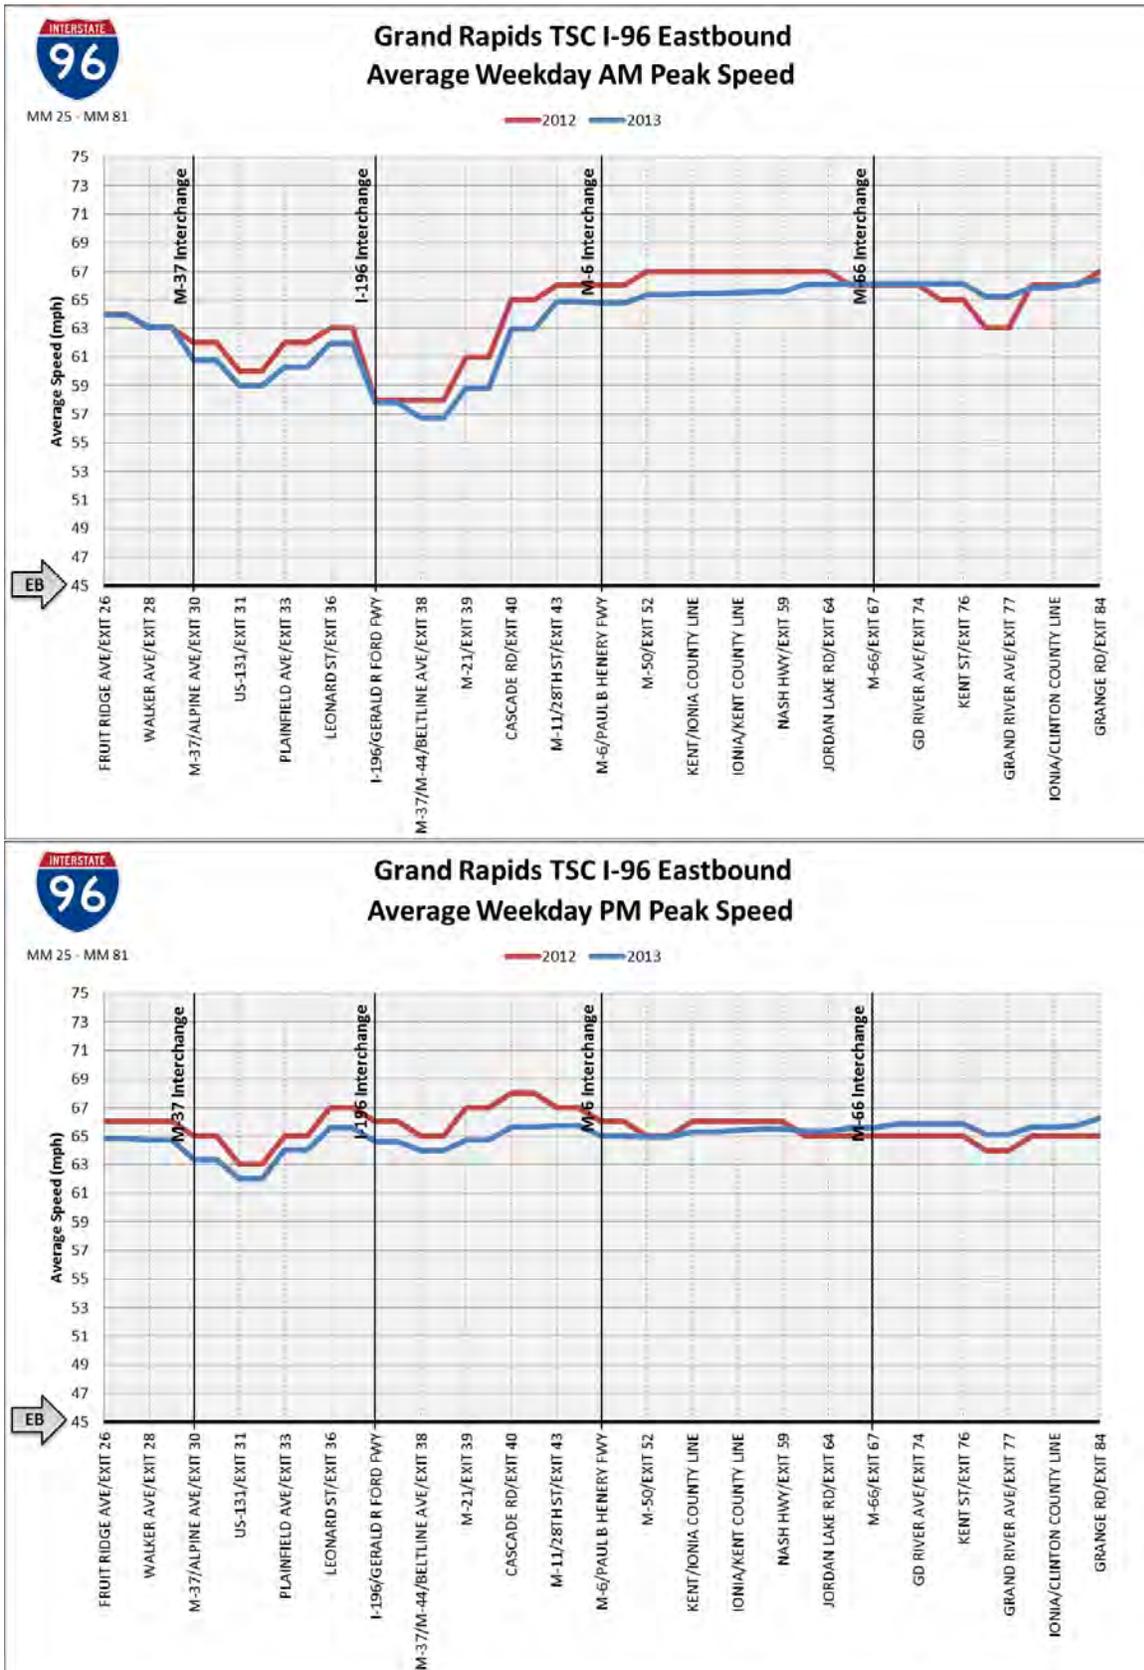


Figure 6

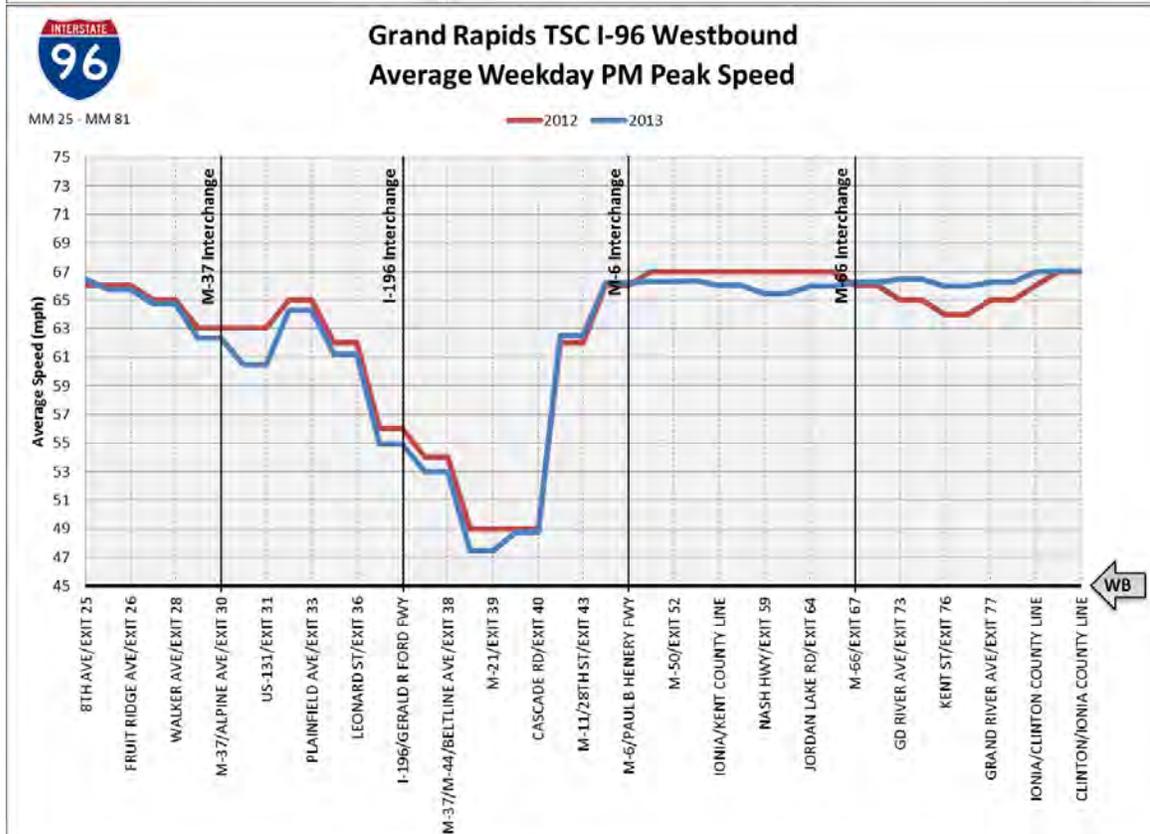
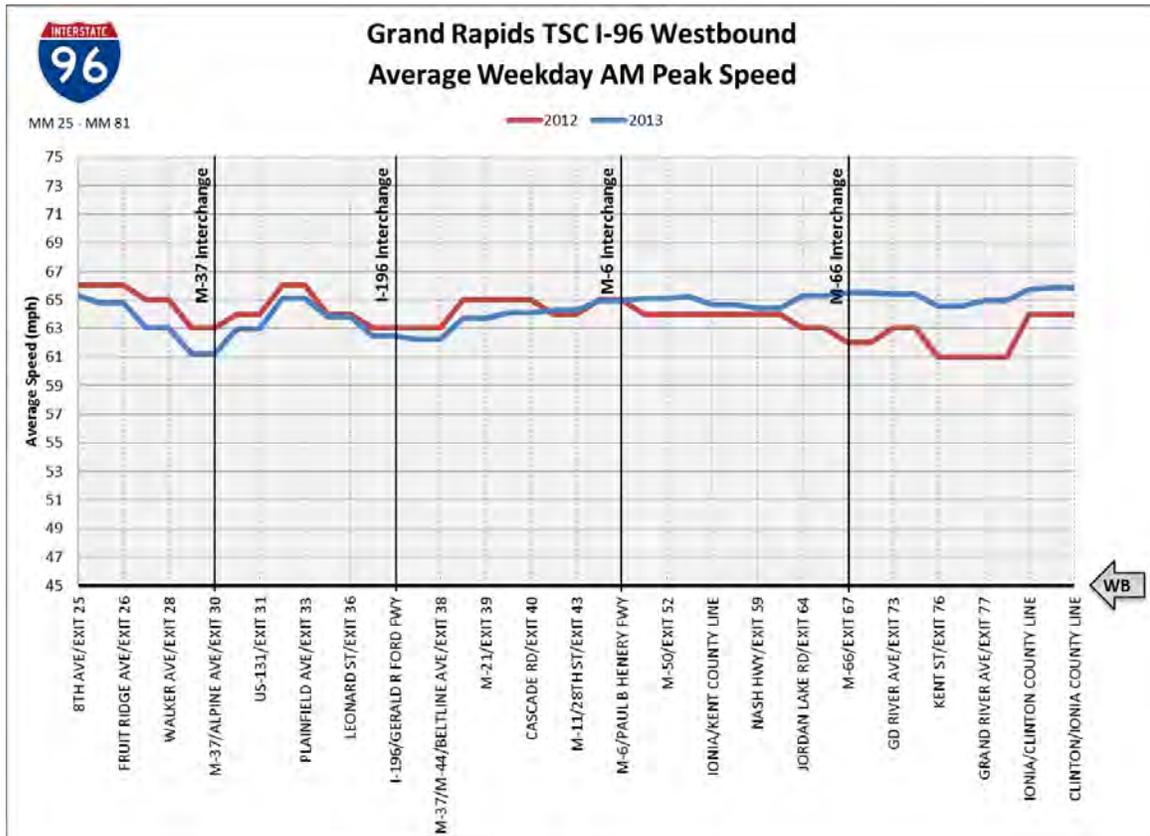


Figure 7

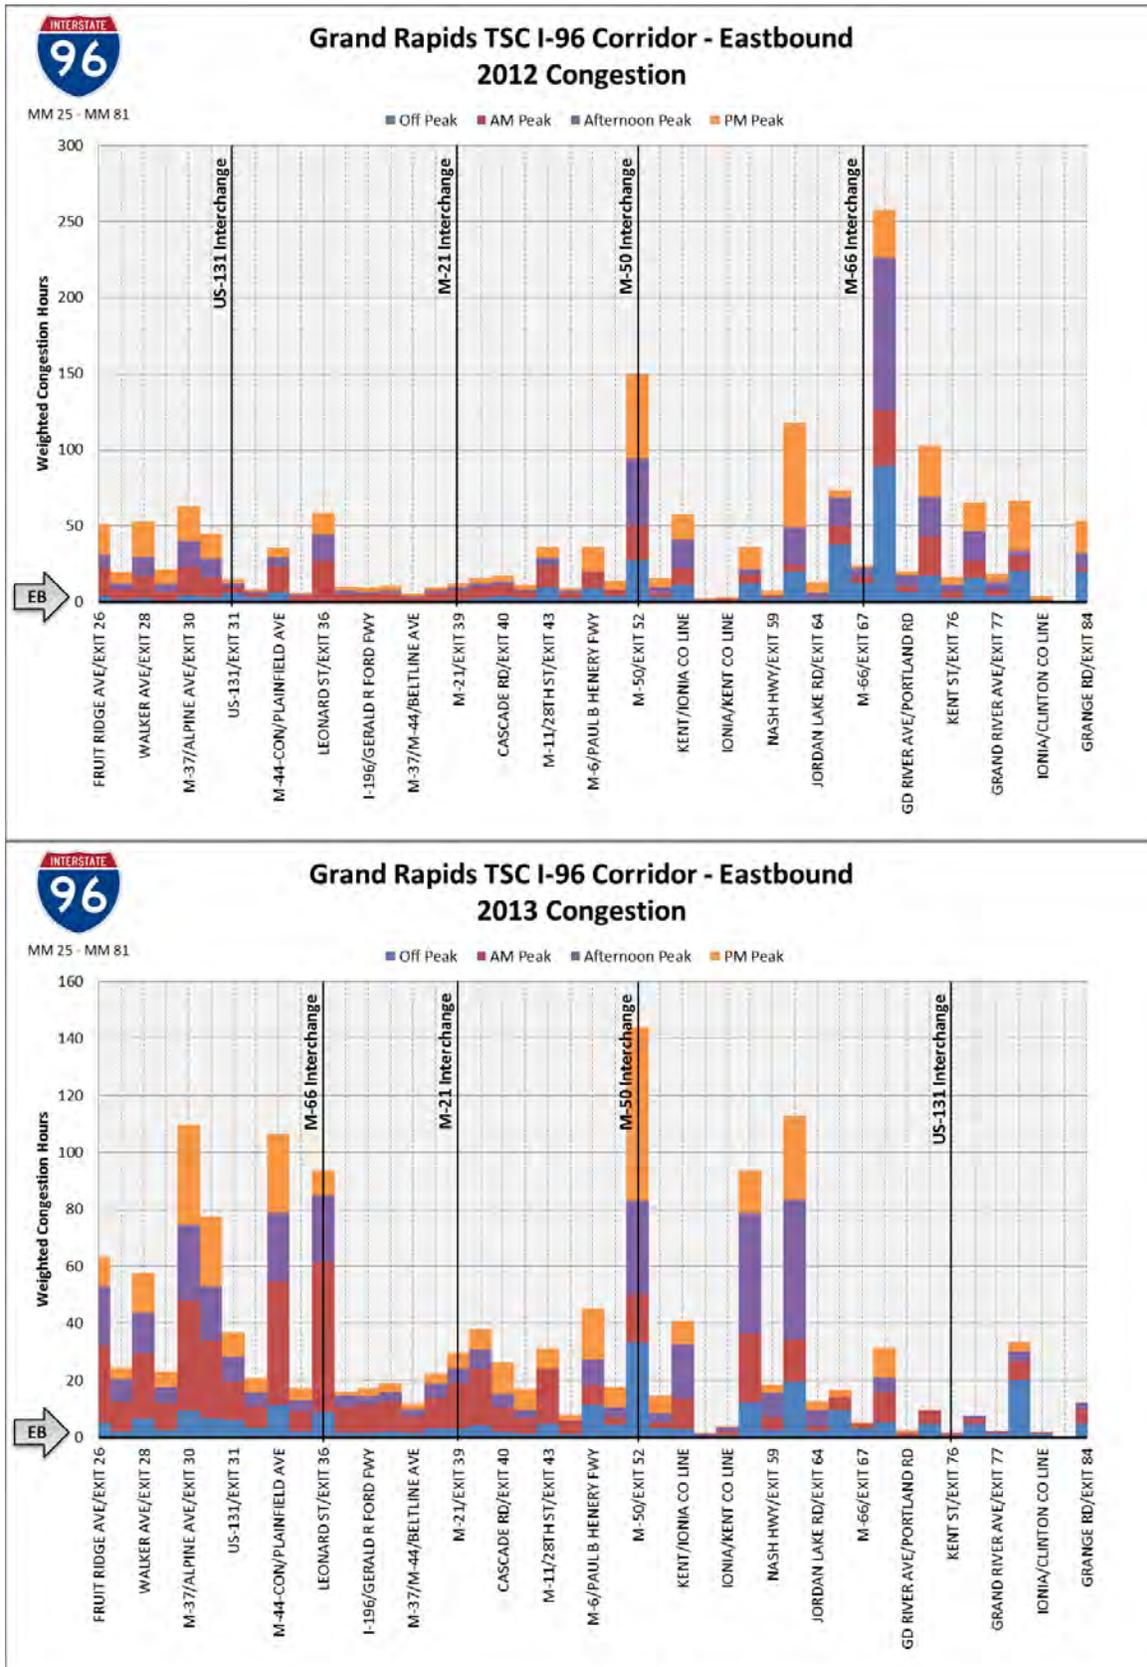


Figure 8

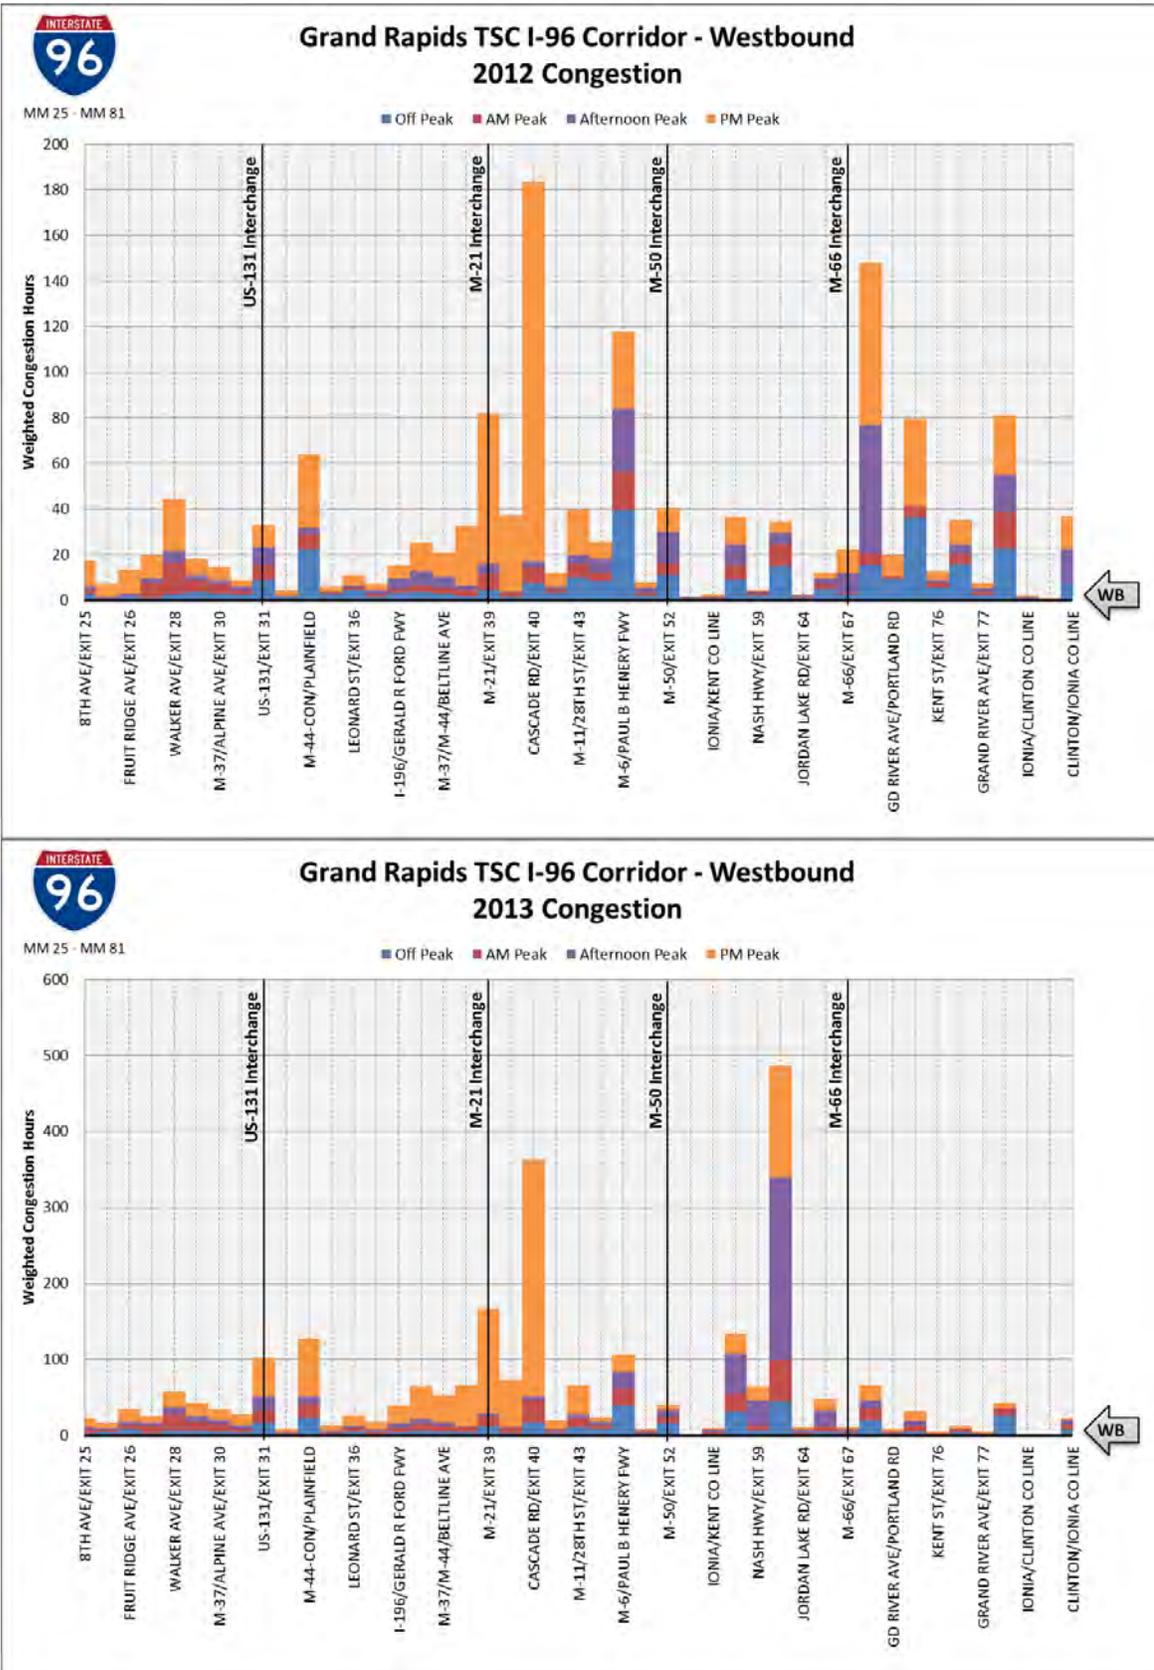


Figure 9

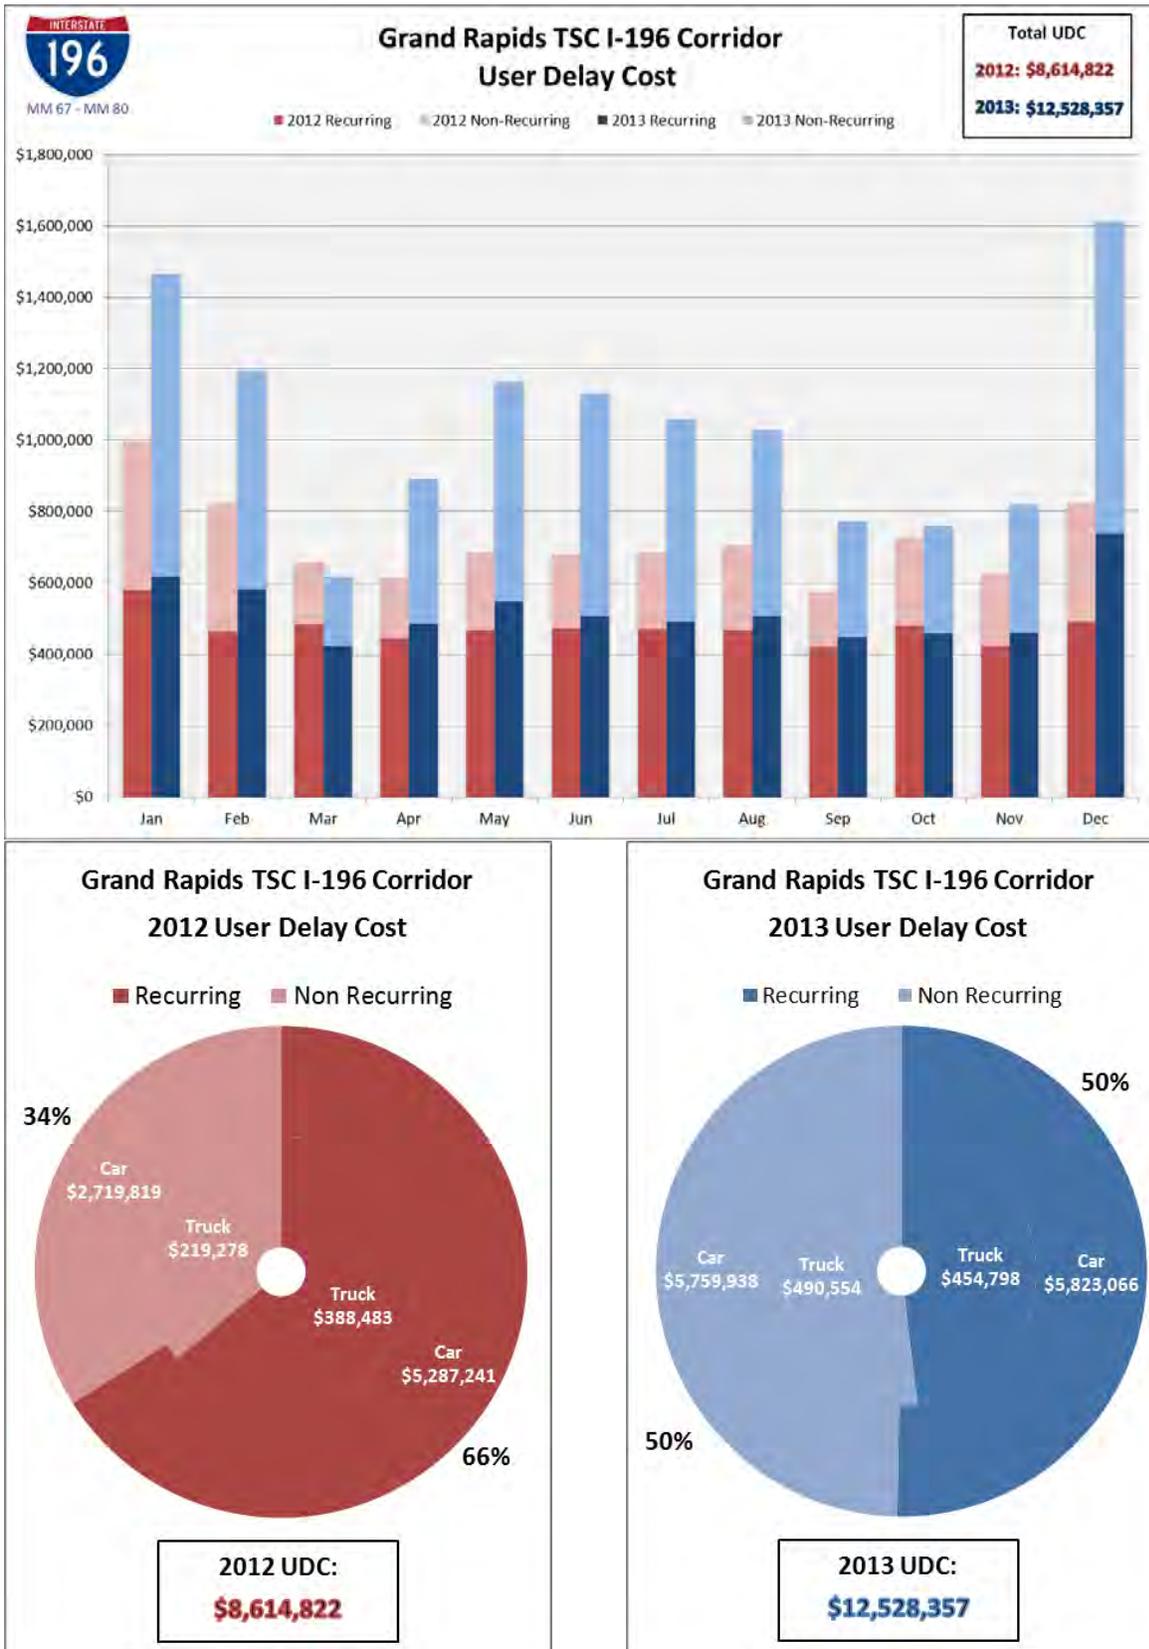


Figure 10

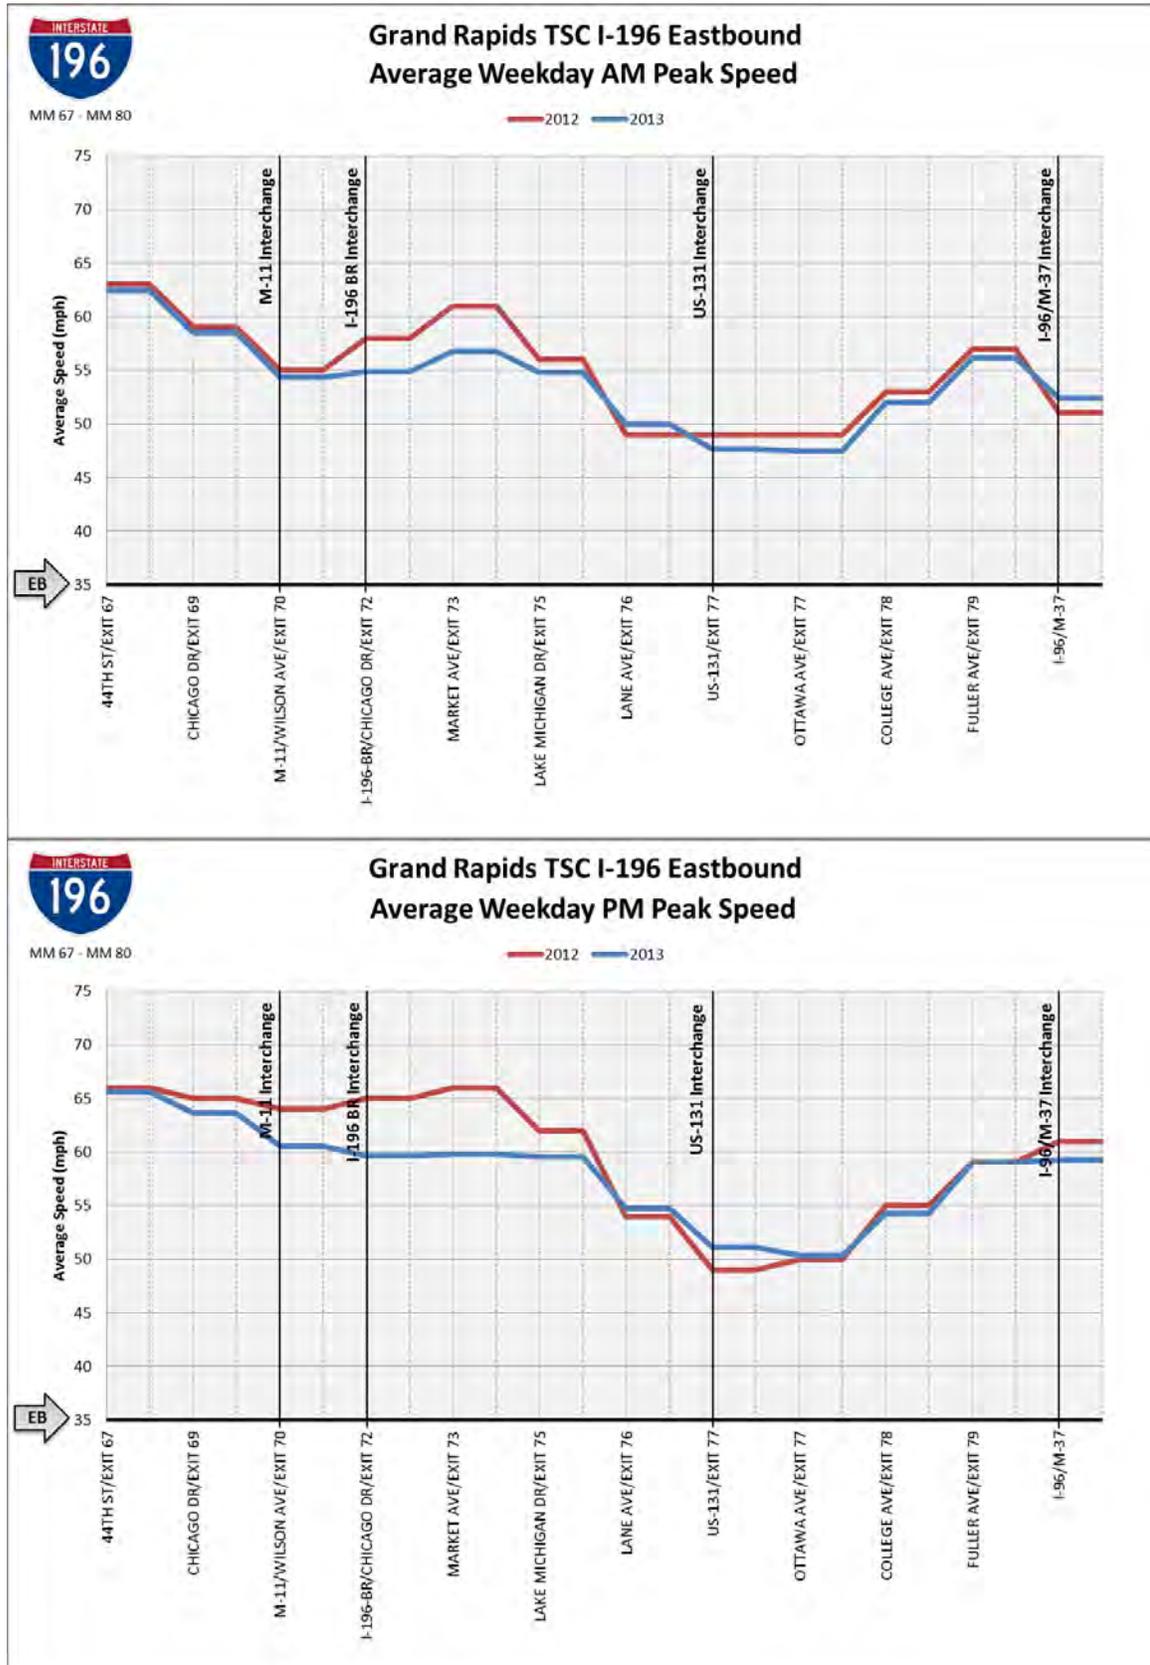


Figure 11

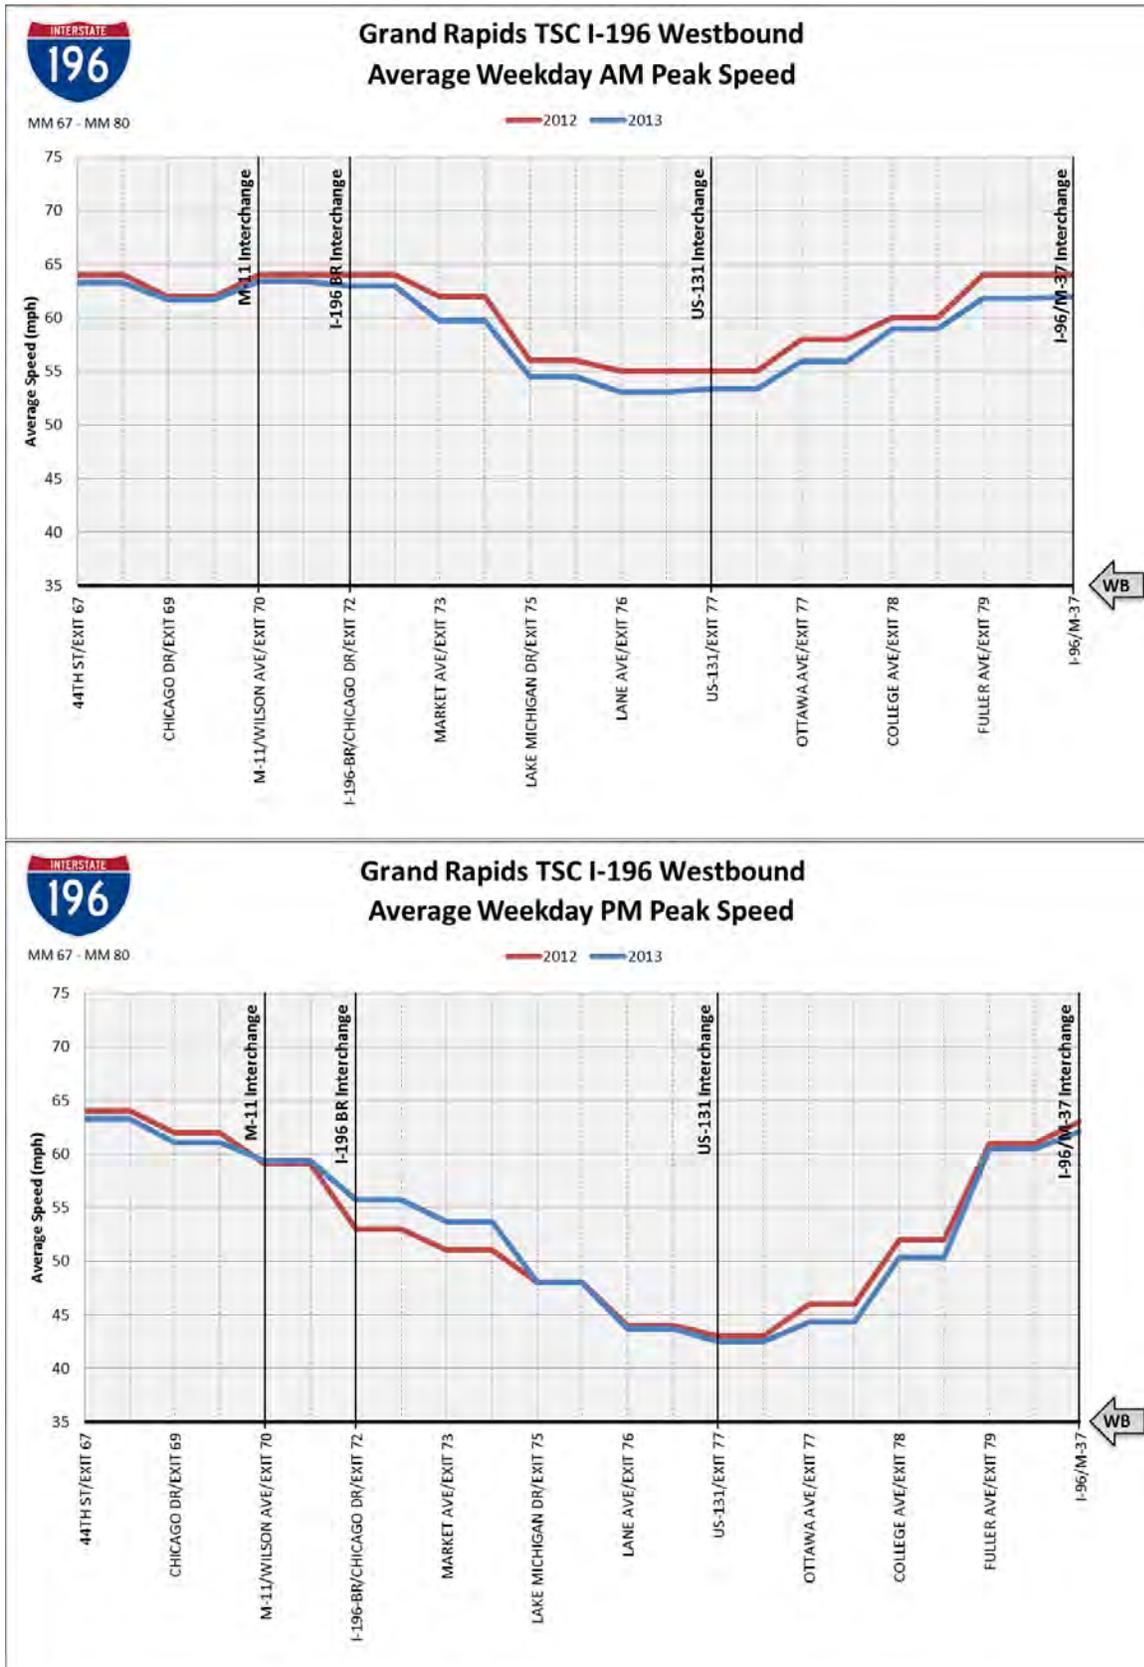


Figure 12

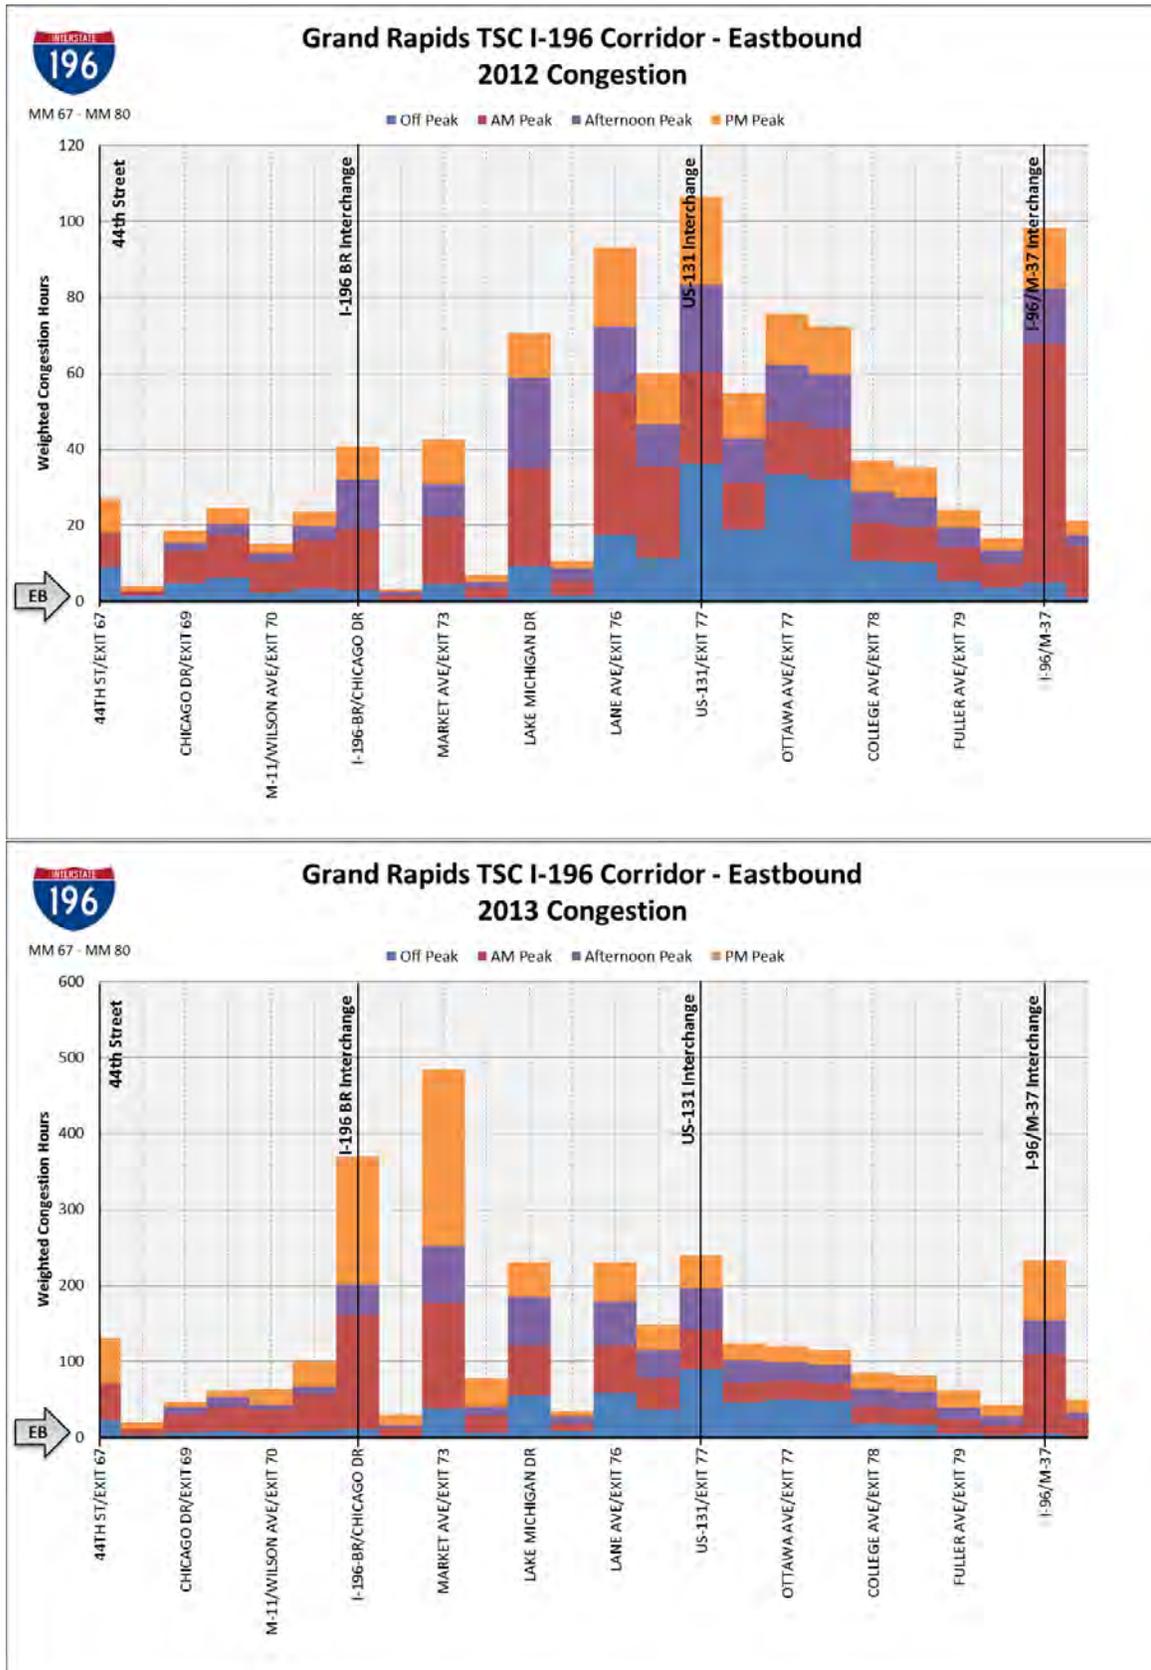


Figure 13

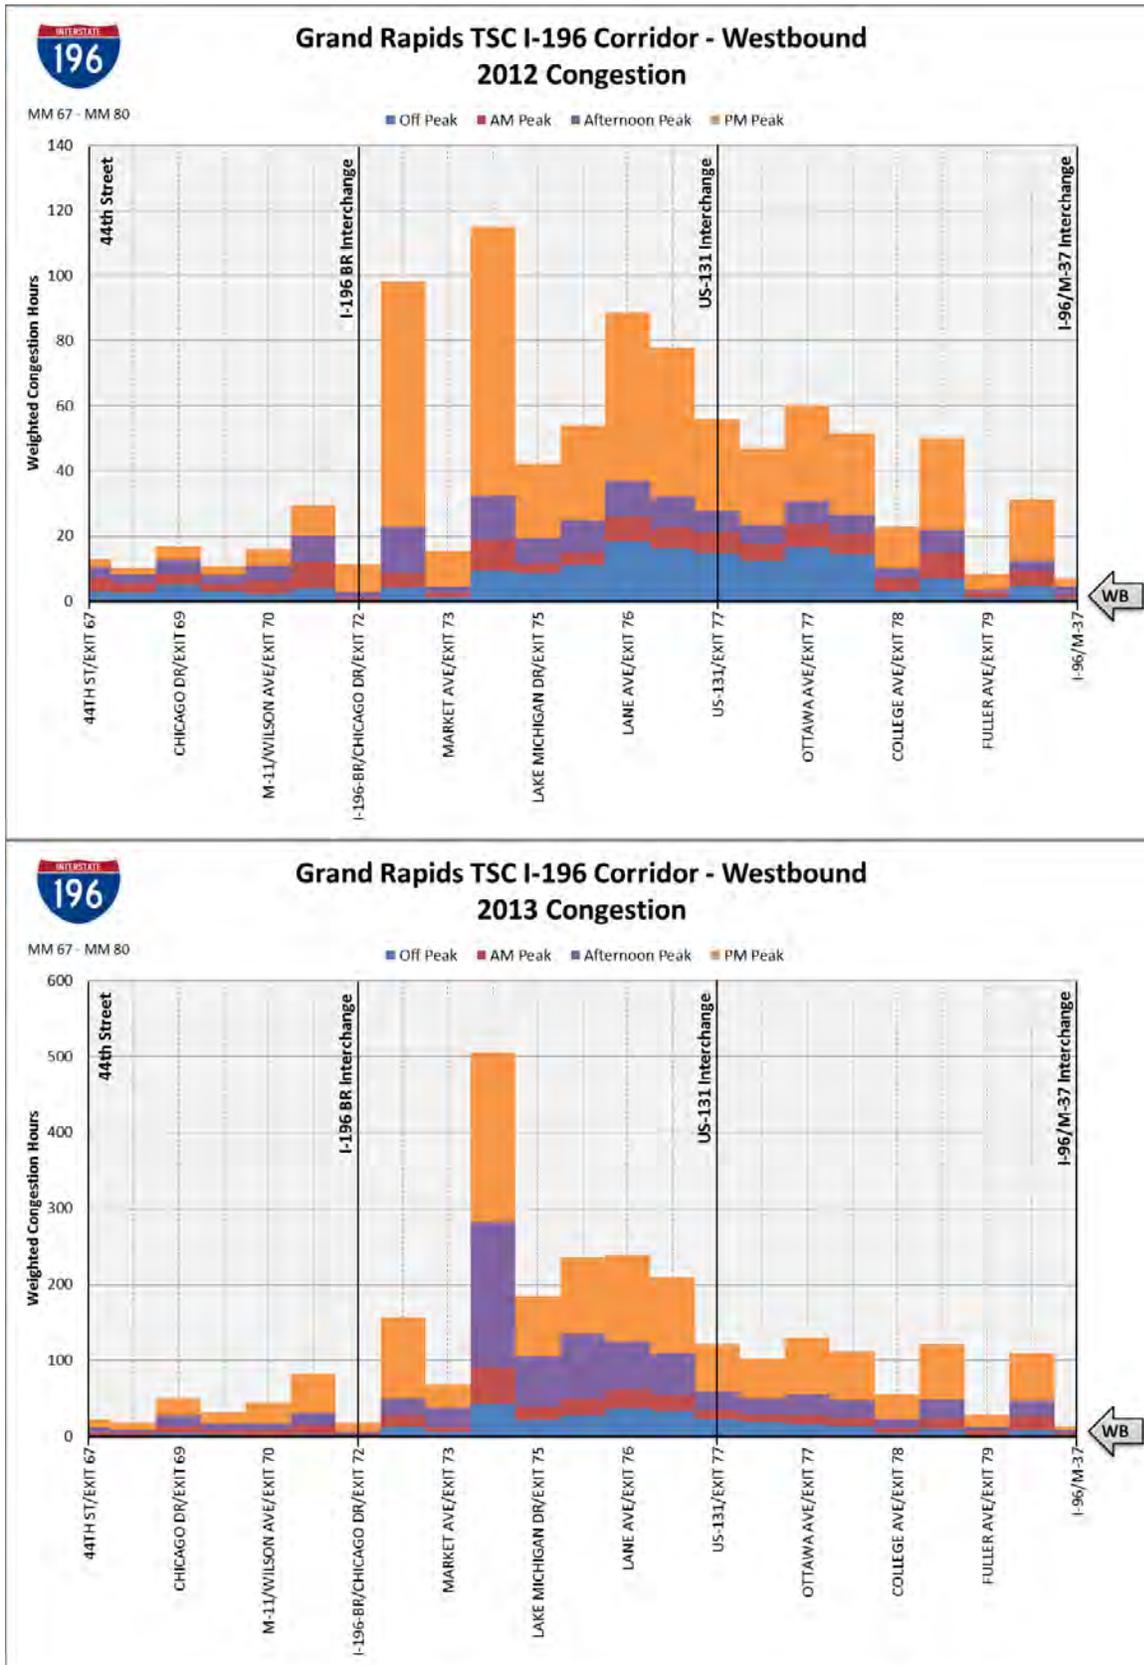


Figure 14

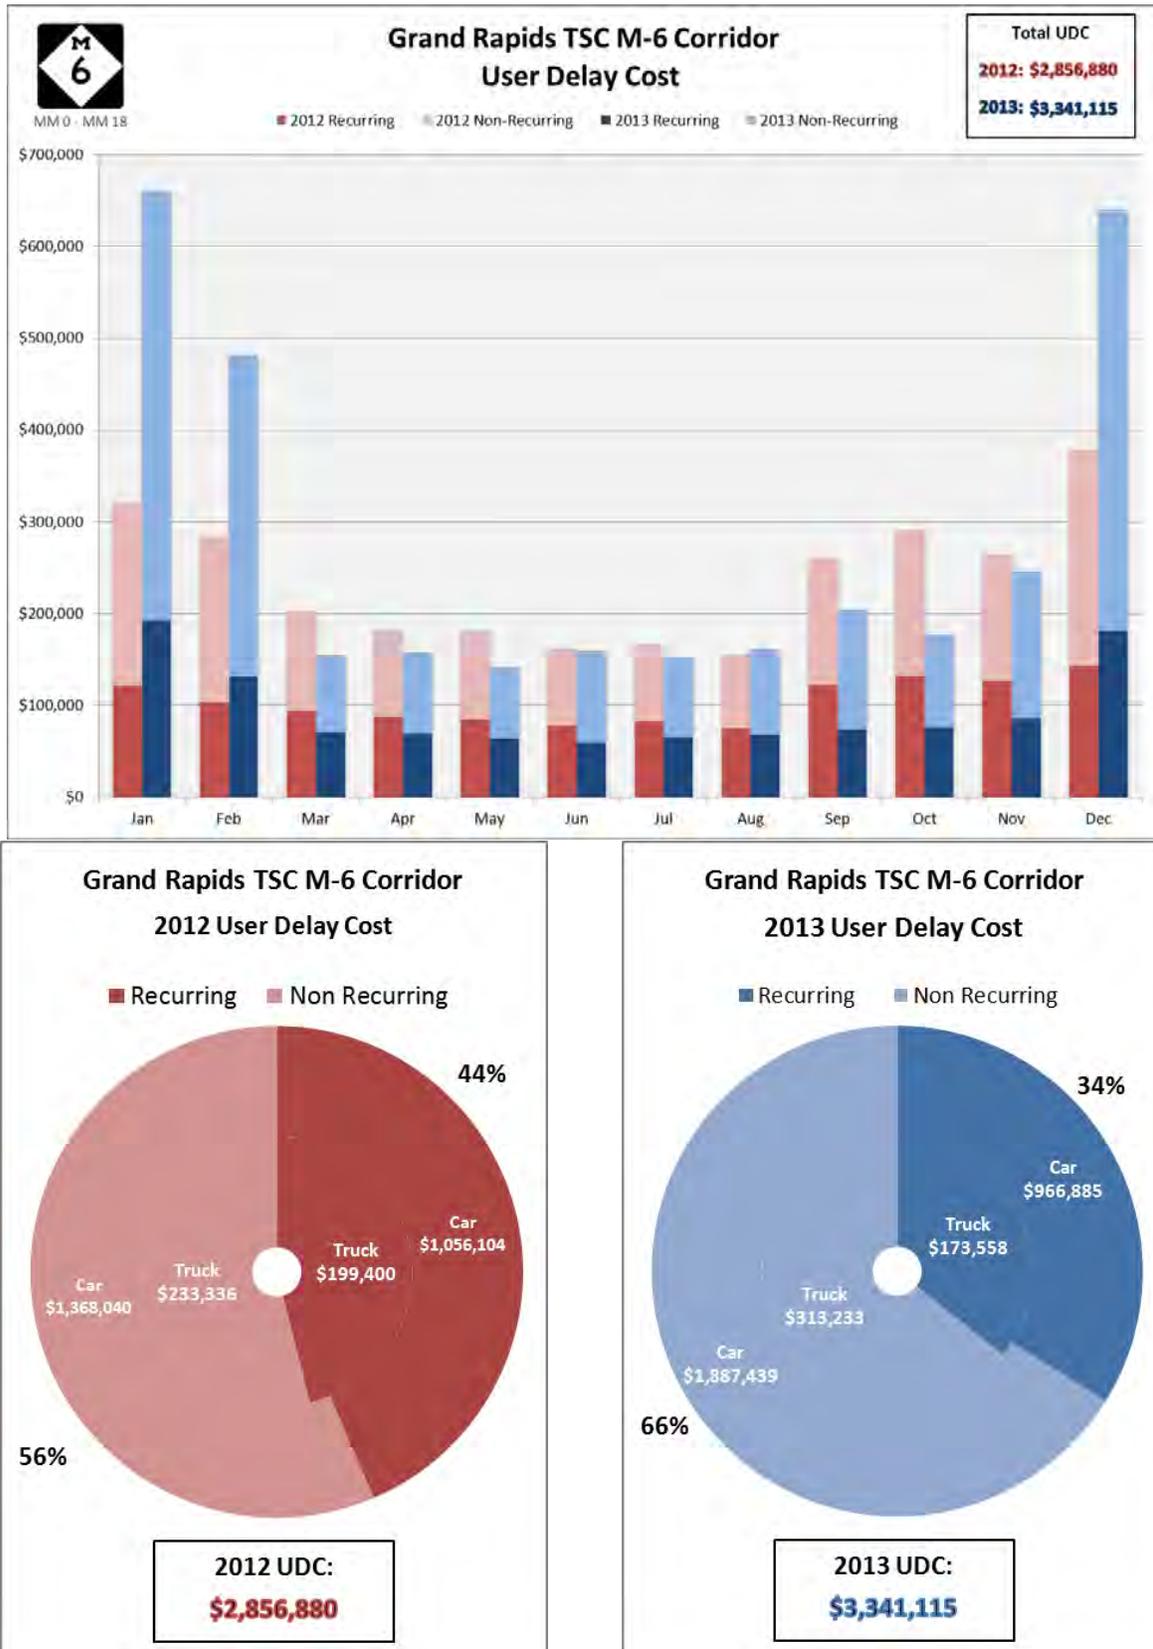


Figure 15

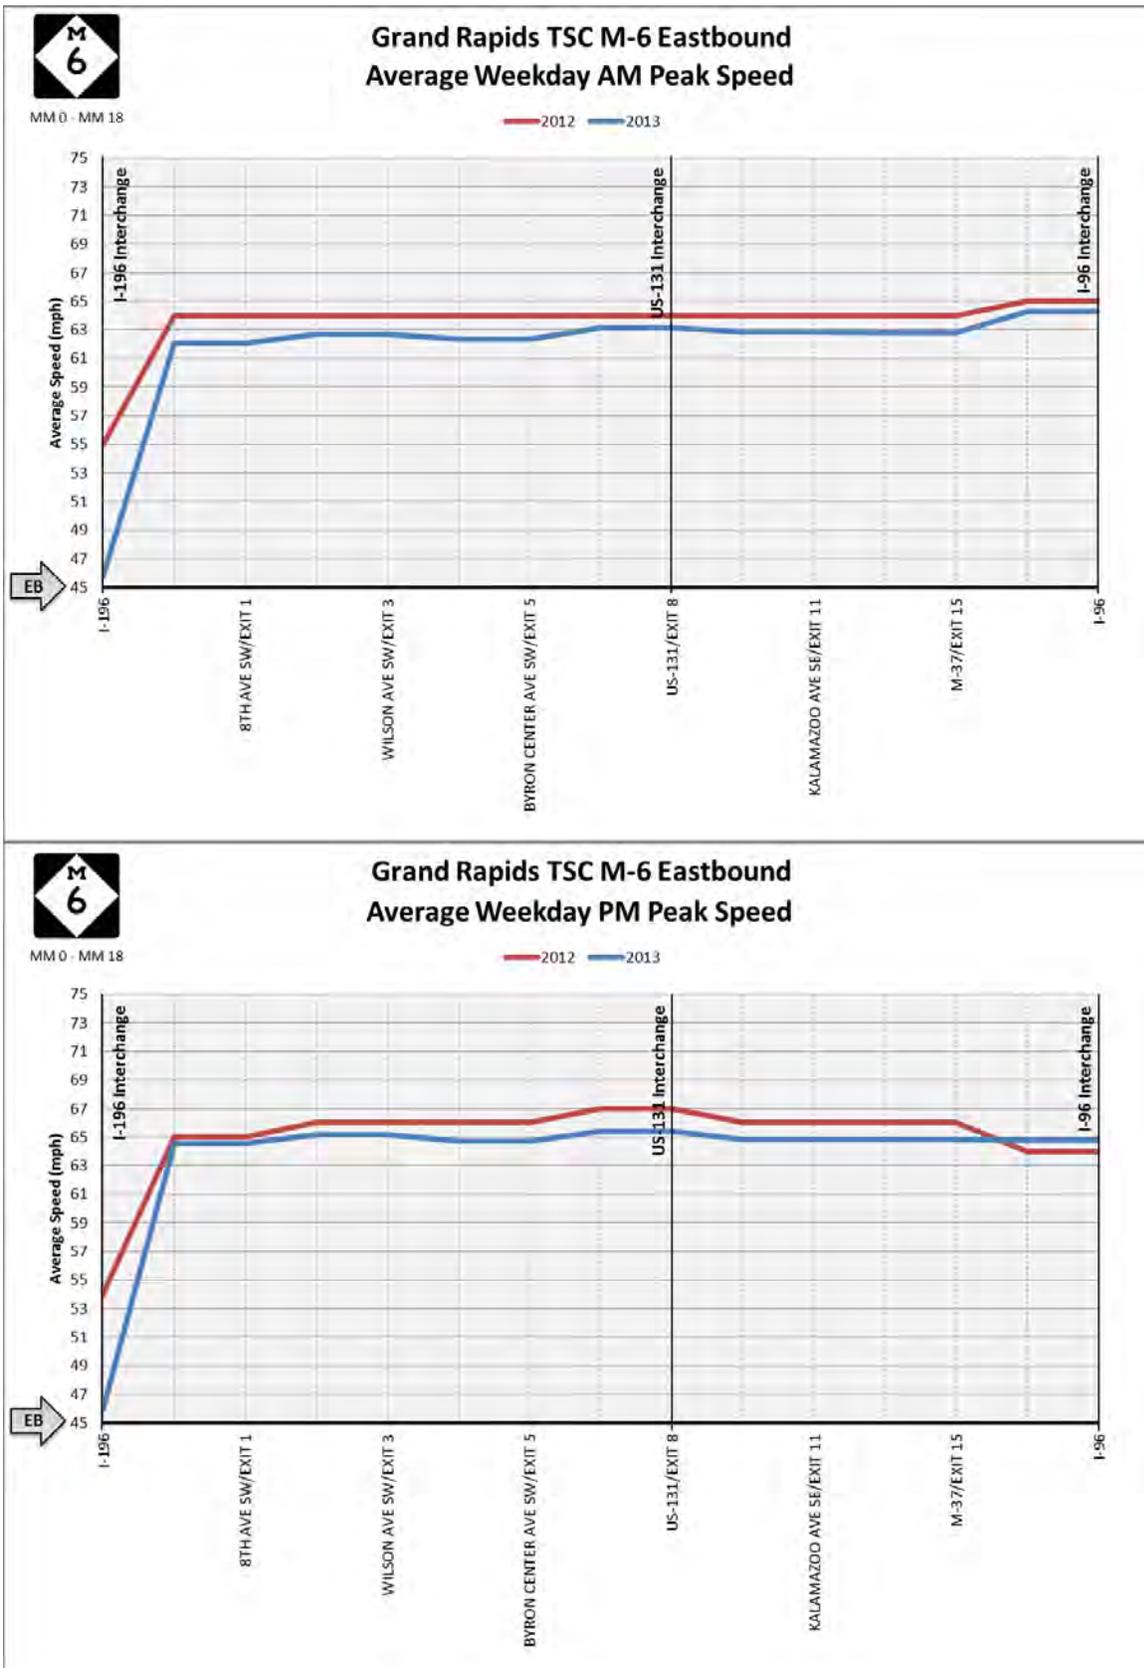


Figure 16

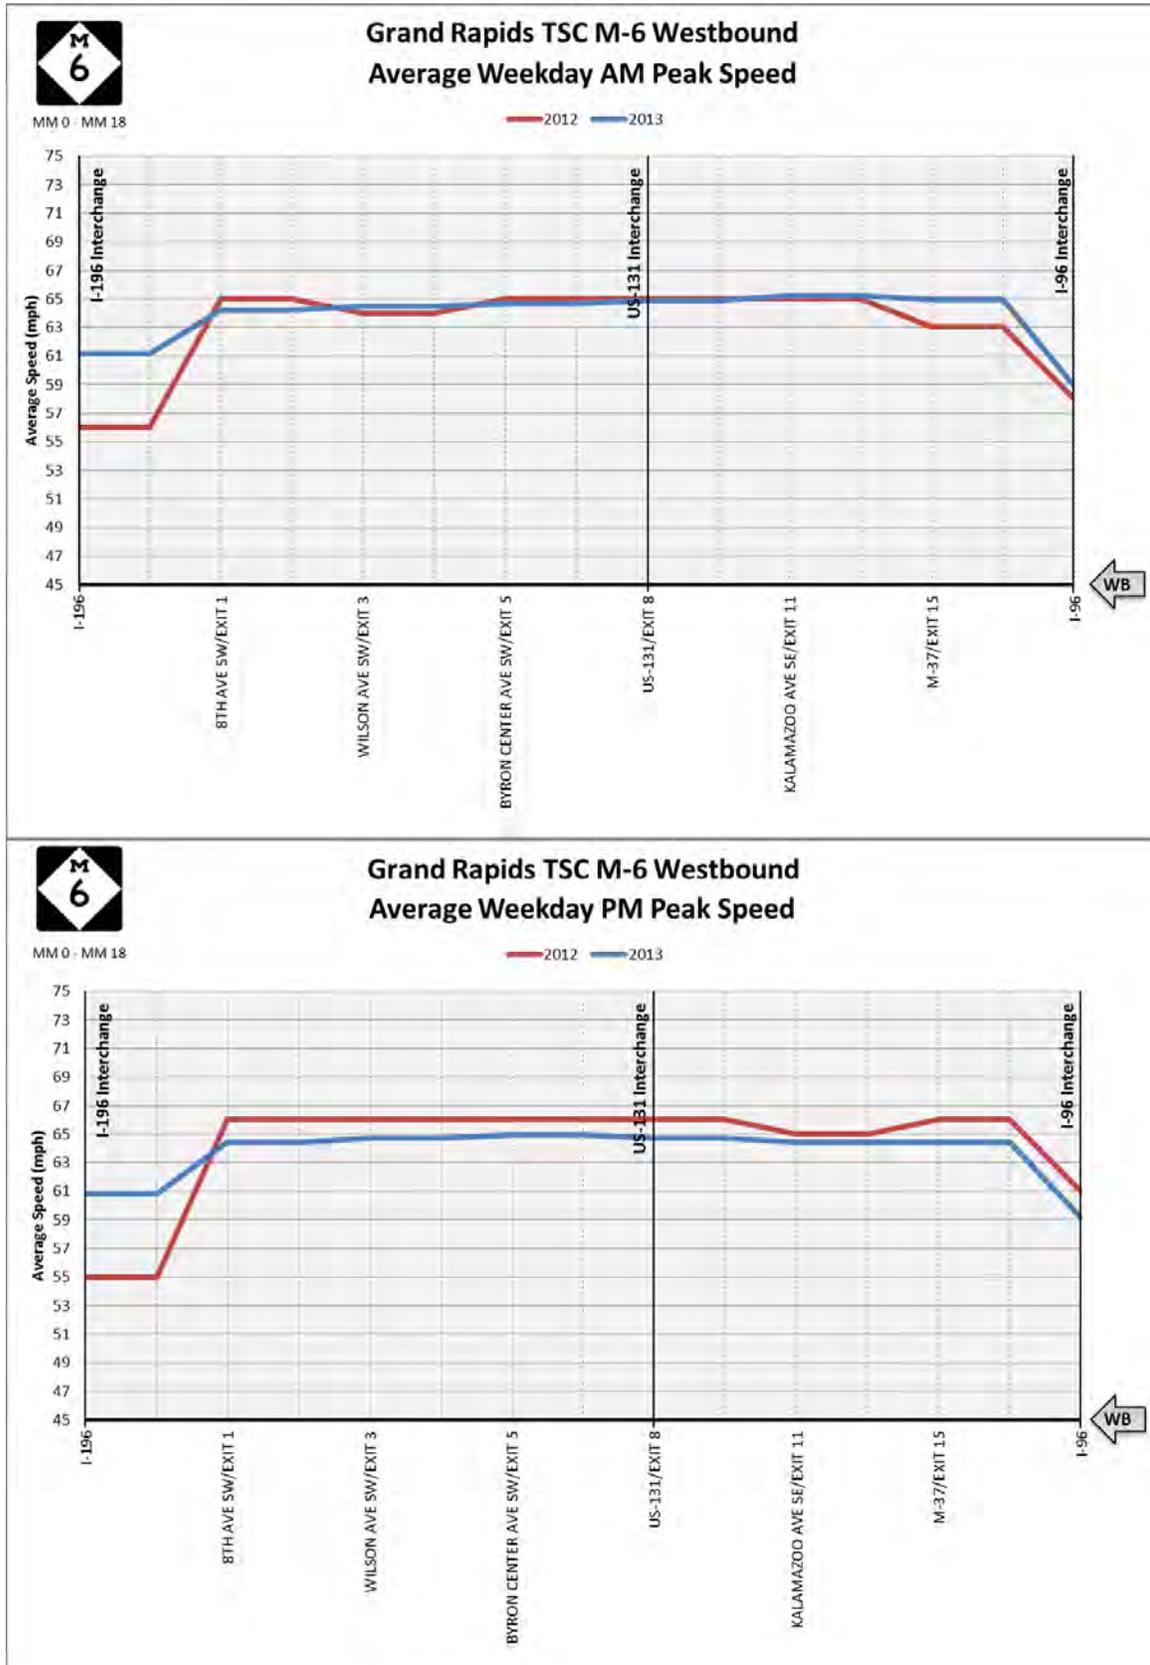


Figure 17

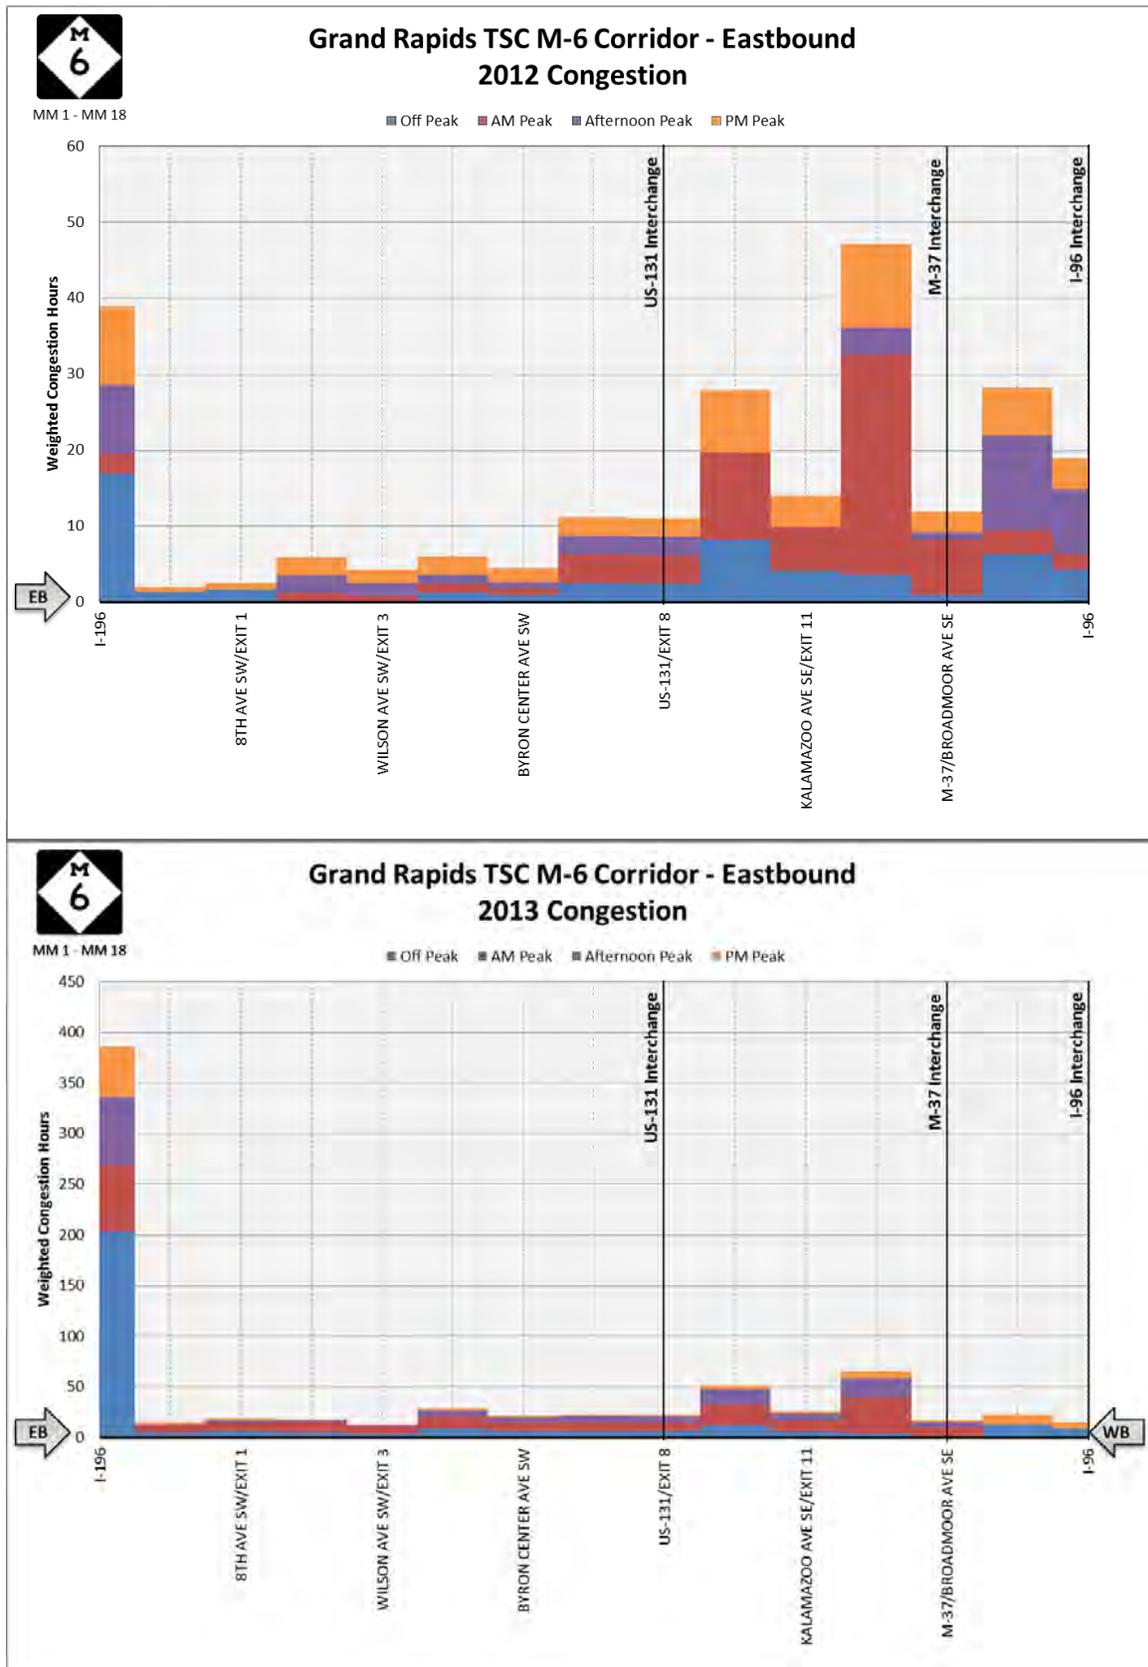


Figure 18

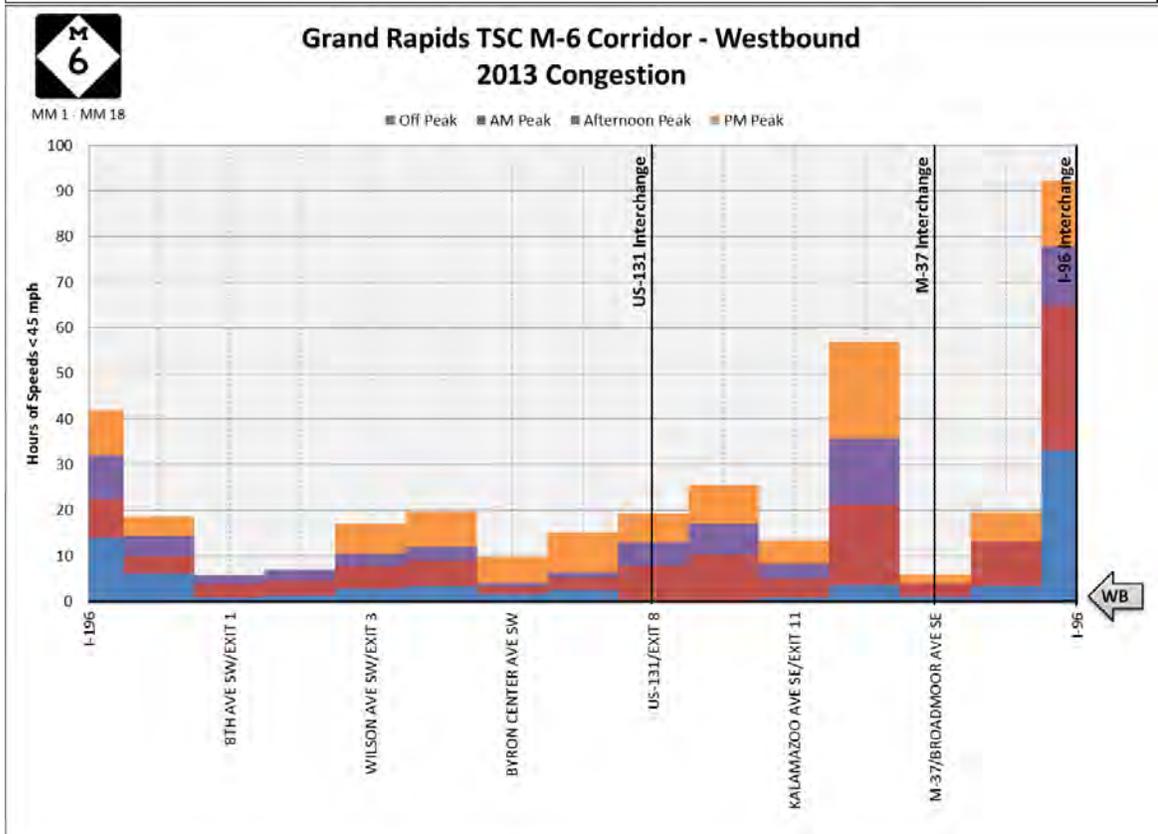
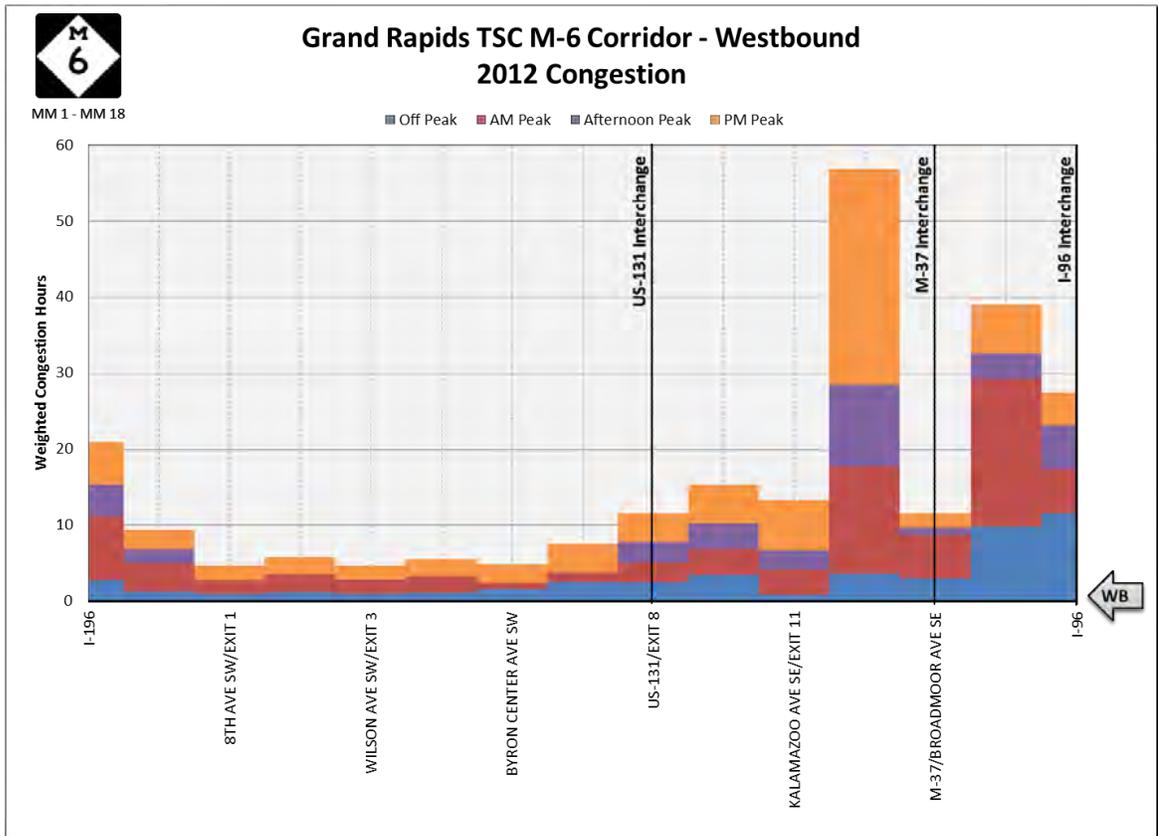


Figure 19

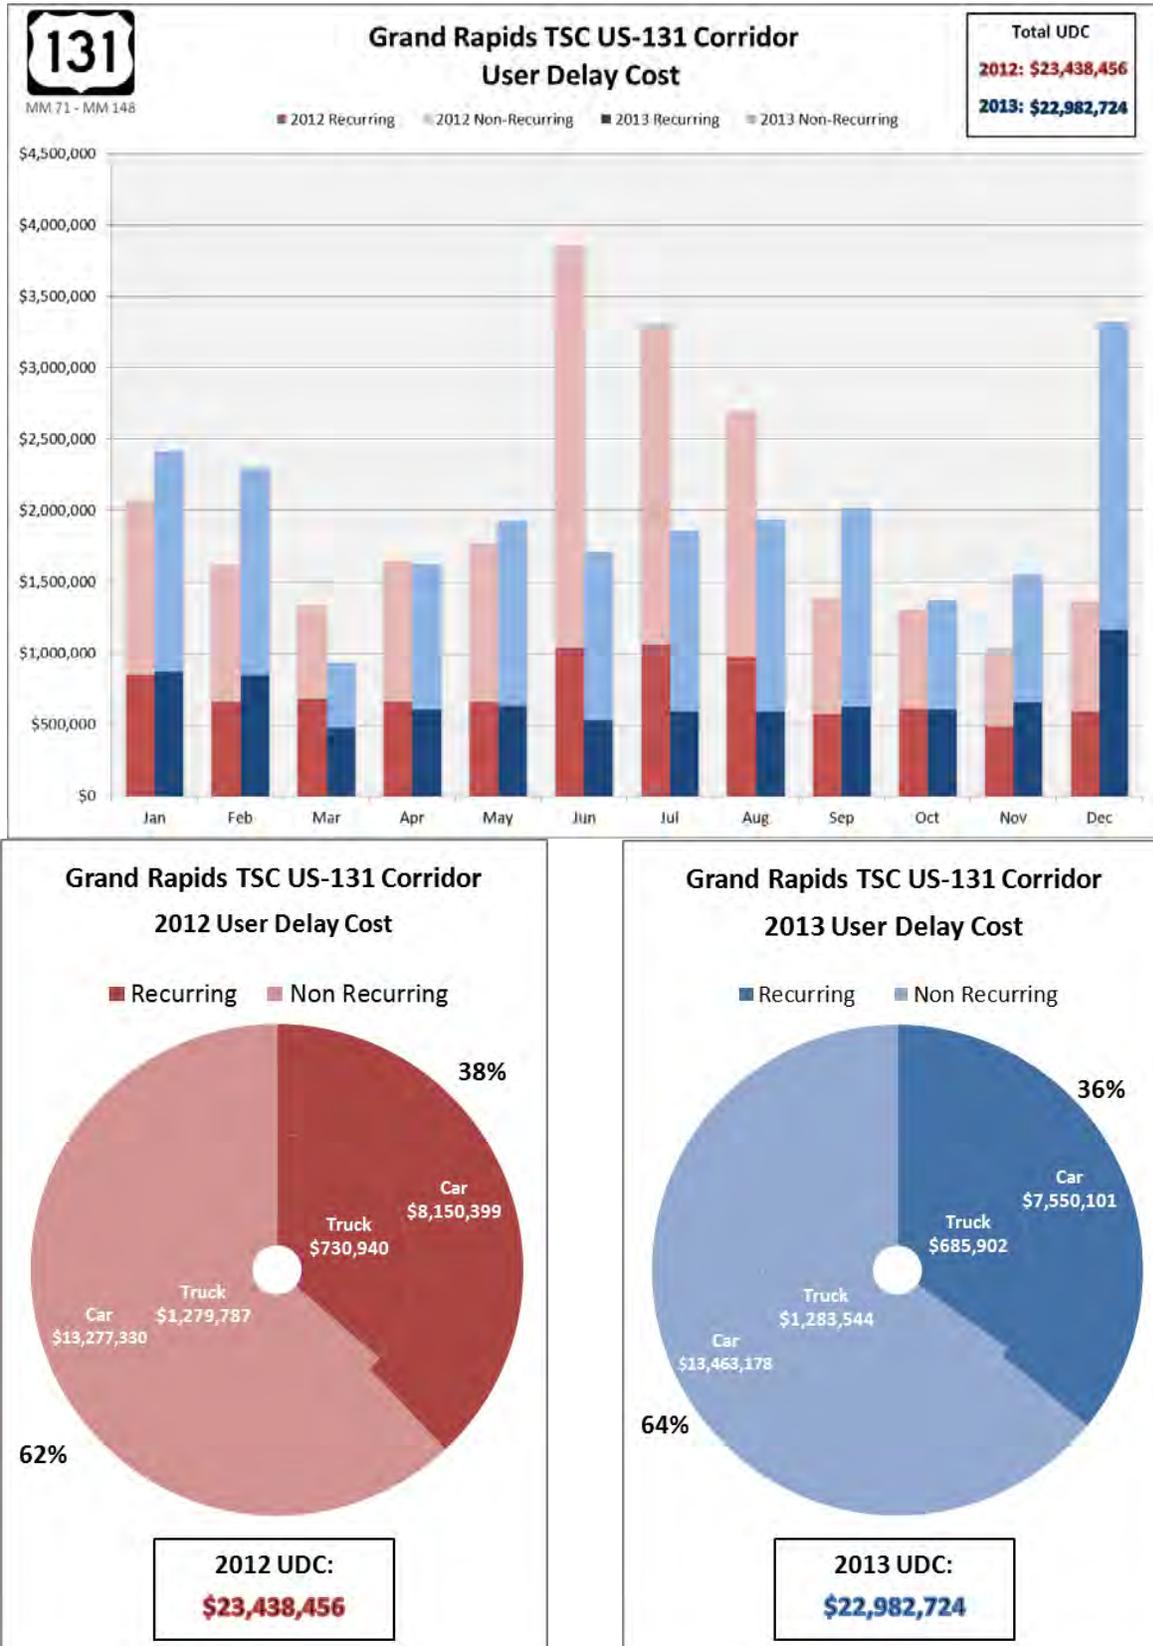


Figure 20

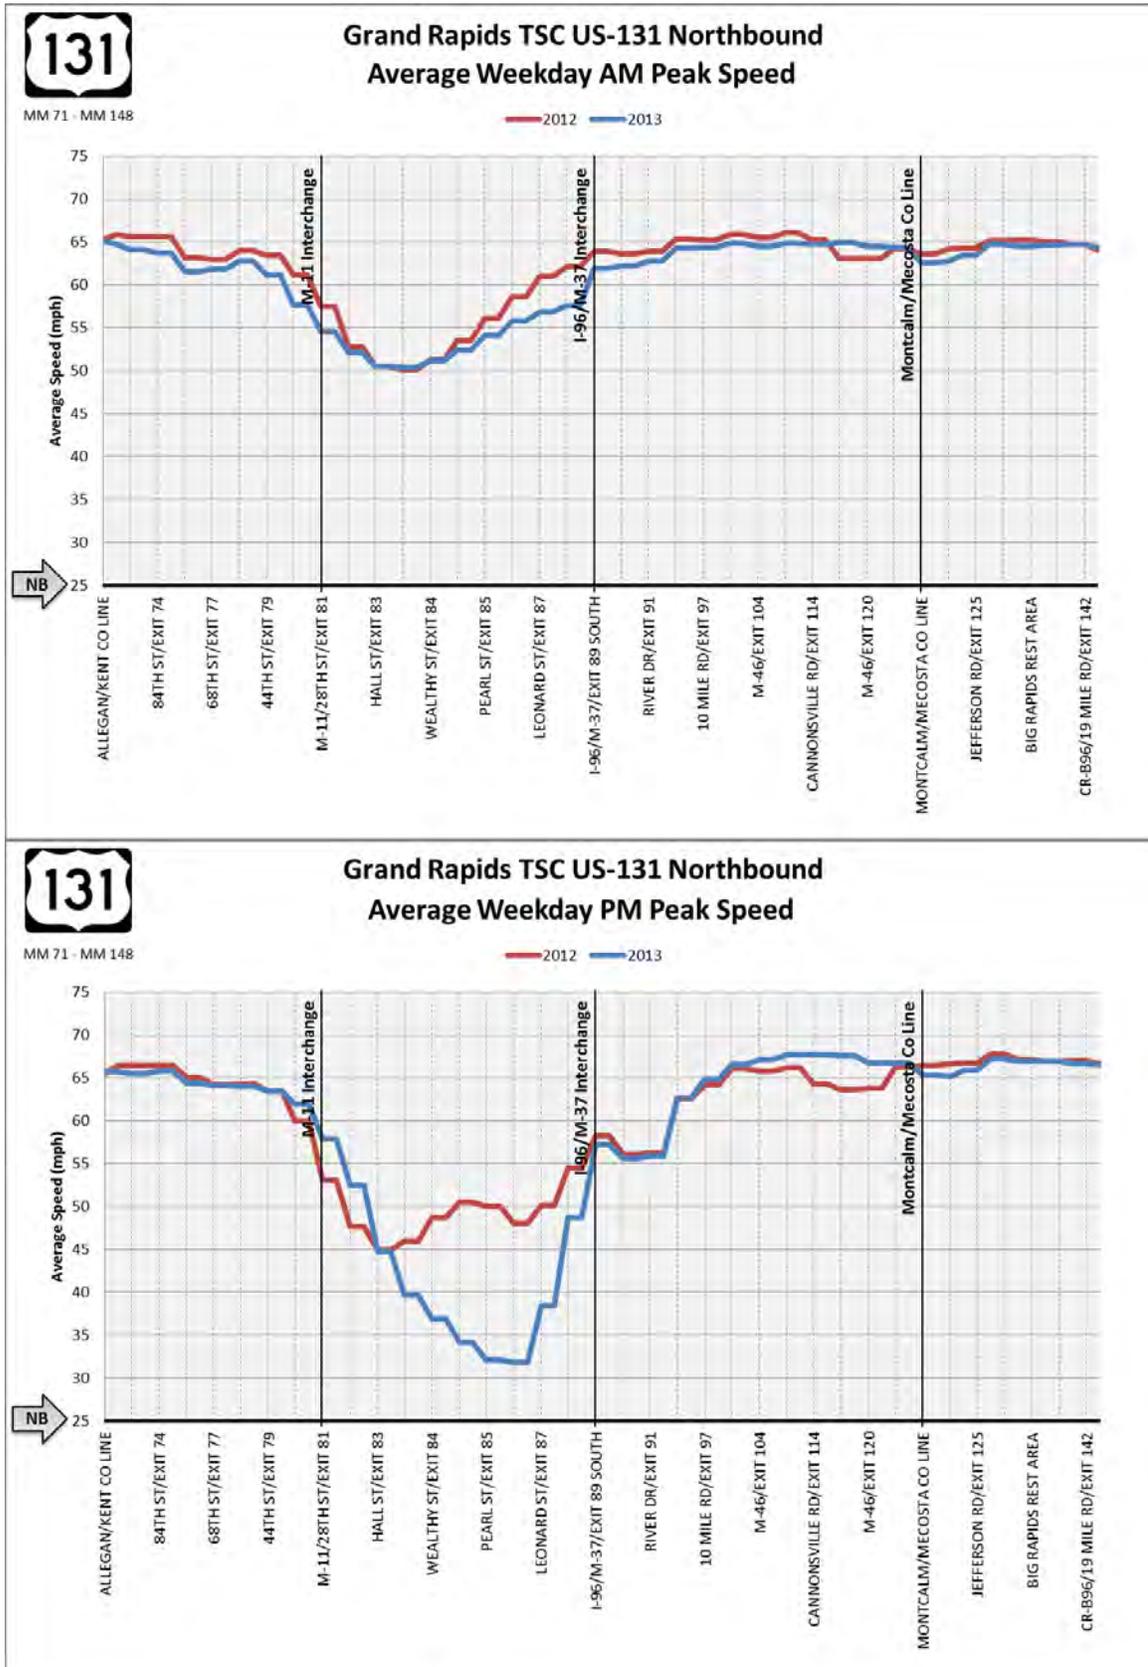


Figure 21

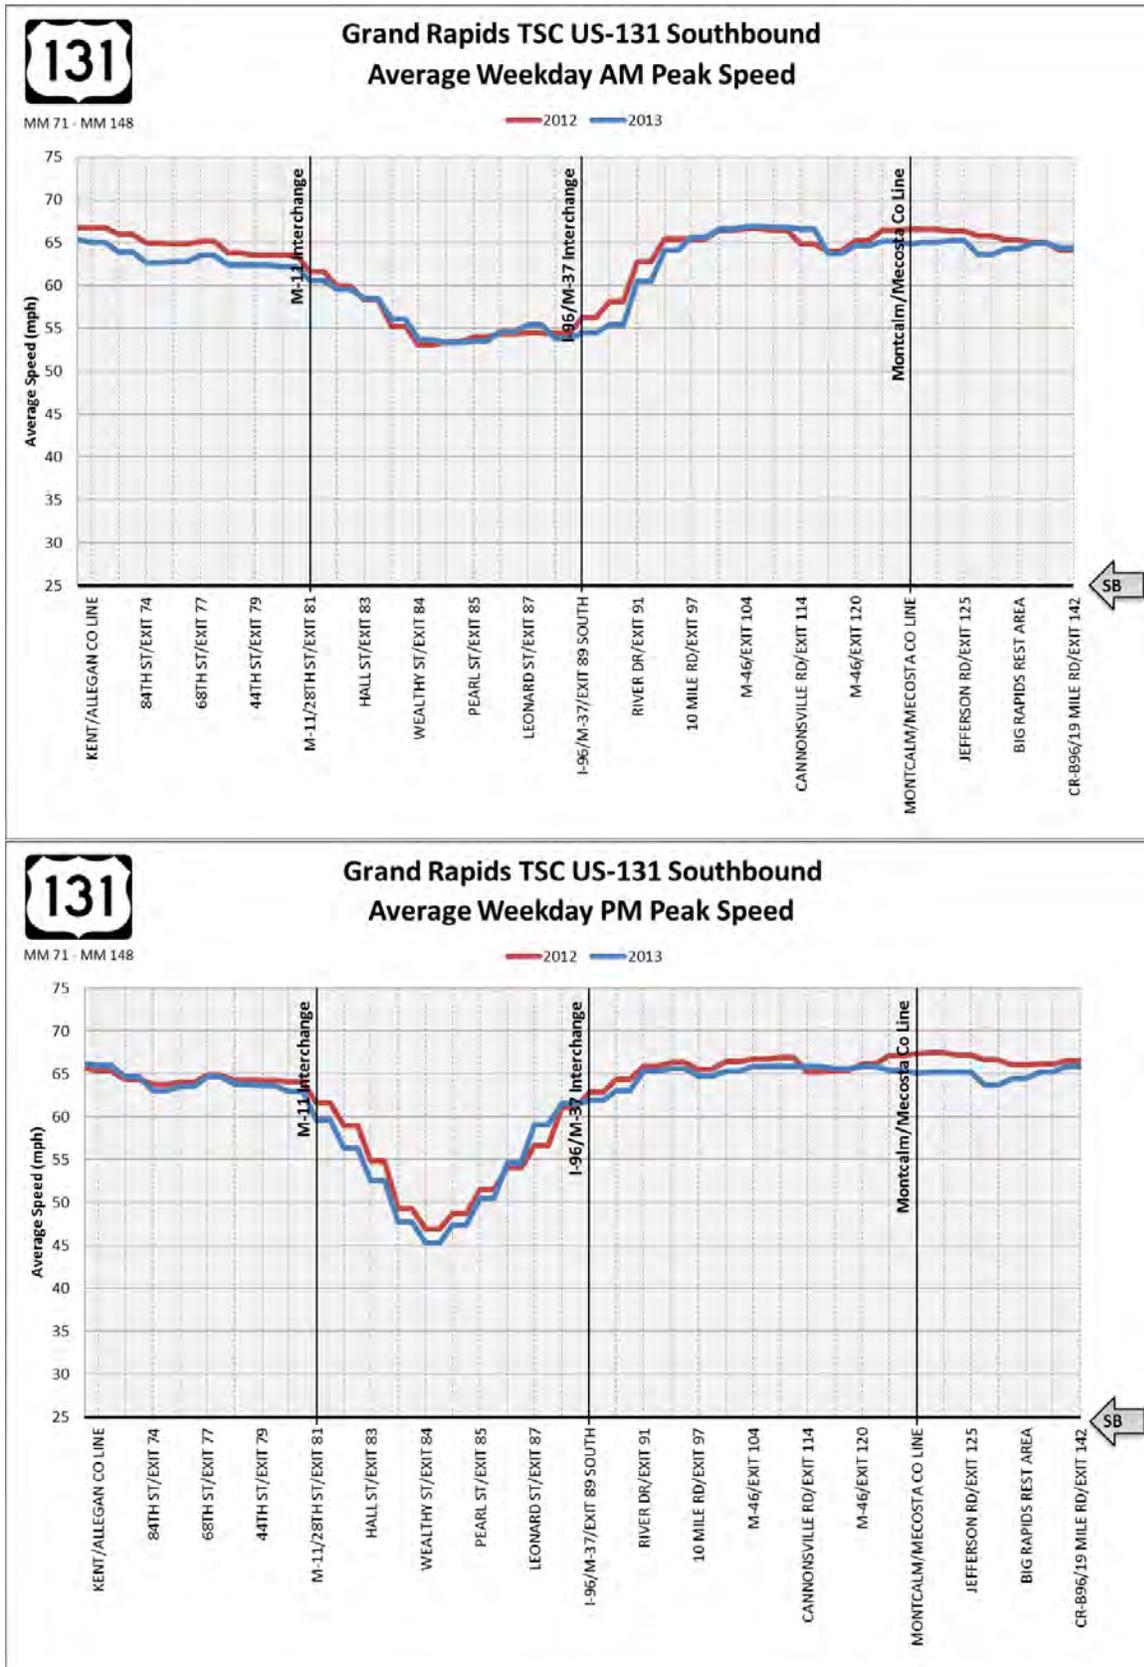


Figure 22

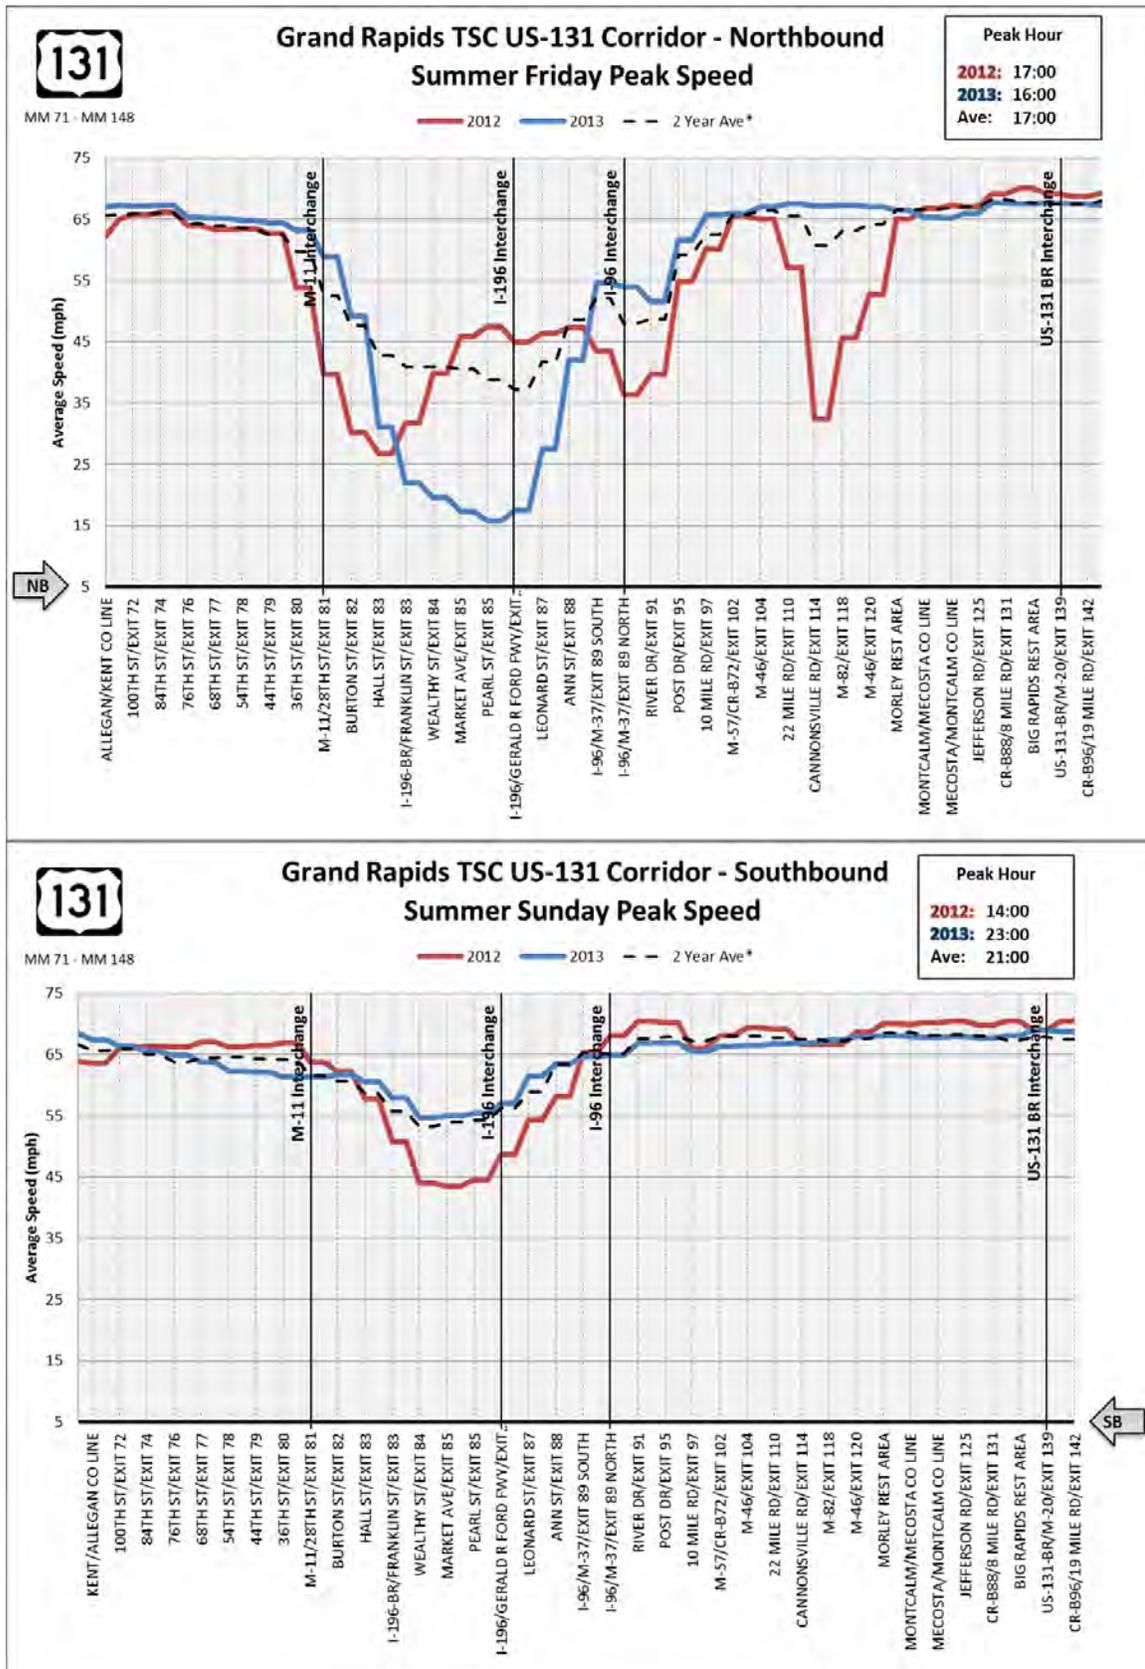


Figure 23

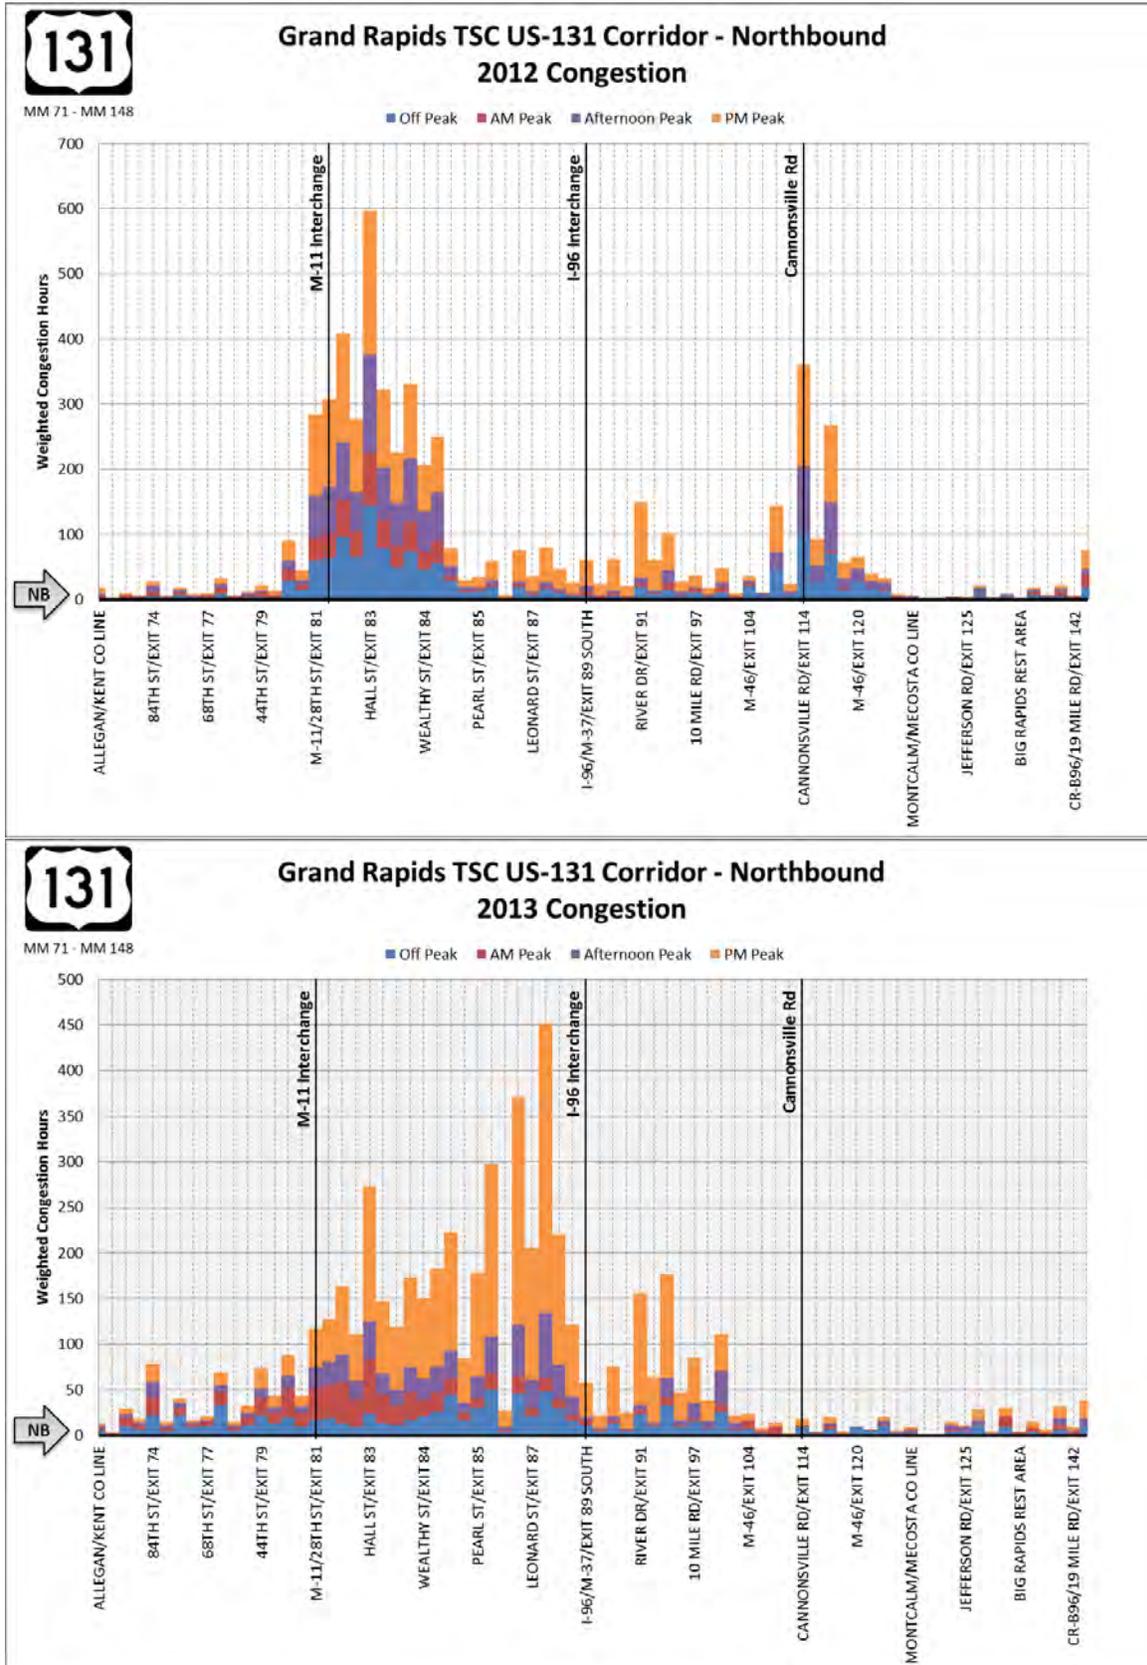


Figure 24

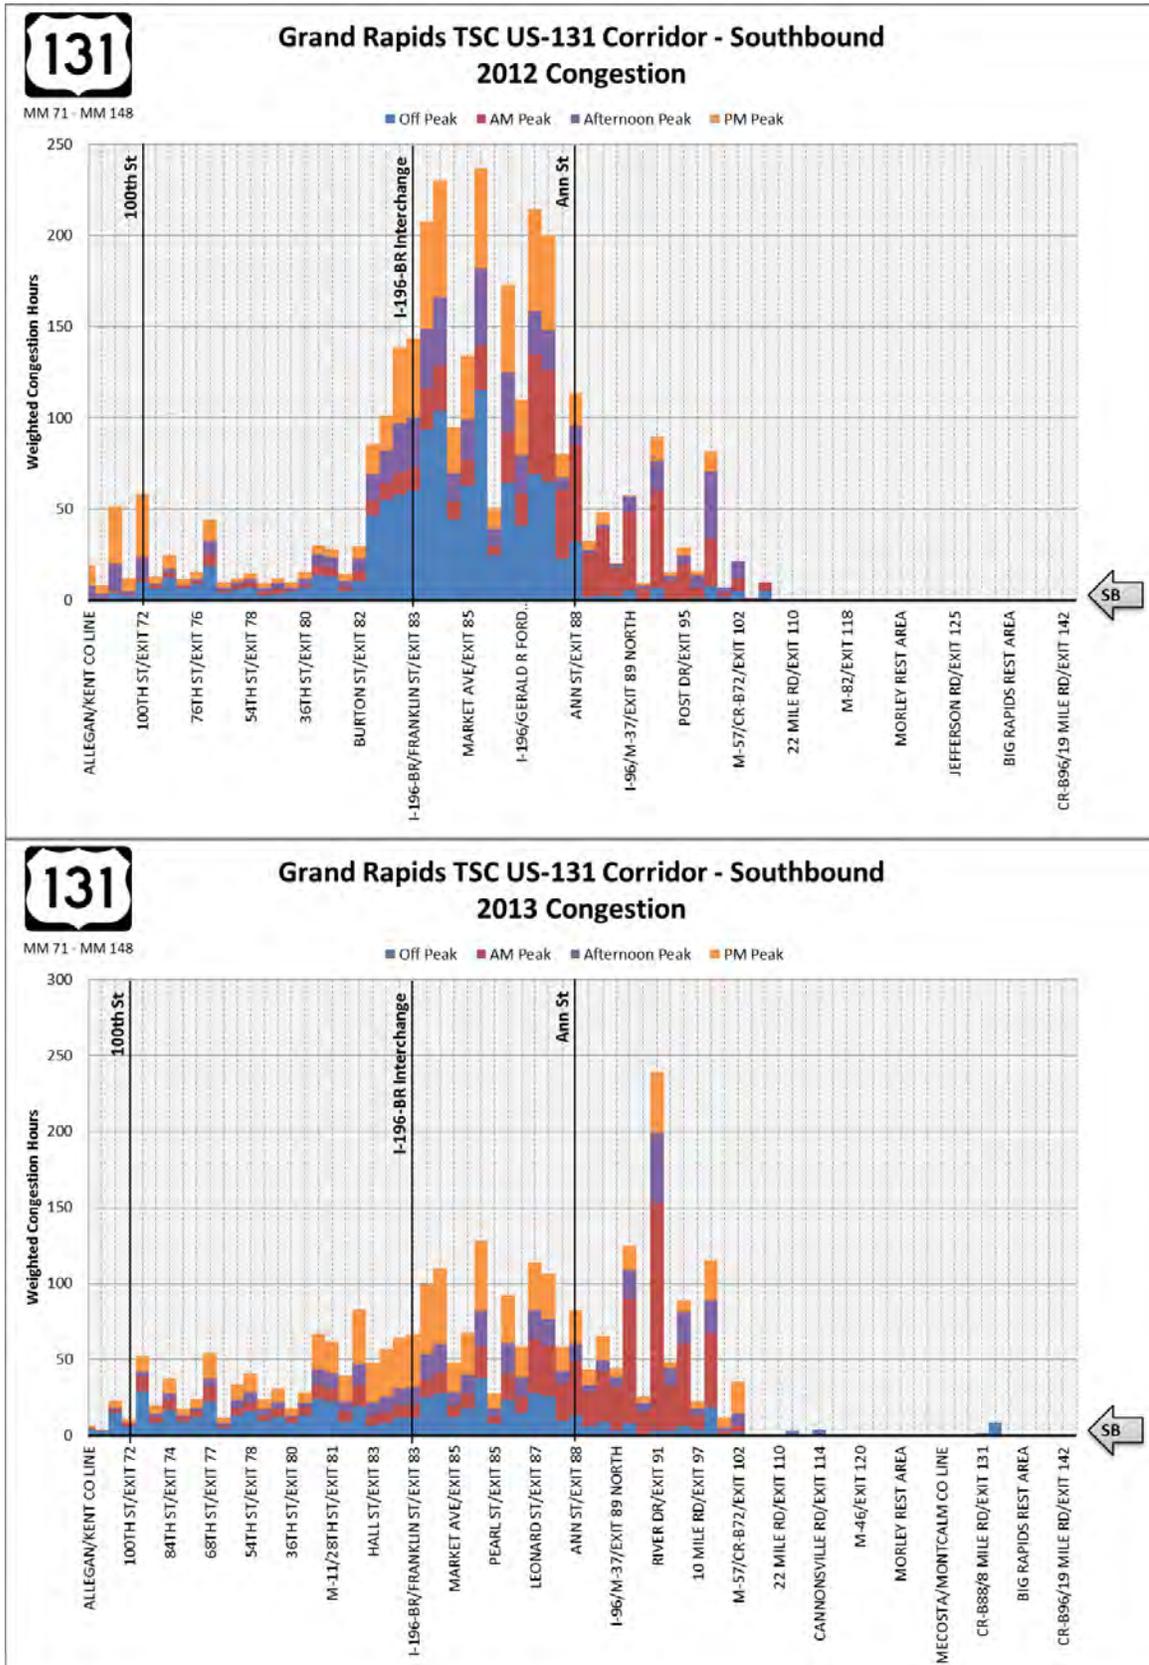


Figure 25

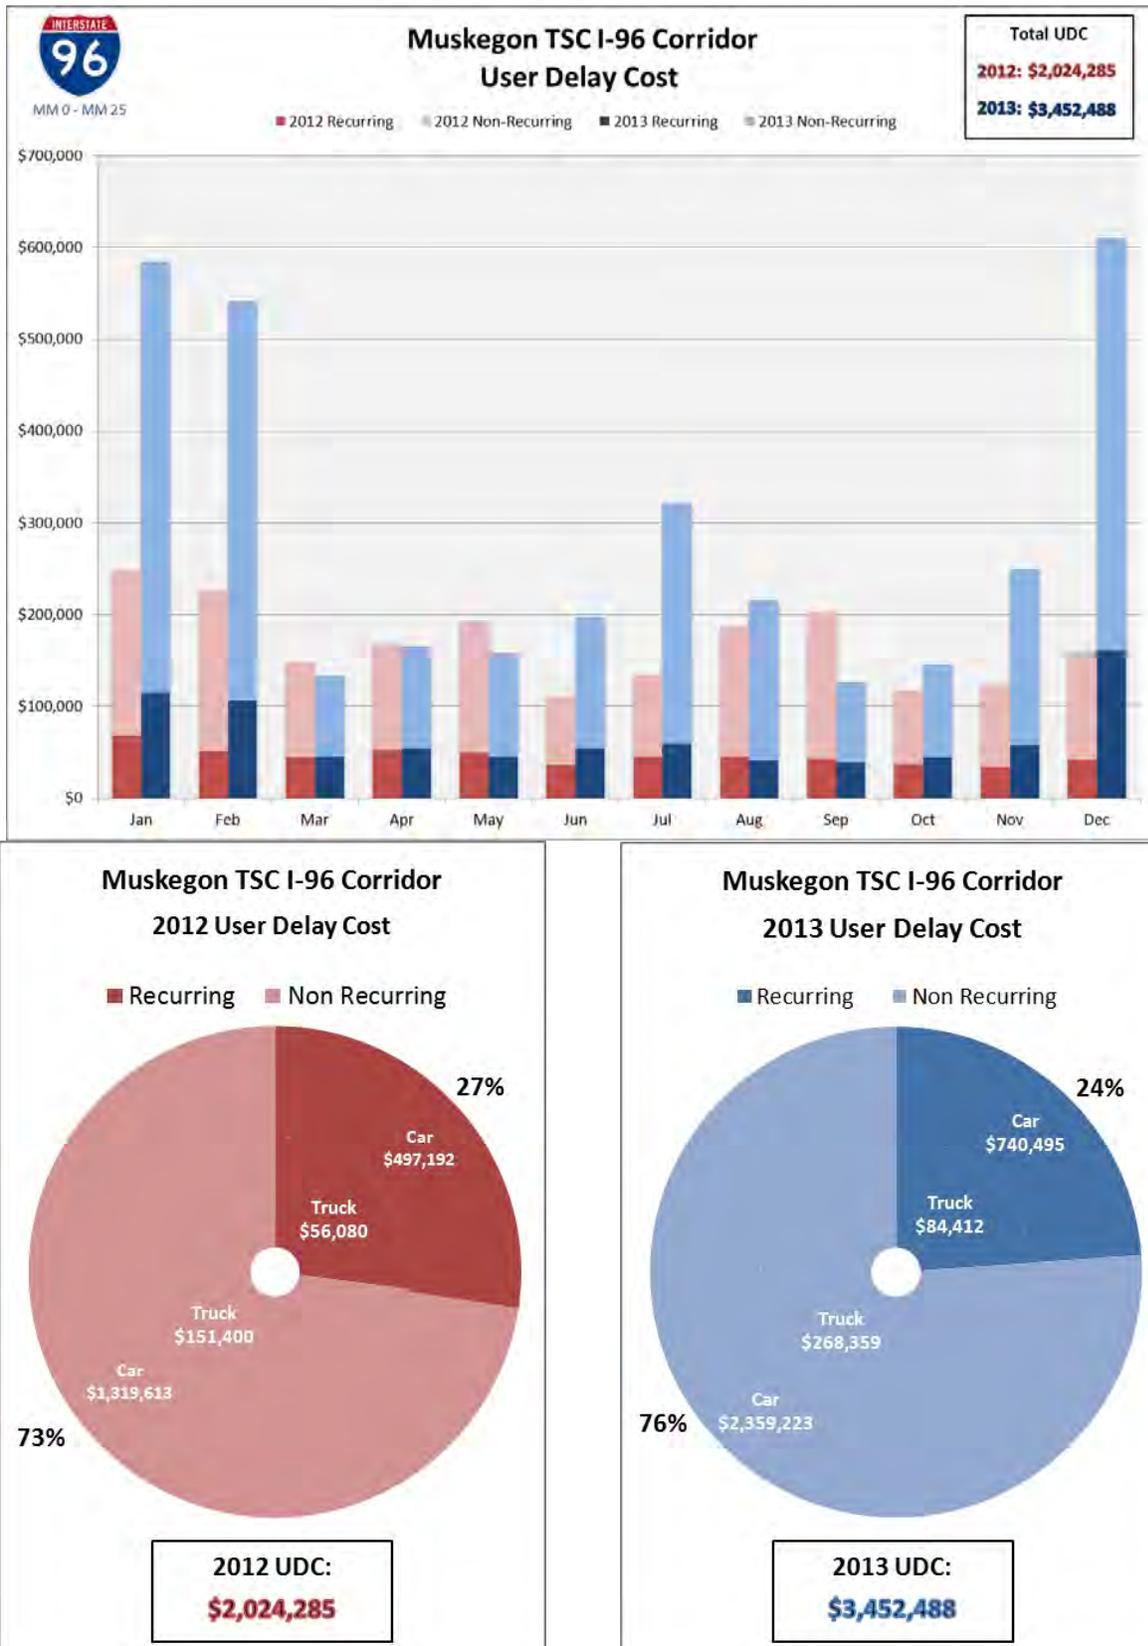


Figure 26

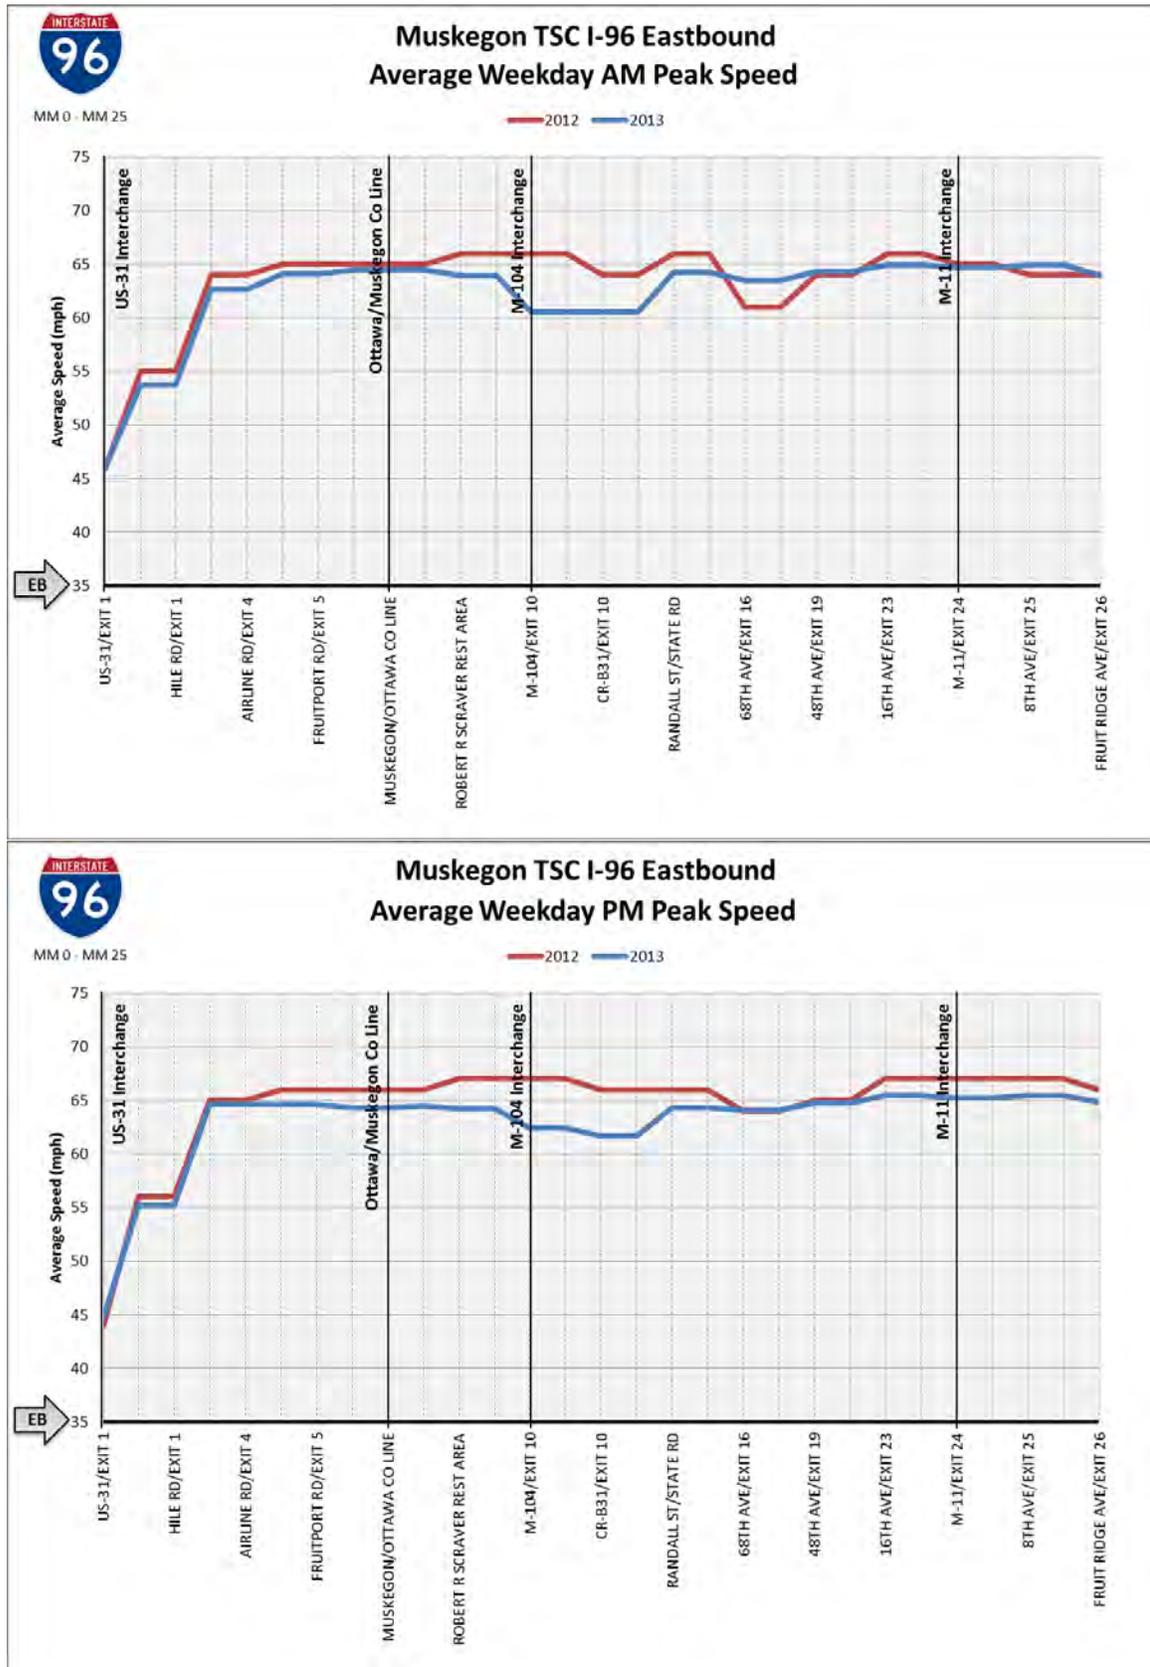


Figure 27

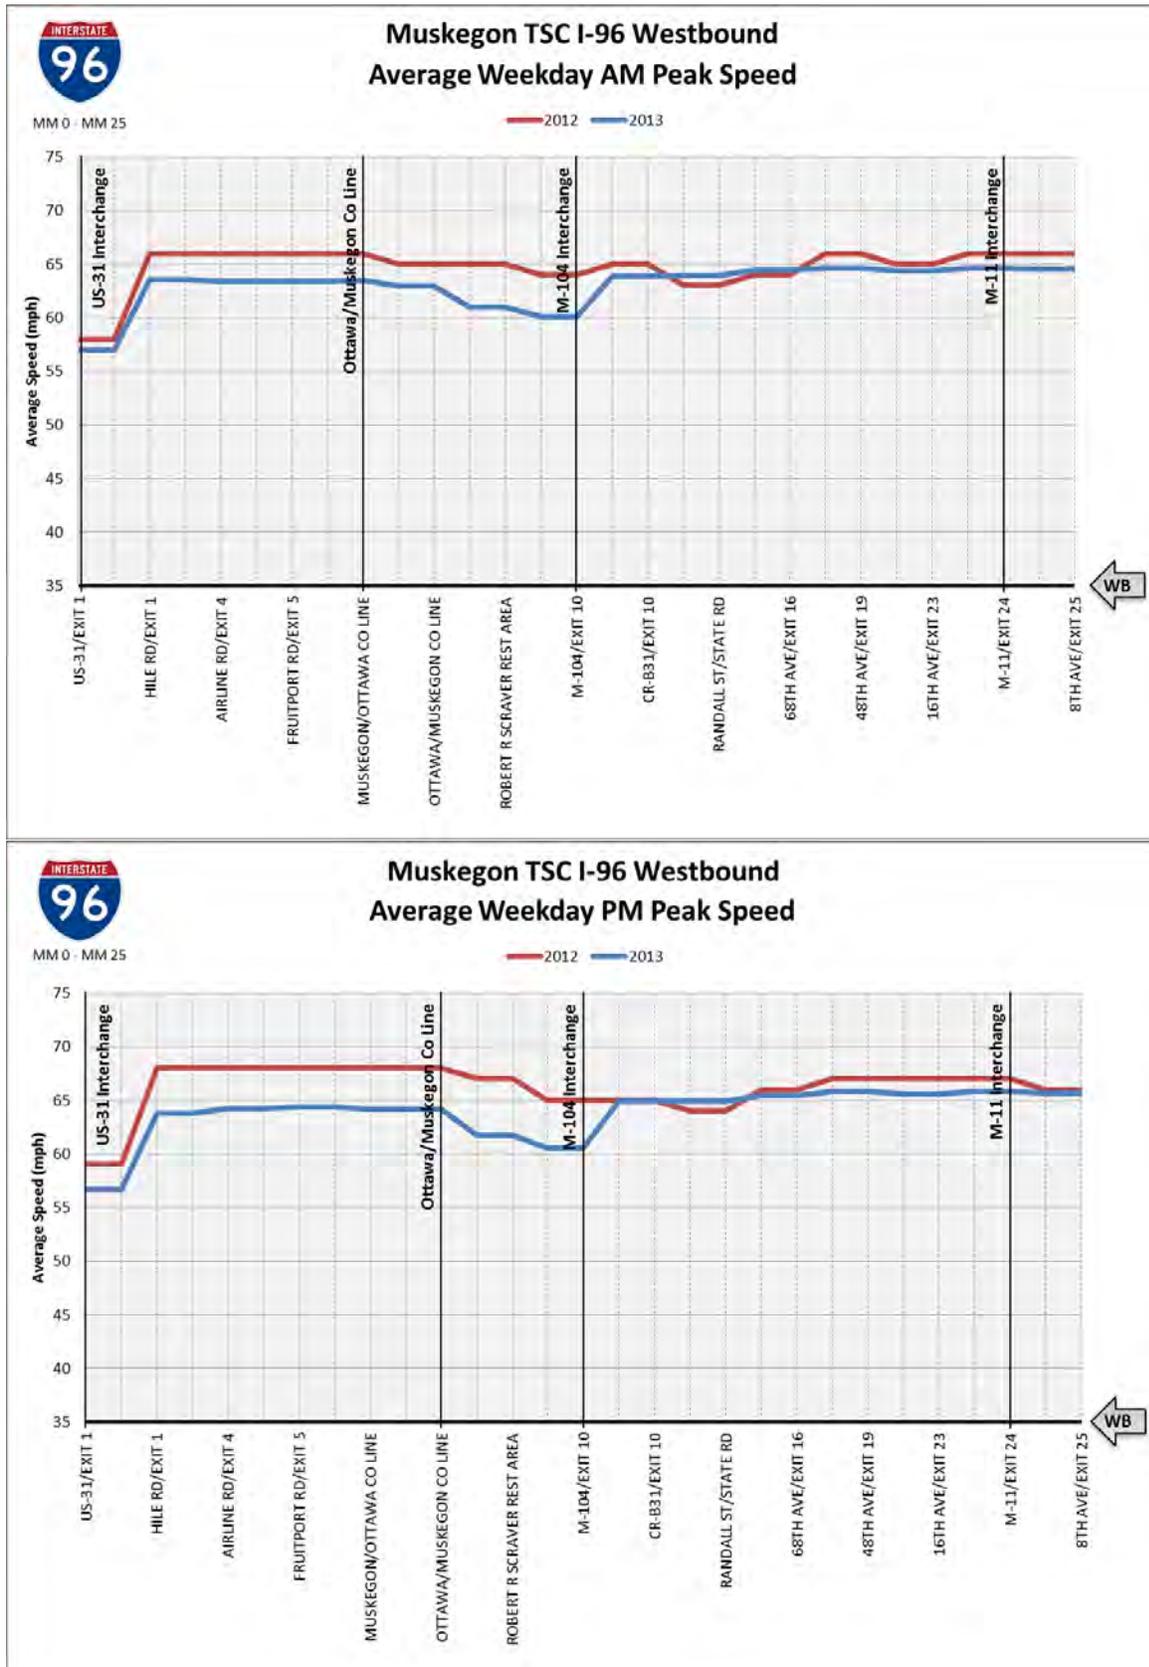


Figure 28

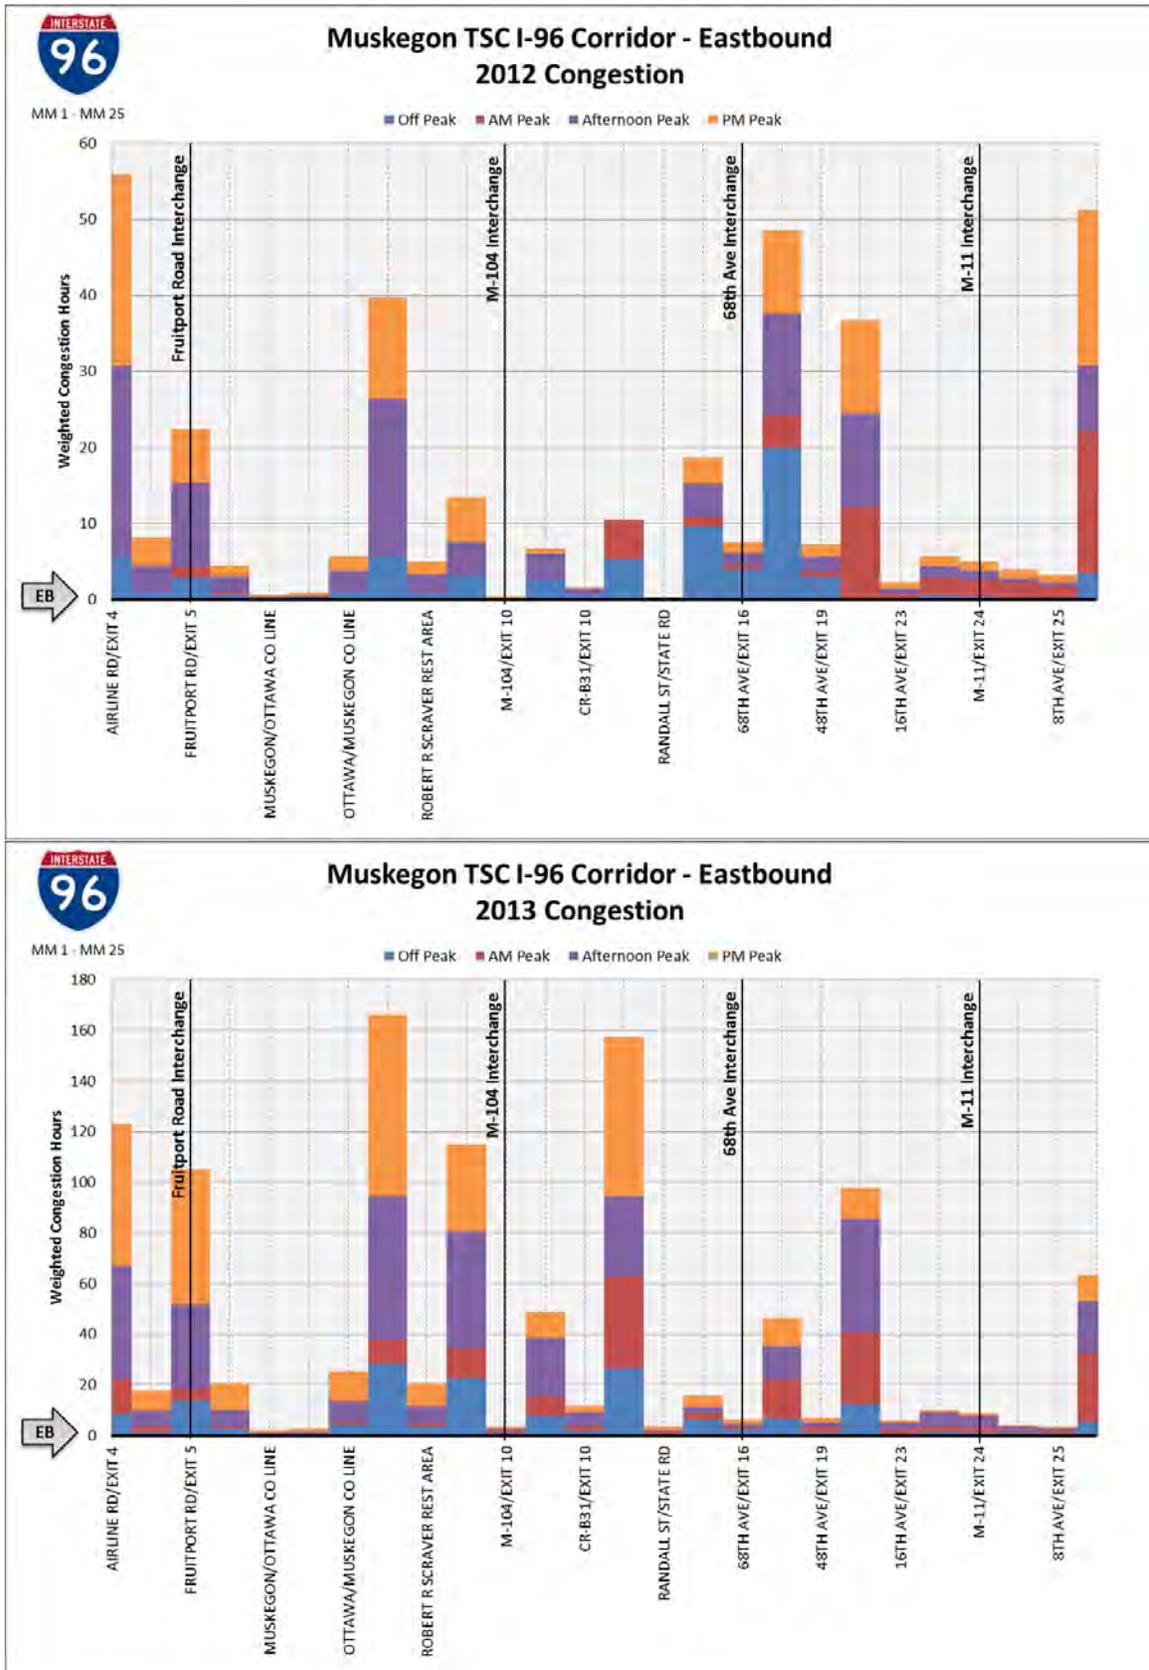


Figure 29

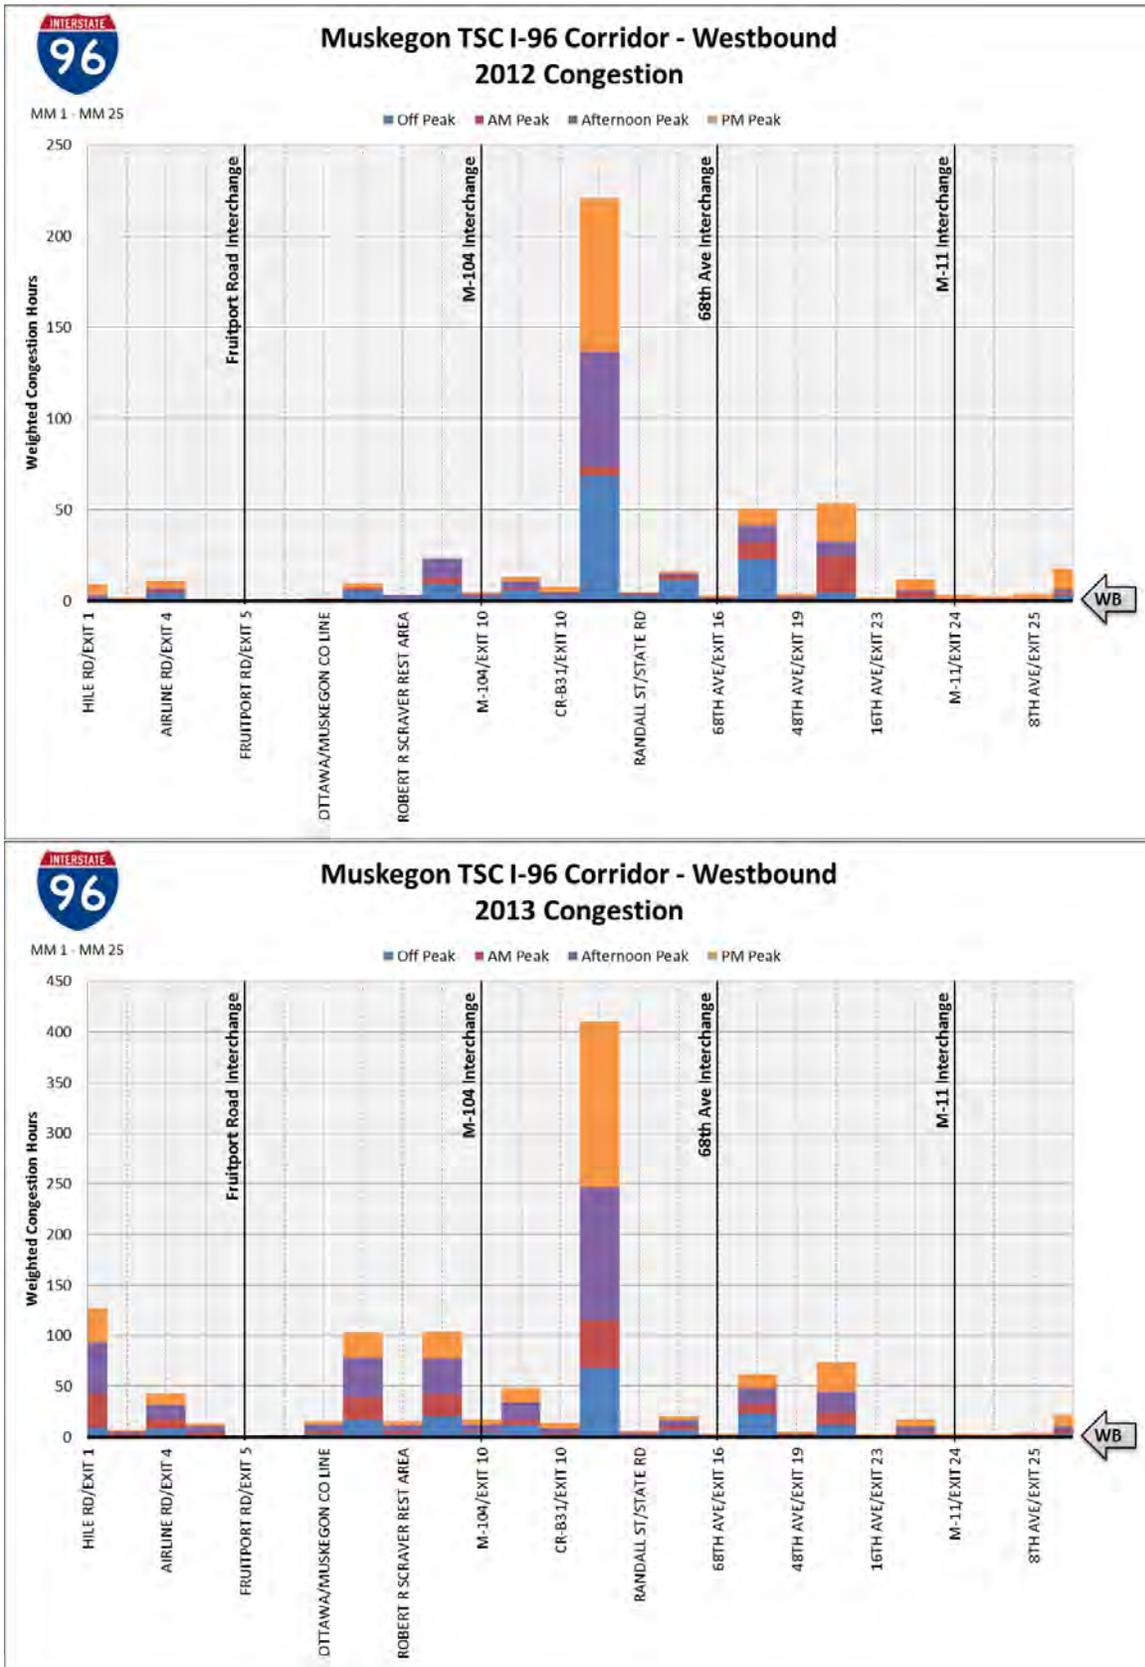


Figure 30

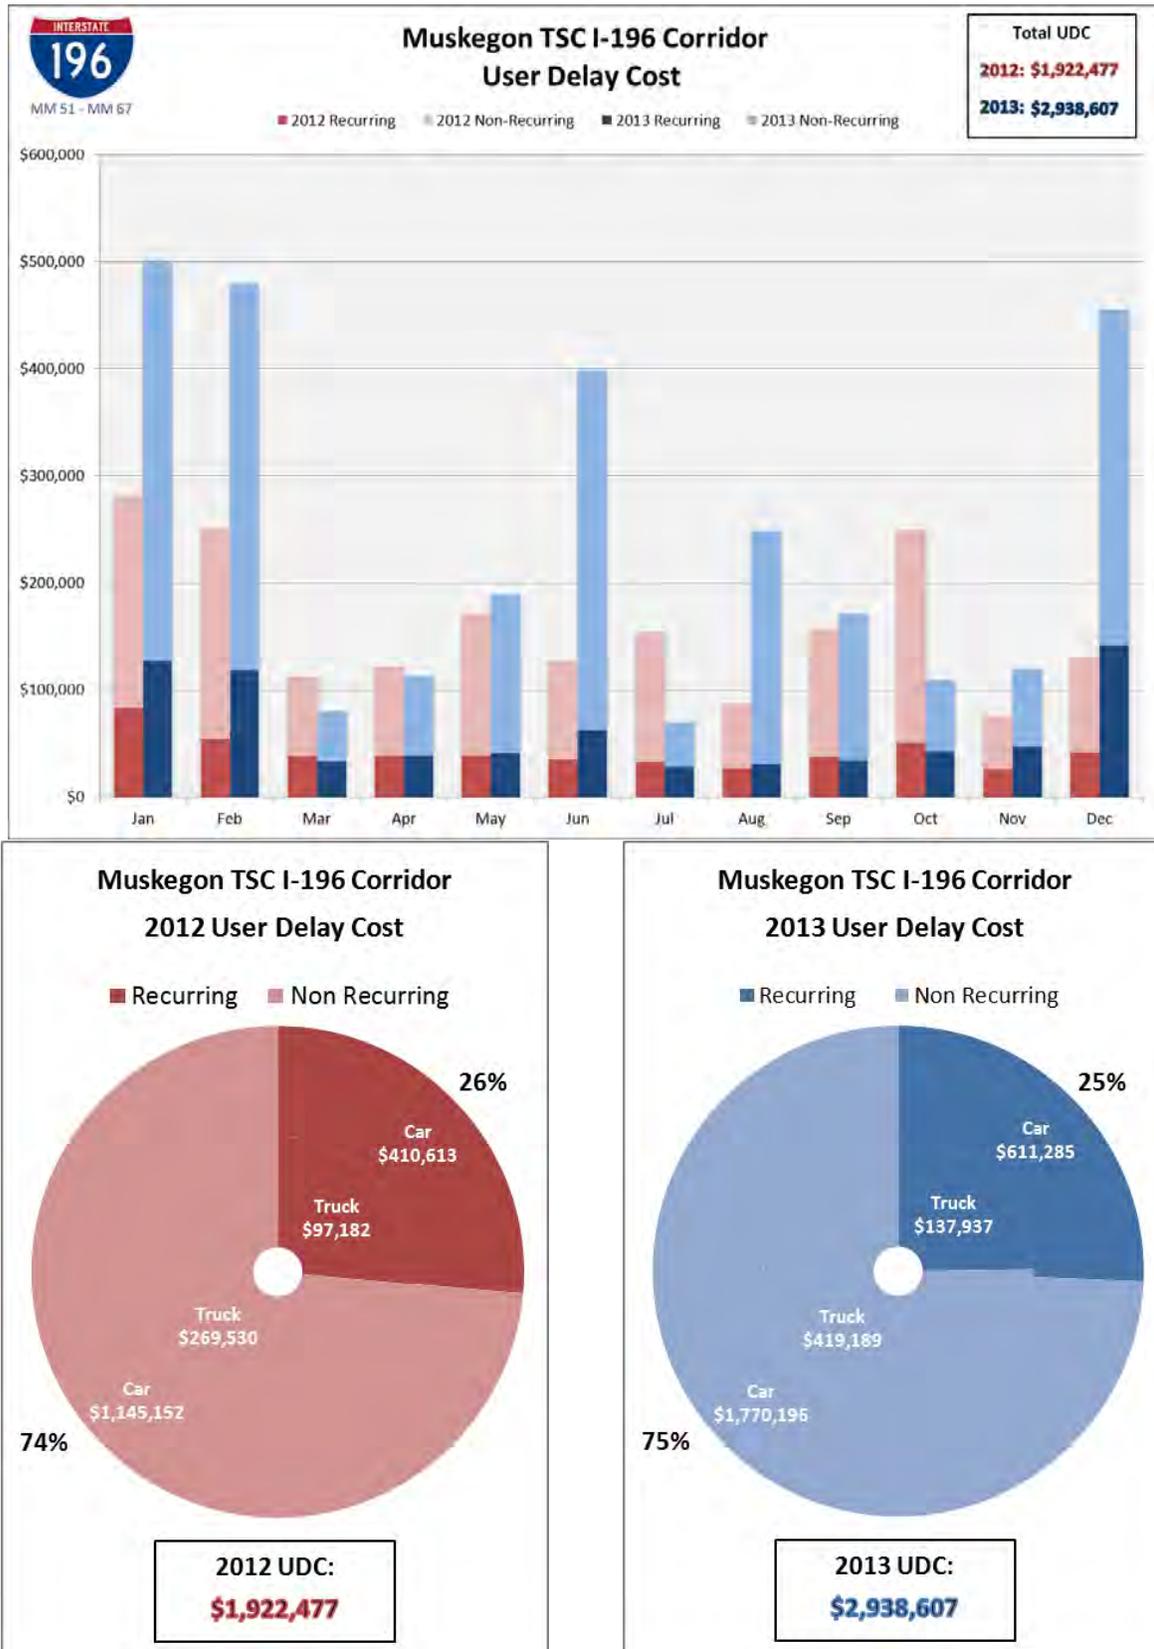


Figure 31

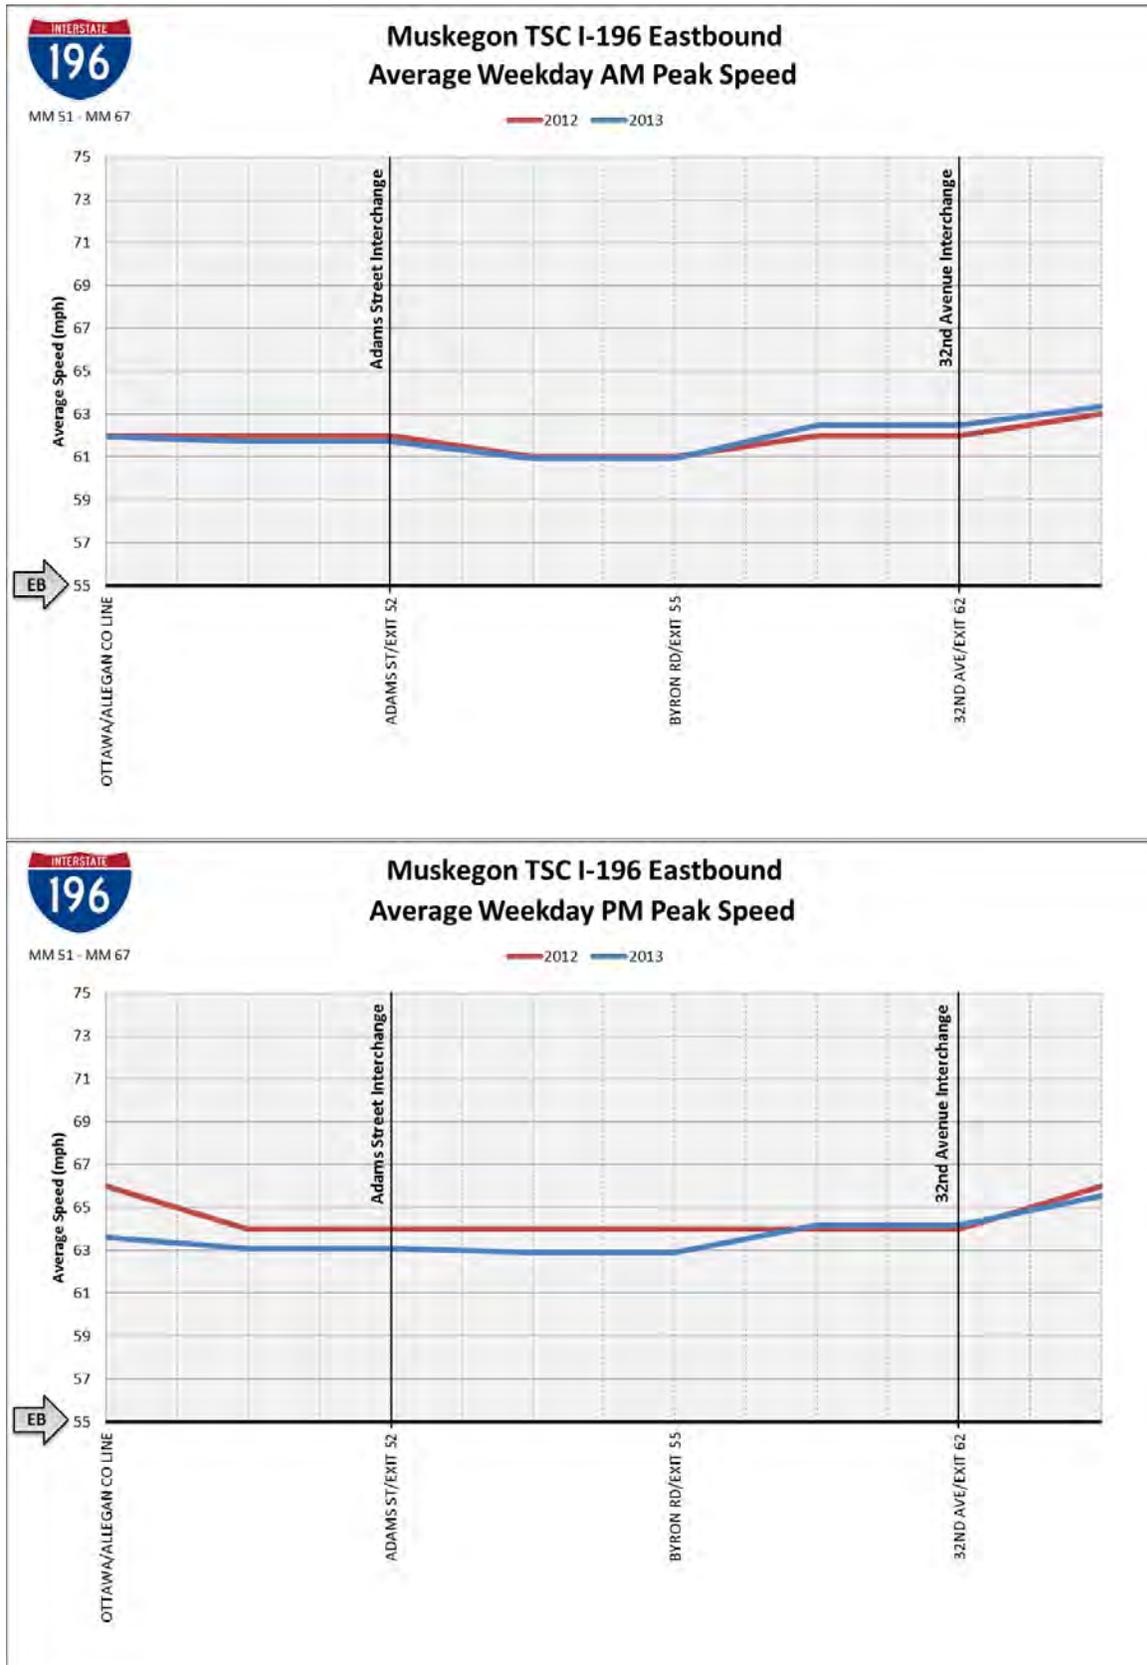


Figure 32

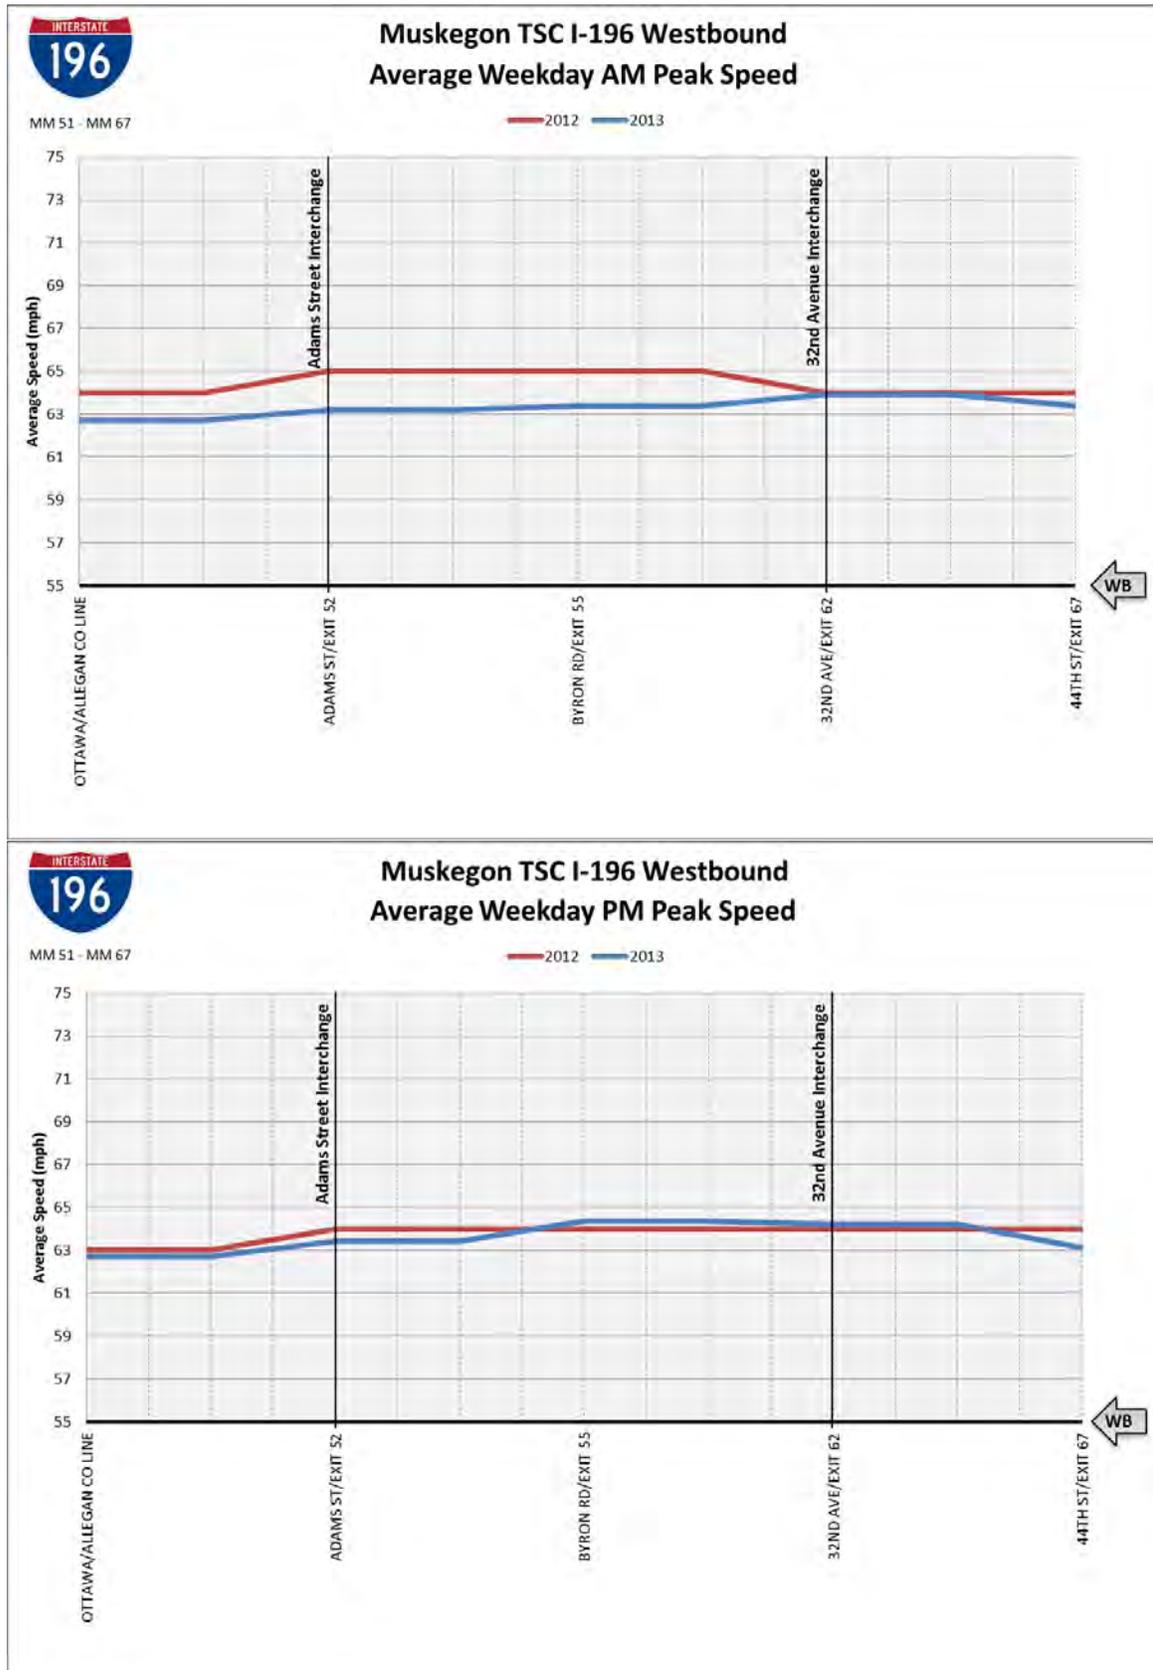


Figure 33

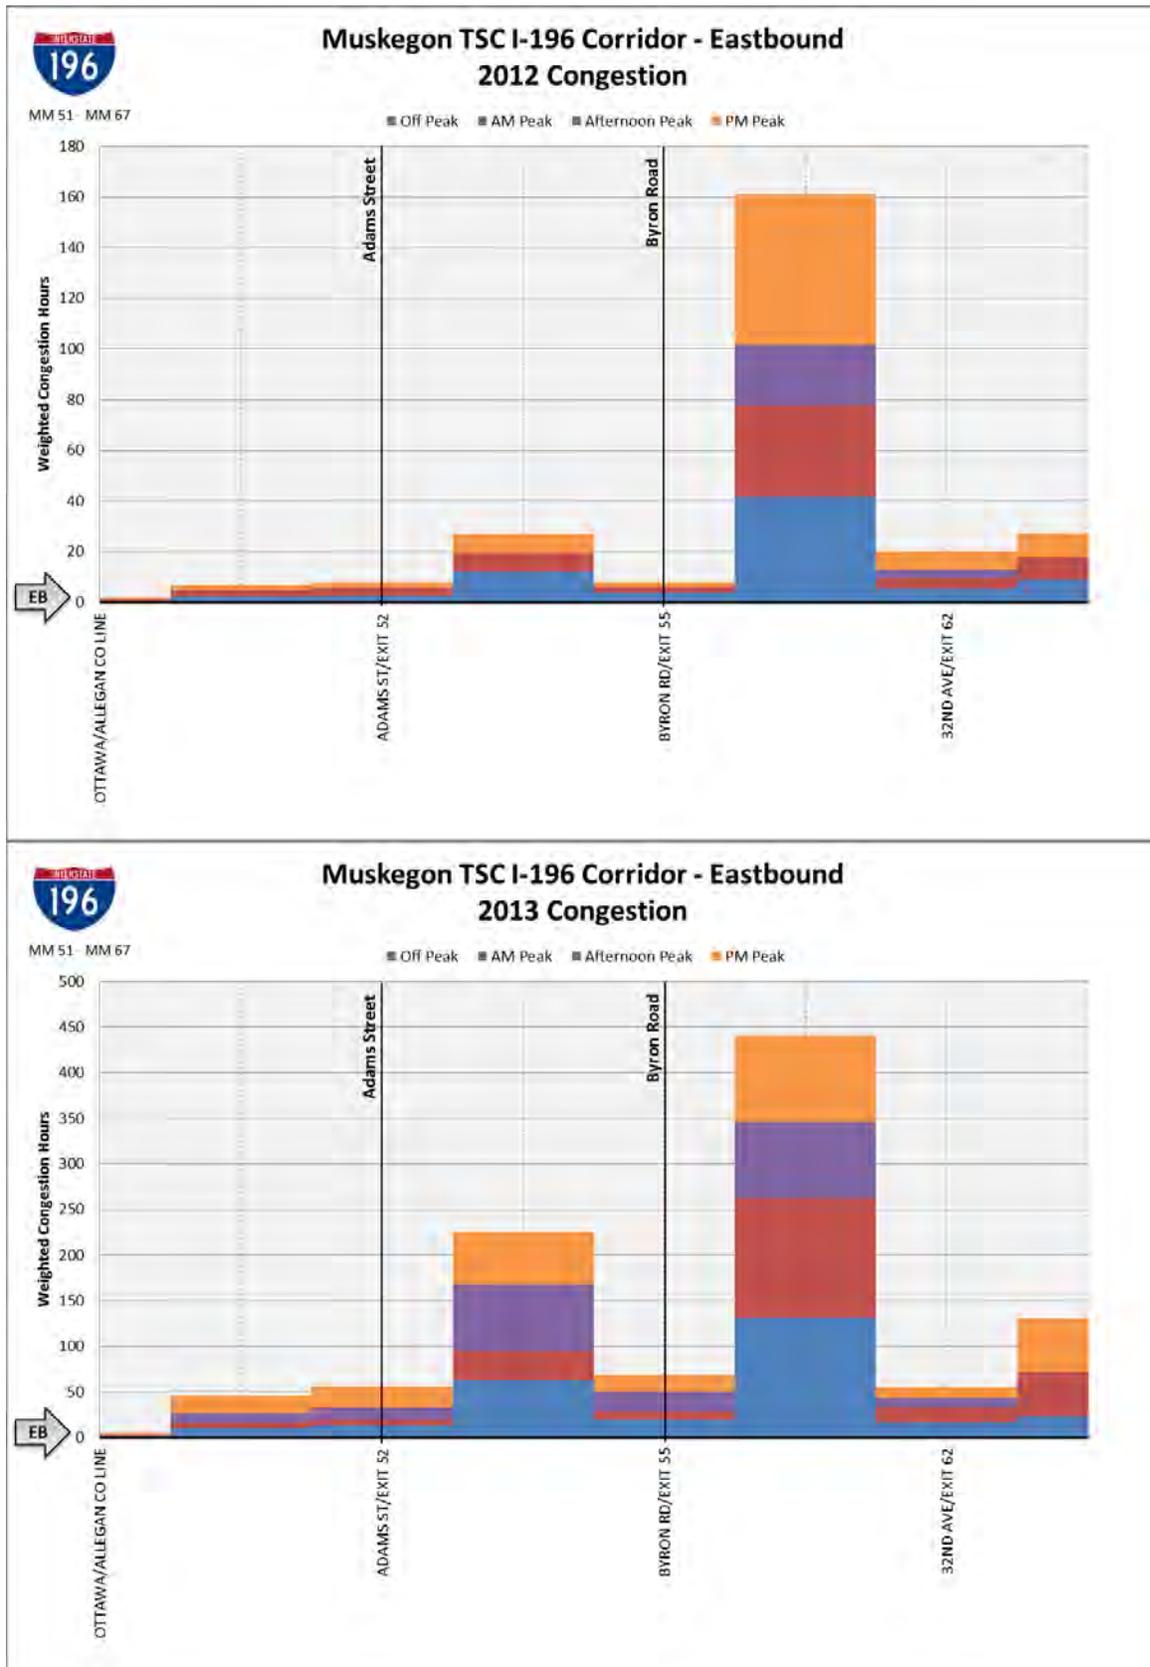


Figure 34

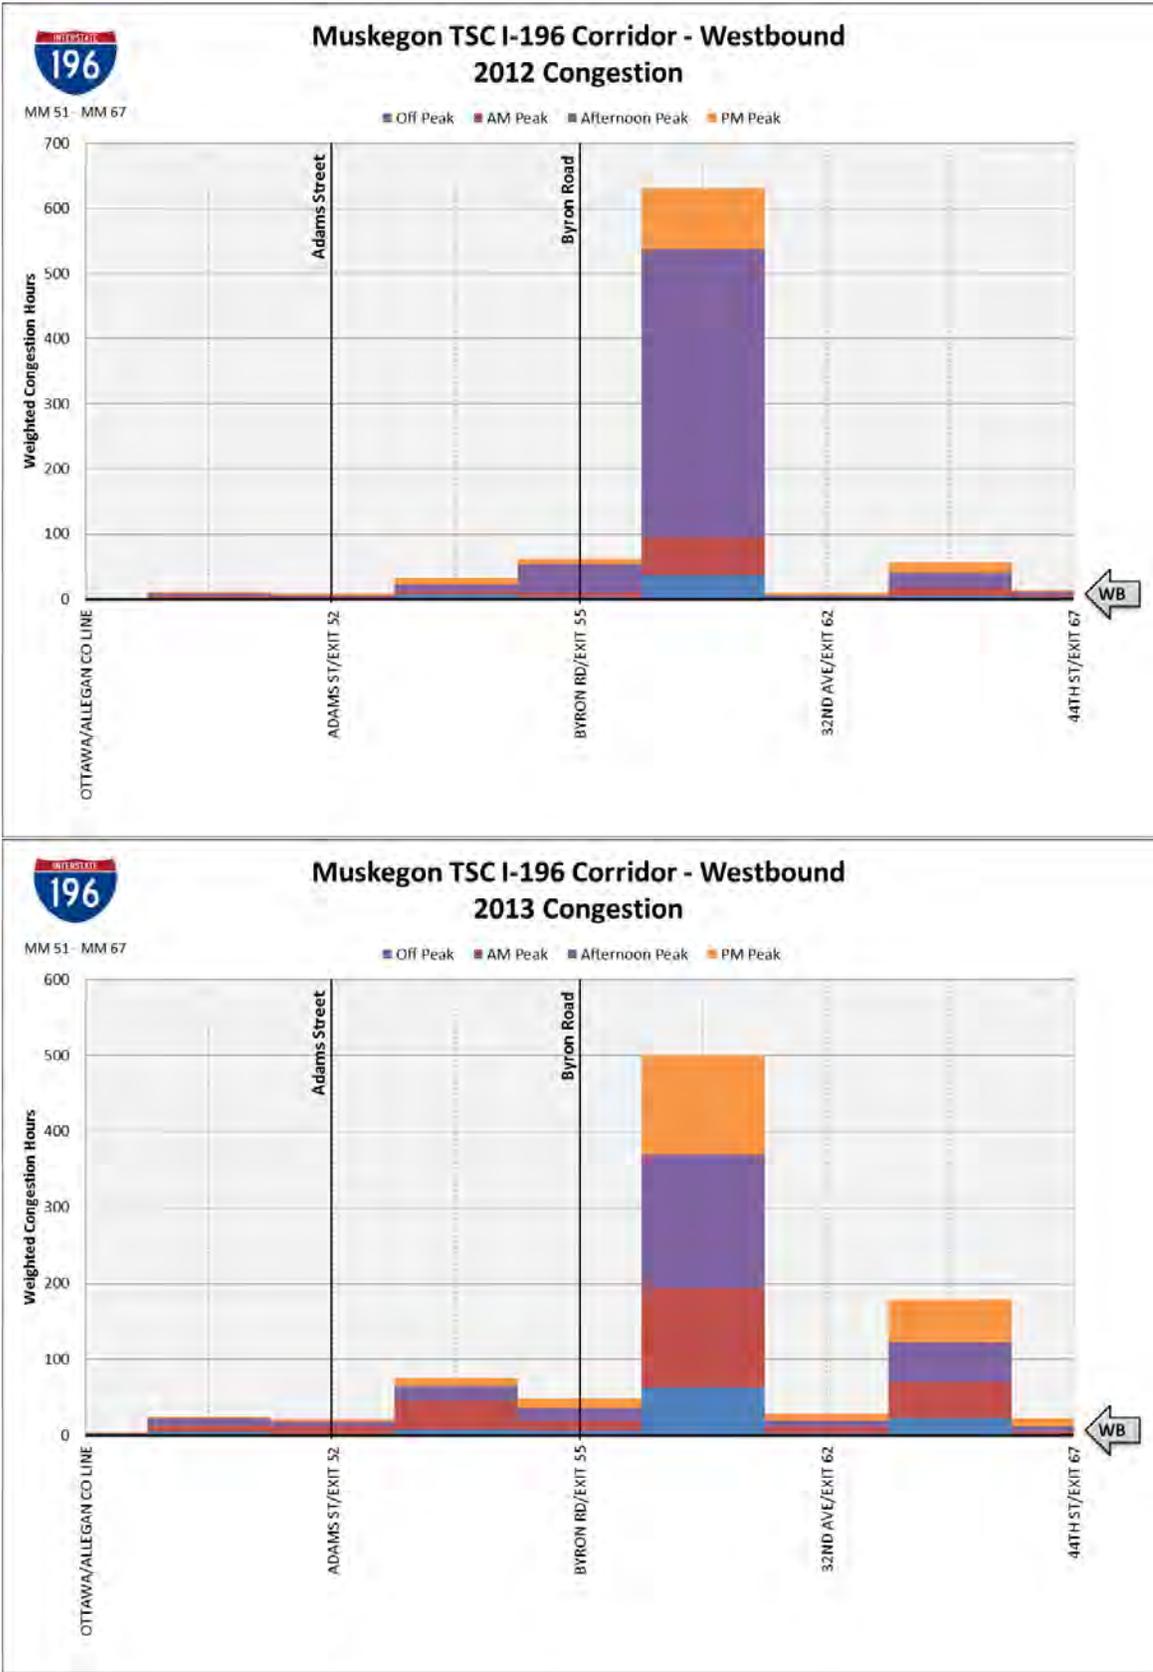


Figure 35

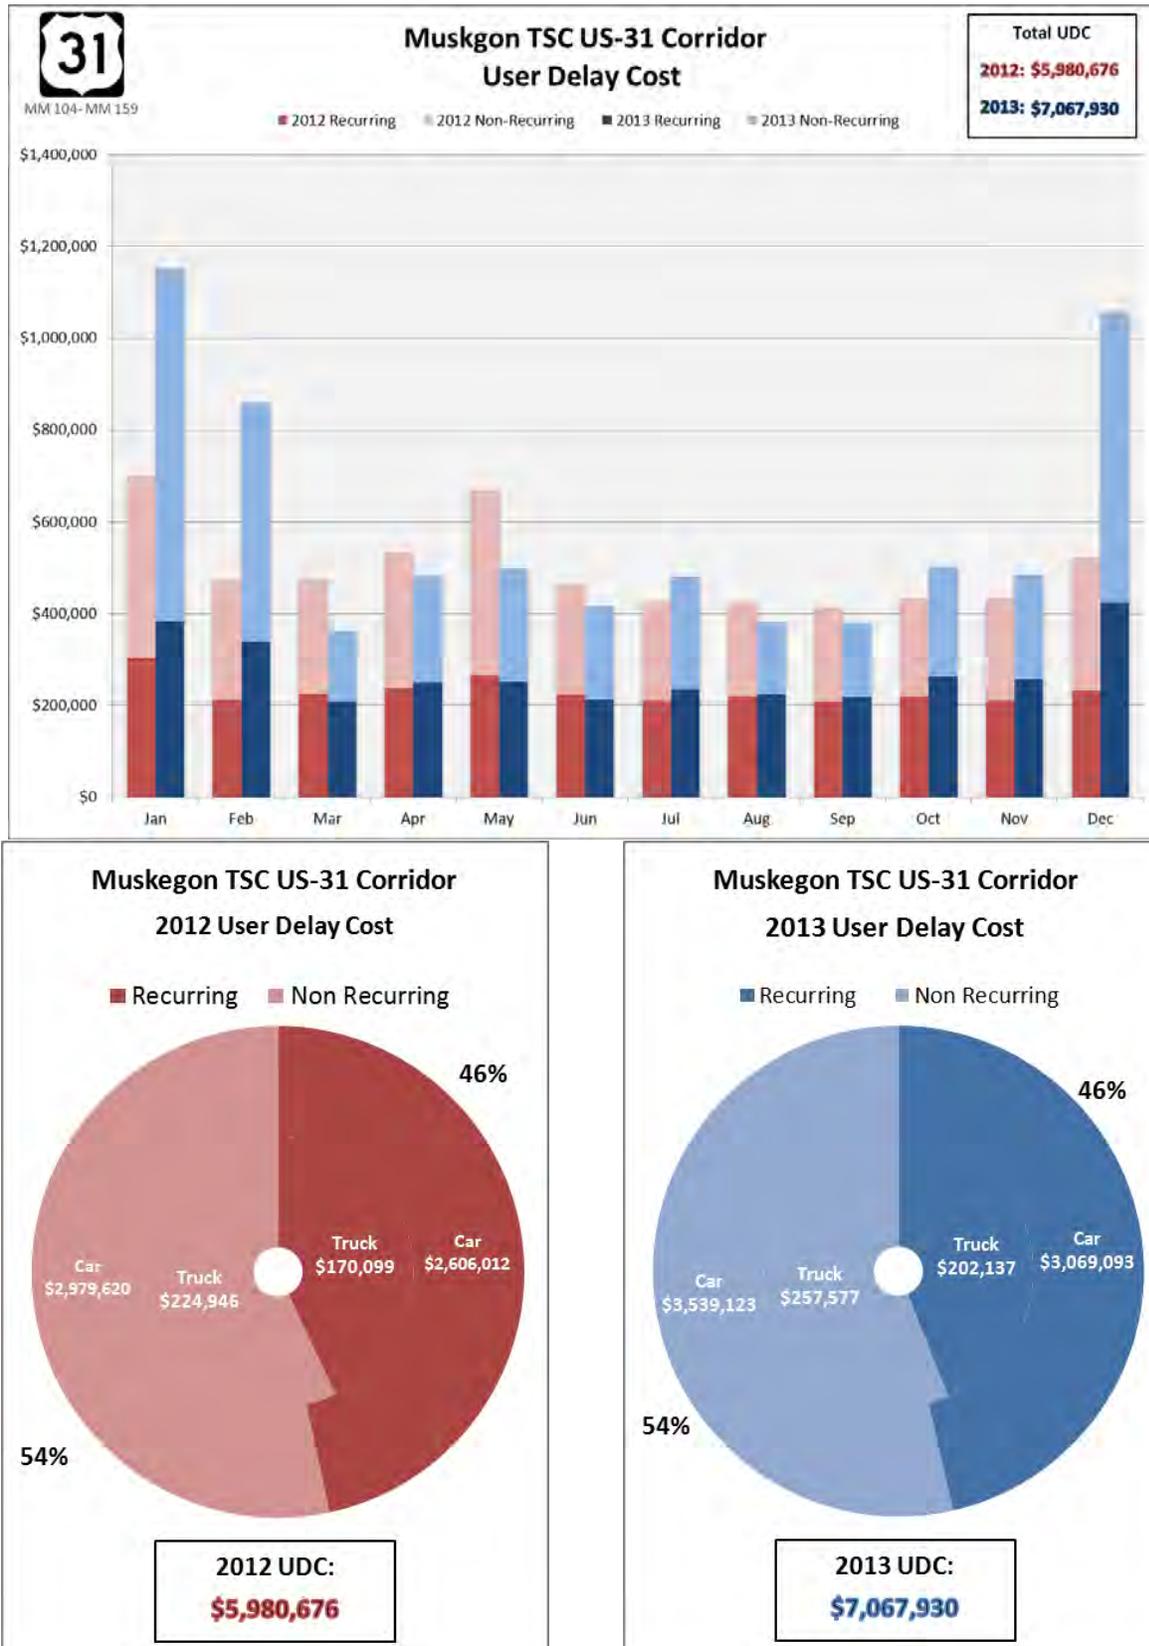


Figure 36

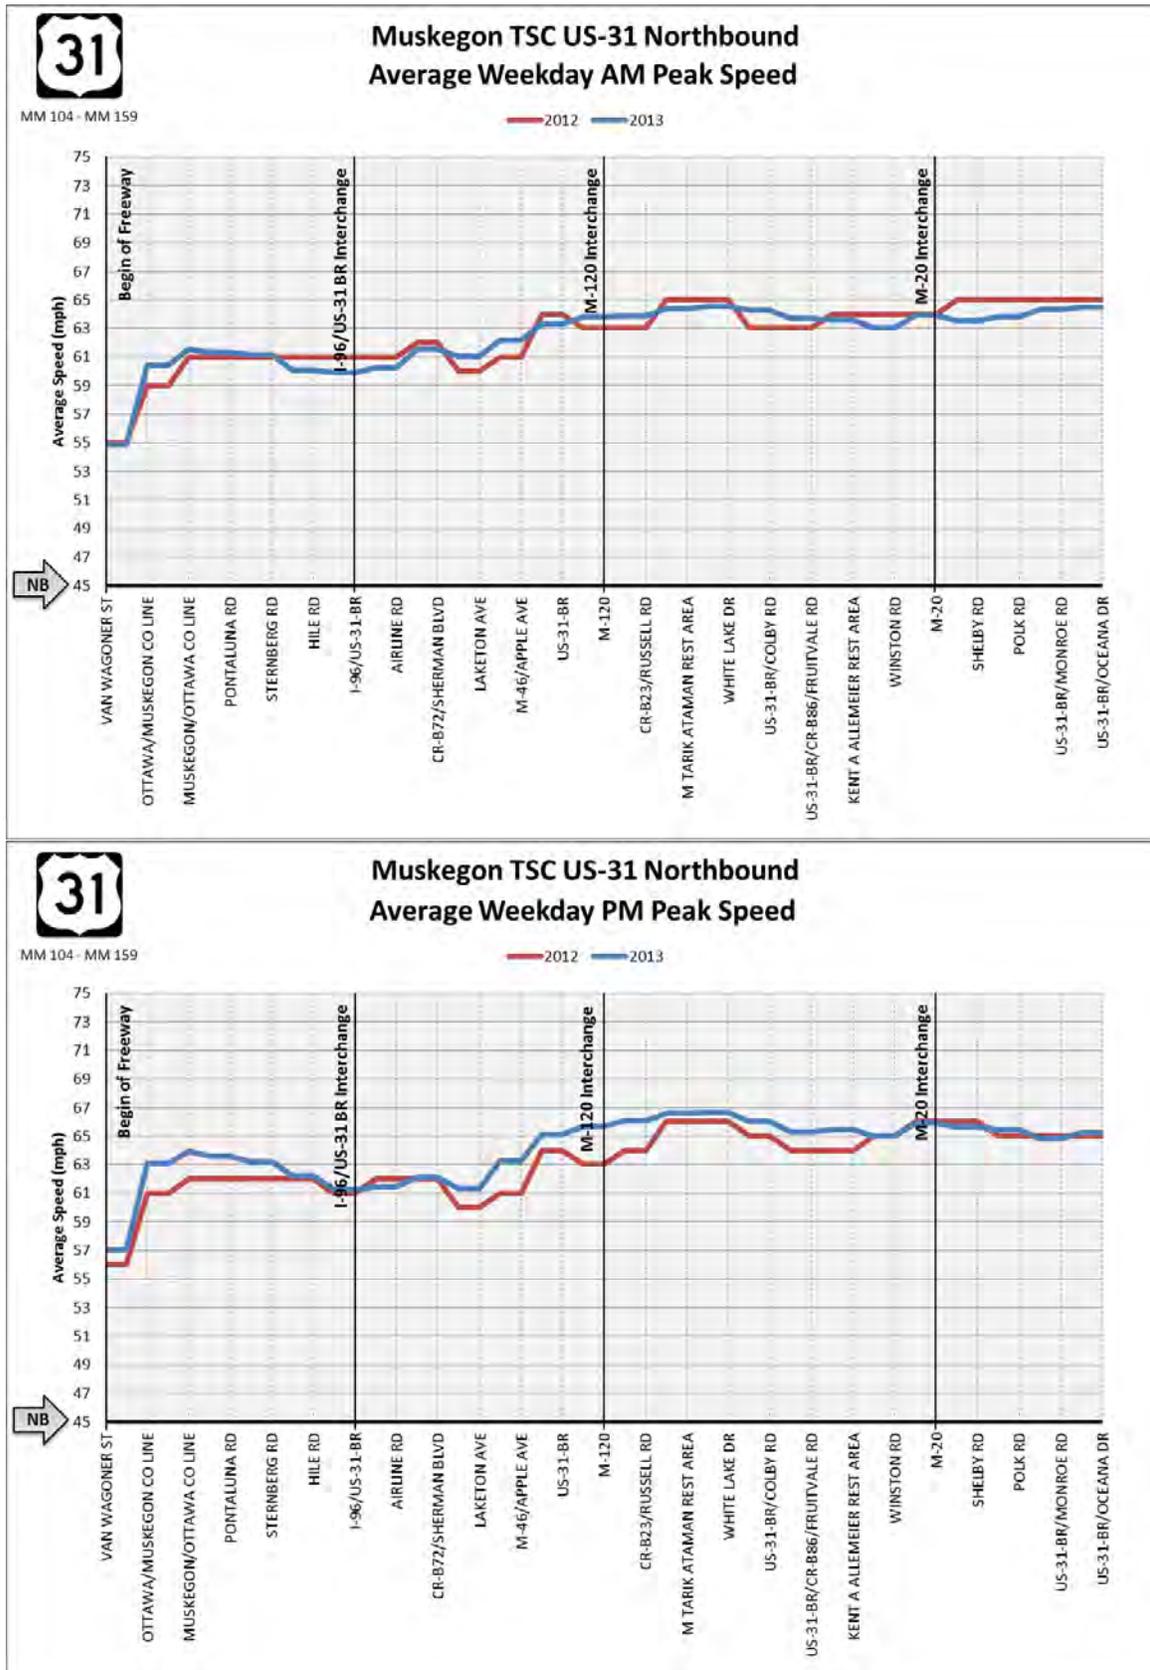


Figure 37

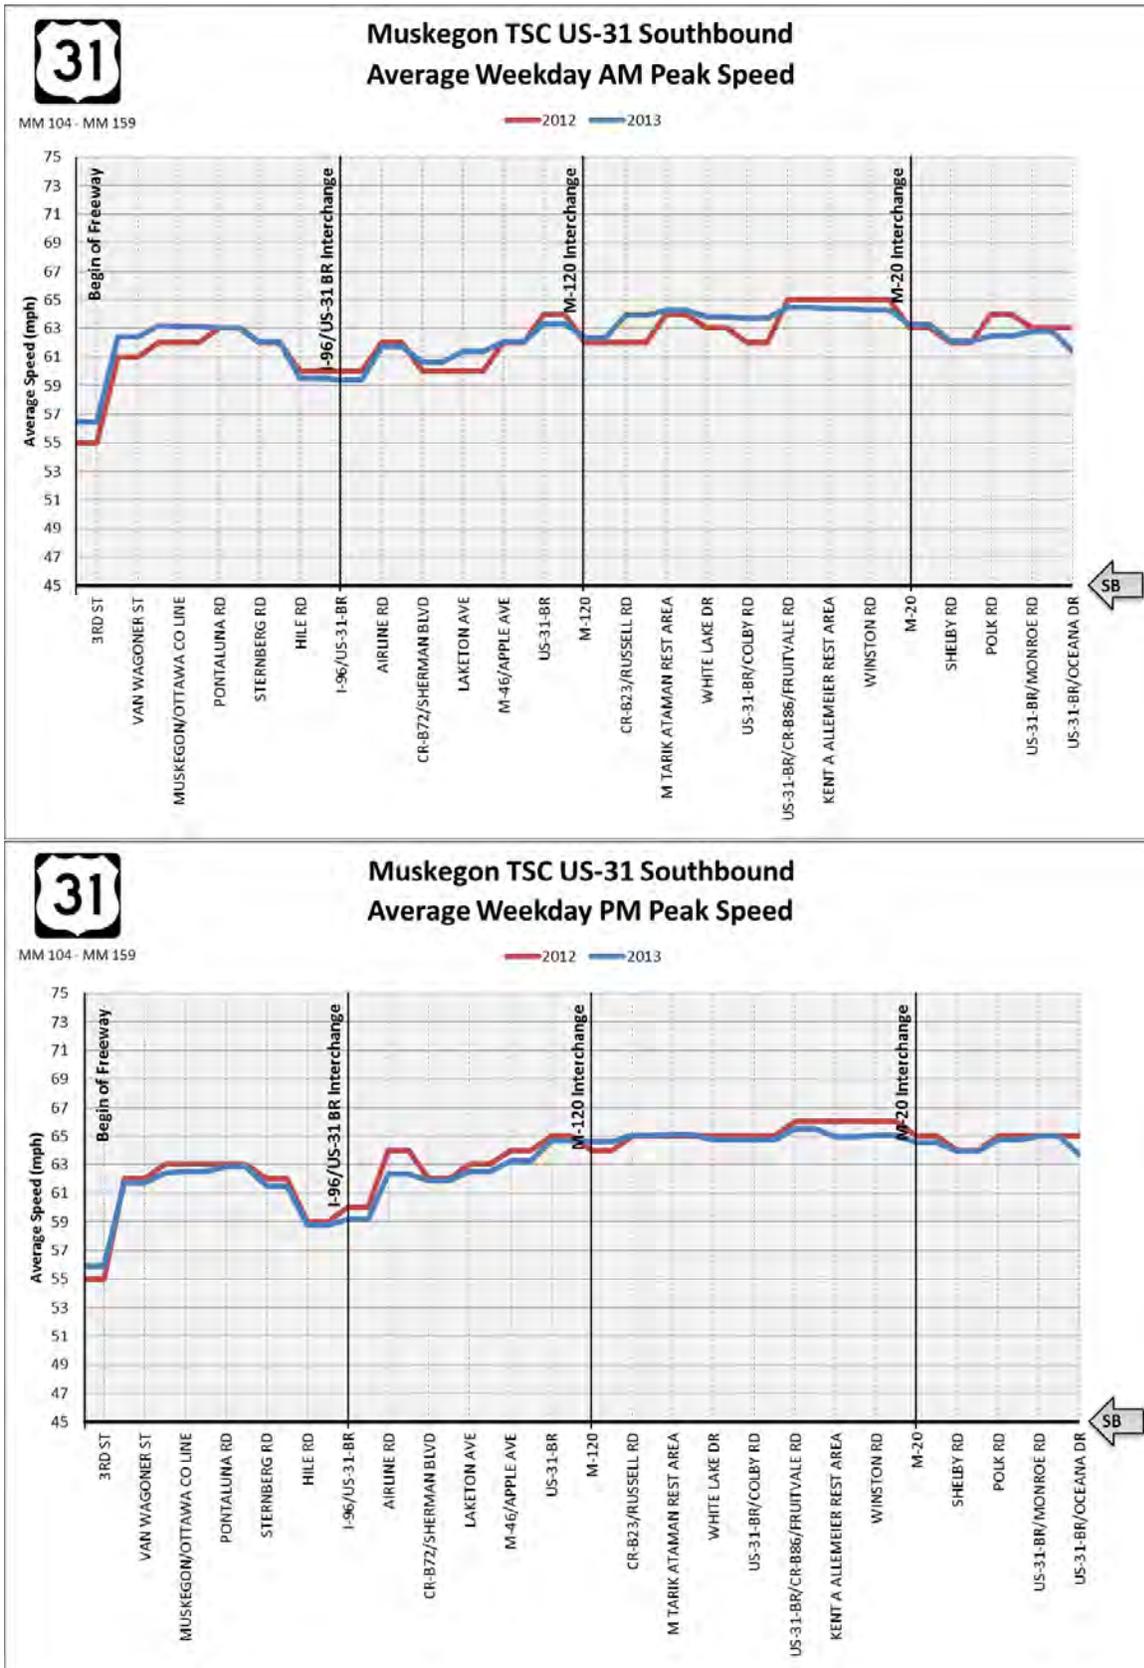


Figure 38


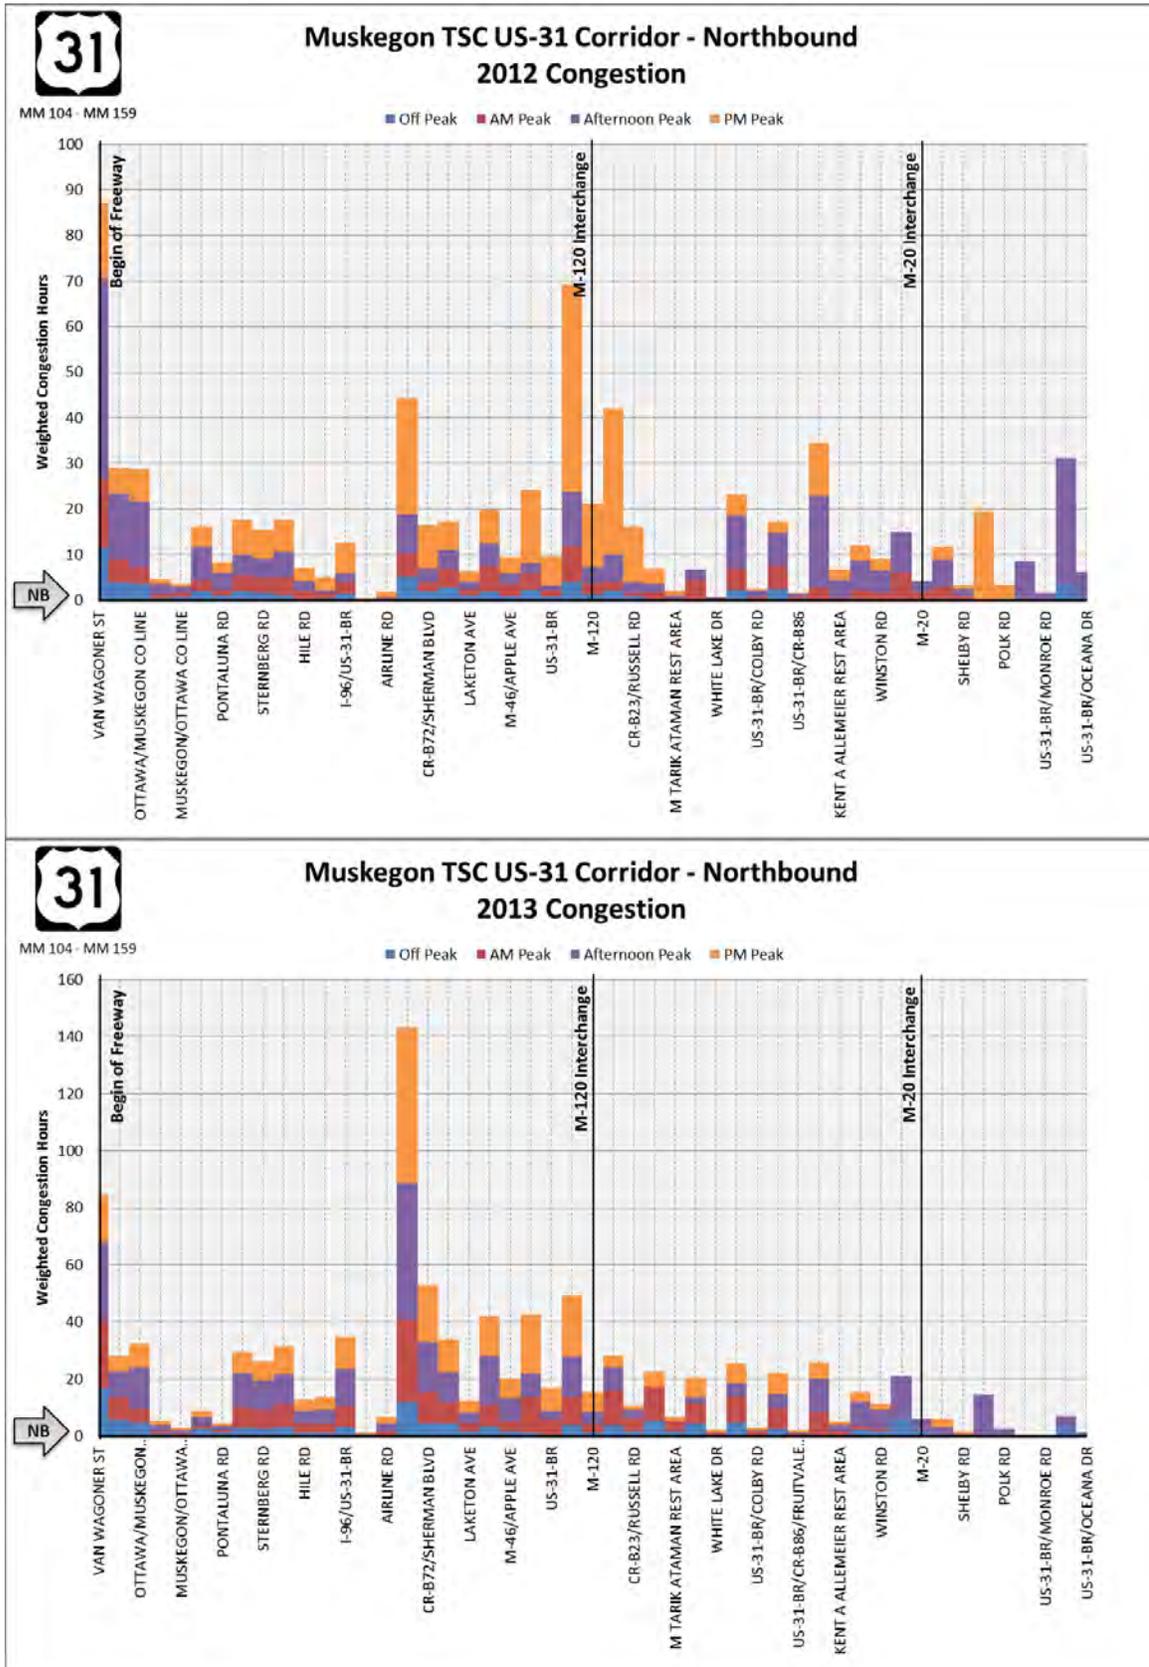


Figure 39





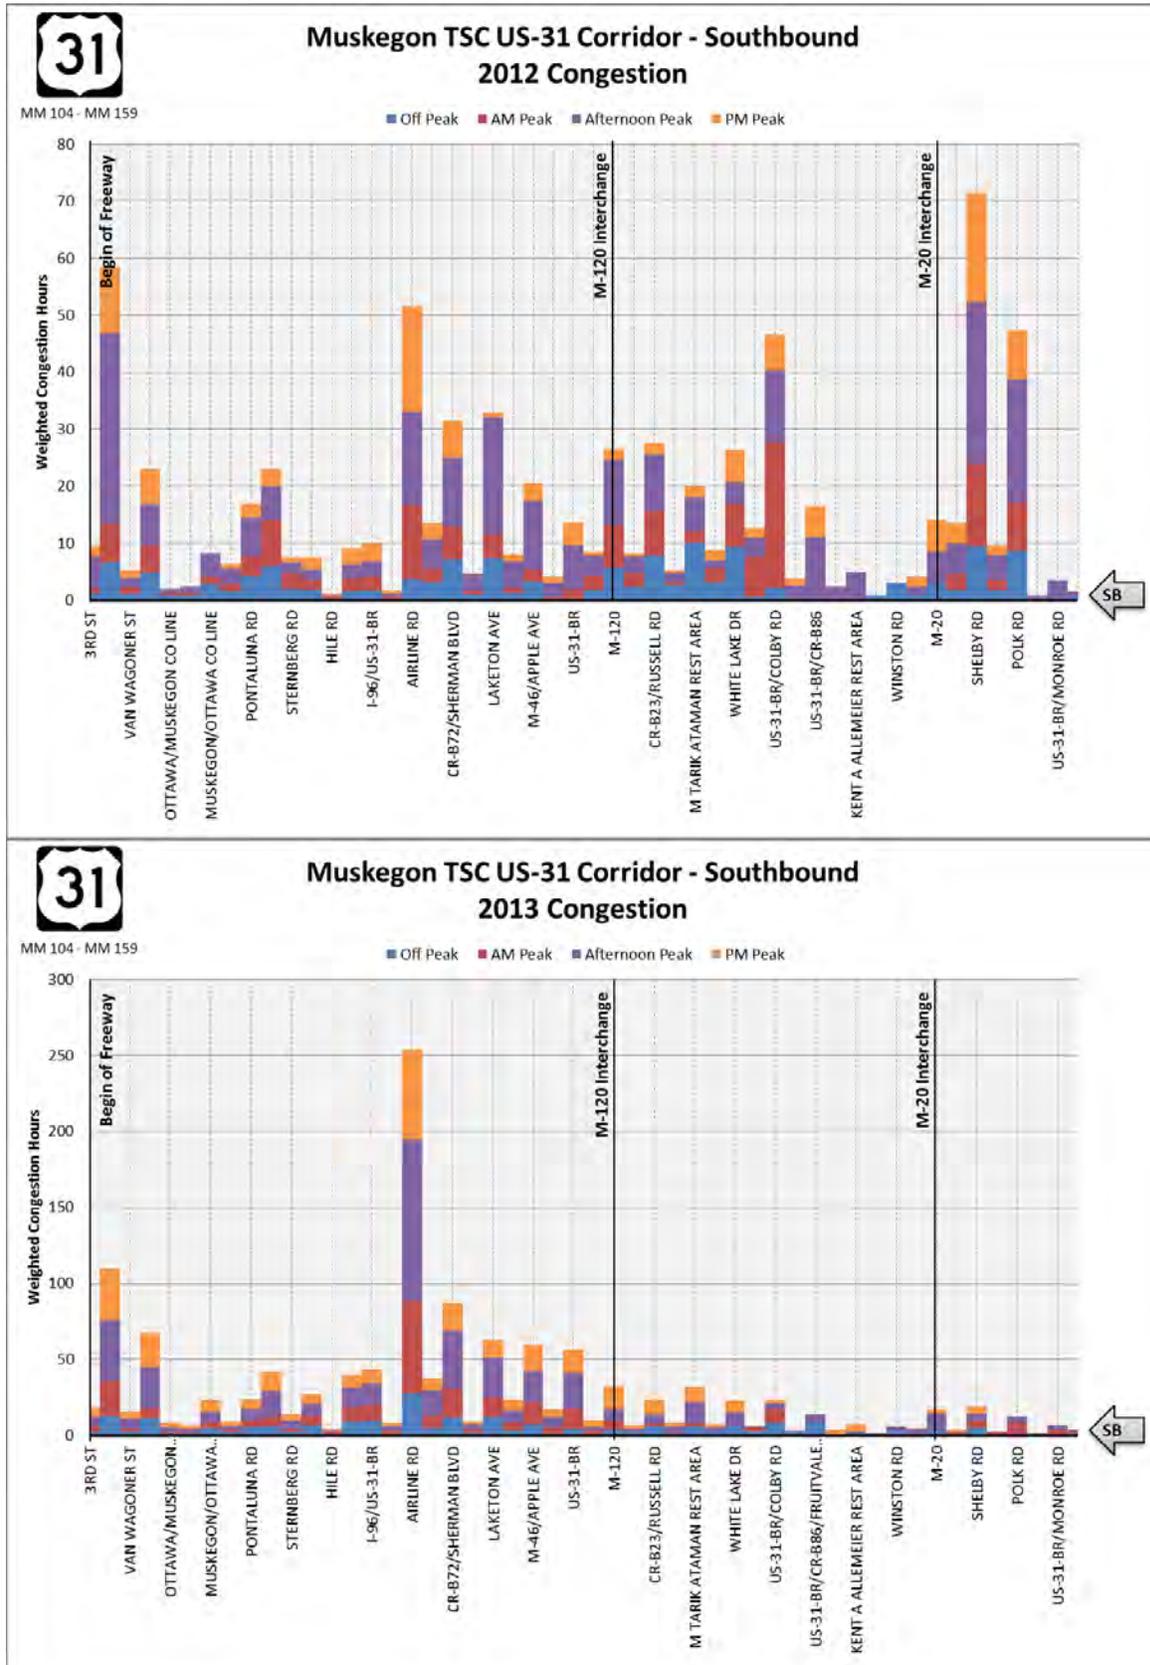

Providing the highest quality integrated transportation services for economic benefit and improved quality of life.