Make a Windmill

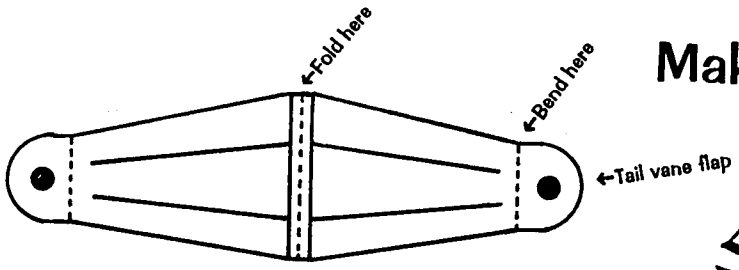

Tail Vane

1. Cut out windmill base, wind wheel, and tail vane along outside edges.
2. Fold on lines as indicated.
3. Glue or tape windmill base together along glue flap.

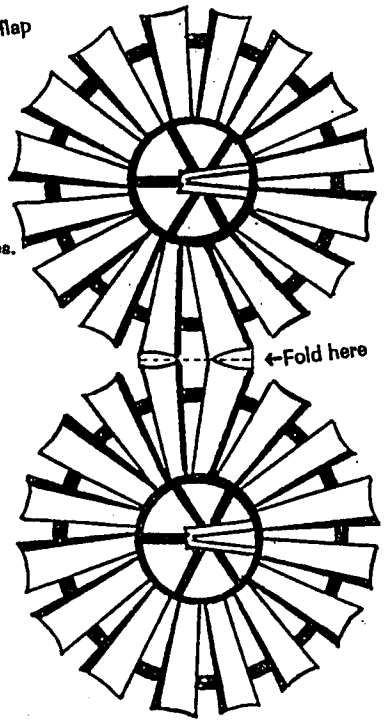

Wind Wheel

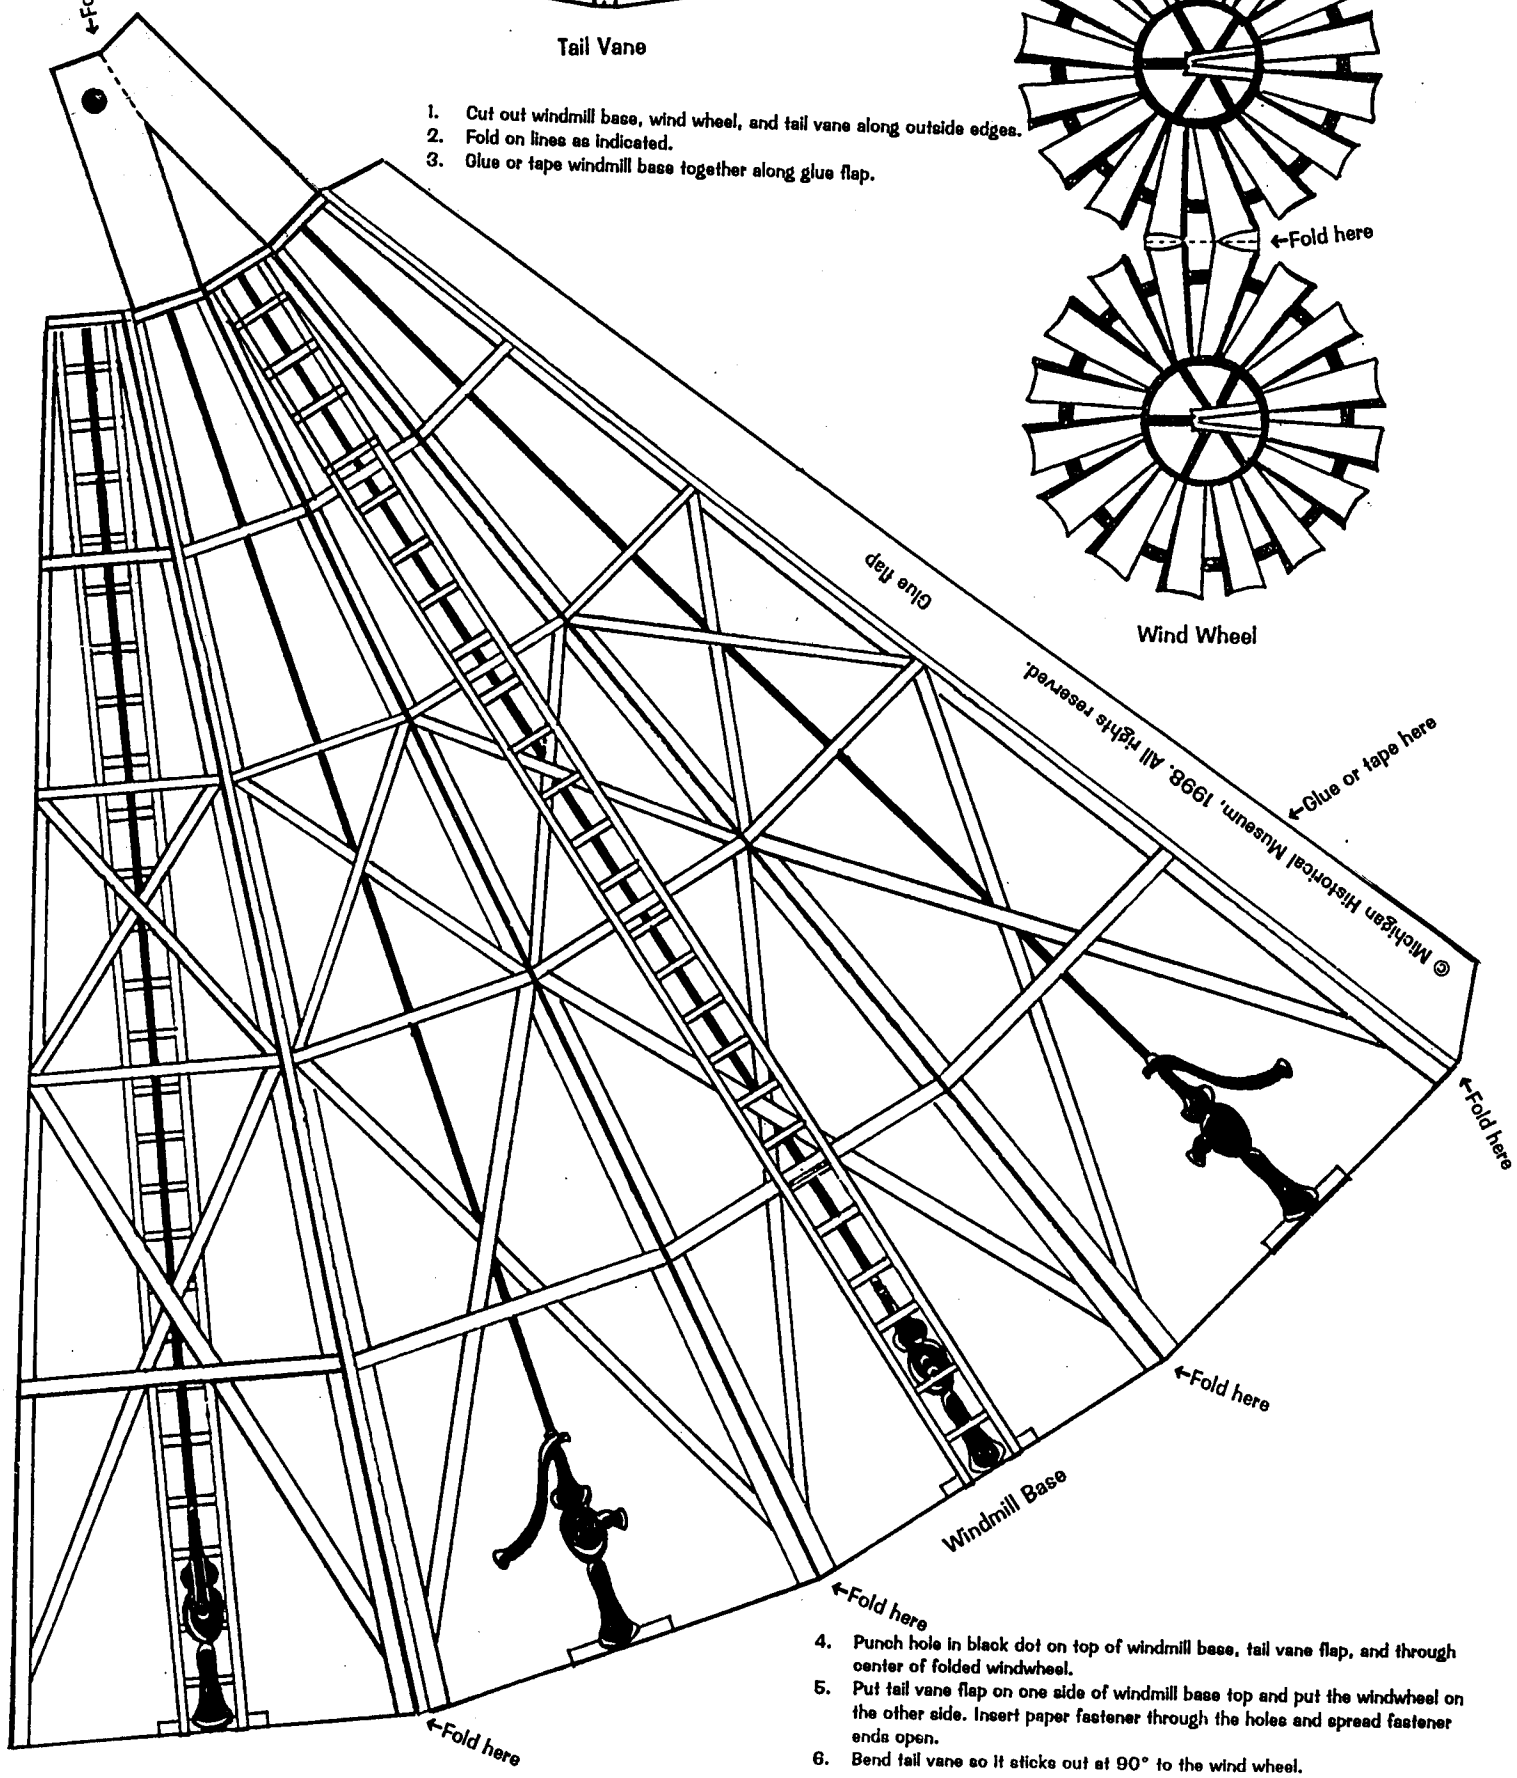

© Michigan Historical Museum, 1998. All rights reserved.

4. Punch hole in black dot on top of windmill base, tail vane flap, and through center of folded windwheel.
5. Put tail vane flap on one side of windmill base top and put the windwheel on the other side. Insert paper fastener through the holes and spread fastener ends open.
6. Bend tail vane so it sticks out at 90° to the wind wheel.