

Pall Corporation
600 South Wagner Road
Ann Arbor, MI 48103-9019

734.665.0651 phone
734.913.6114 fax
800.521.1520 toll free
www.pall.com

November 12, 2010

Ms. Sybil Kolon
Department of Natural Resources & Environment
Jackson State Office Building
301 E. Louis Glick Highway
Jackson, Michigan 49201

Re: Southwest Property/University of Michigan Saginaw Forest Property Areas

Dear Ms. Kolon:

Pall Life Sciences (PLS) has prepared the enclosed Report on Investigations of the Southwest Property/University of Michigan Saginaw Forest Property Areas.

Should you have any questions, please contact me at (734) 913-6130.

Sincerely,

Farsad Fotouhi

Farsad Fotouhi
Vice President
Corporate Environmental Engineering

cc: Ms. Celeste Gill, MDAG
Mr. Michael Caldwell
Mr. Stephen M. O'Rielly, U of M

RECEIVED
NOV 15 2010
JACKSON DISTRICT OFFICE



**Report on Investigations of the
Southwest Property/University of Michigan Saginaw Forest Property Areas**

Table of Contents

BACKGROUND	1
DATA COLLECTION	1
Boring/Well Installation	1
Water Level/Elevation Data	2
Water Quality Data	2
FINDINGS	2
Hydrogeology	2
Horizontal and Vertical Distribution of 1,4-Dioxane	5
Transport Processes	6
CONCLUSIONS AND RECOMMENDATIONS	6

LIST OF FIGURES

Figure 1 – Site Location Map

Figure 2 – Potentiometric Surface Shallow (portions of Unit C3/Southwest Property)

Figure 3 – Potentiometric Surface Deep (Unit E)

Figure 4 – Proposed Test Boring/Monitoring Well Location Map

LIST OF APPENDICES

Appendix 1 Boring Logs

Appendix 2 Elevation Data

Appendix 3 Water Quality Data

Appendix 4 Cross Sections A-A', B-B' and C-C'

BACKGROUND

This report presents findings from recent investigations by Pall Life Sciences (PLS) of the Southwest Property/Third Sister Lake Areas. The Southwest Property Area (SPA) refers to a portion of the PLS site located in the southwest portion of the Wagner Road property in the area east and south of Third Sister Lake. Third Sister Lake is on property owned by the University of Michigan (U of M) referred to as the Saginaw Forest.

PLS and the Michigan Department of Natural Resources and Environment (MDNRE) agreed to the installation of a test boring/well near the U of M Caretakers Cabin (located on the south side of Third Sister Lake). The purpose of this boring/well was to further define the extent of 1,4-dioxane in this area down to the bedrock surface. During the installation of the boring, elevated levels of 1,4-dioxane were detected in two sample intervals between 59 and 70 feet below ground surface (bgs). Furthermore, drilling conditions at this location prohibited auger penetration to bedrock. As a result, there was a portion of the Unit E aquifer that was not vertically sampled. PLS and MDNRE agreed to the drilling of another boring/well (MW-127s/d) southwest of the Caretakers Cabin that was not initially planned. This boring/well allowed for another attempt at reaching bedrock, and provided additional data to define the elevated 1,4-dioxane concentrations detected at MW-125.

Questions that remain, which become the focus of this report, are: 1) is it necessary to attempt to reach bedrock at the Caretakers Cabin and collect samples from the portion of the Unit E aquifer not previously sampled, and 2) what is the likely transport mechanism resulting in the elevated levels of 1,4-dioxane on the south side of Third Sister Lake, and 3) what additional investigations, if any, are needed to further investigate this area.

DATA COLLECTION

Boring/Well Installation

PLS recently completed drilling at two locations on the U of M property: near the Caretakers Cabin (MW-125) and approximately 750 feet southwest of the cabin (MW-127s/d). These well locations are shown on Figure 1. Boring/well construction logs for these borings/wells, including Vertical Aquifer Sampling (VAS) data, are provided in Attachment 1.

Near the Caretakers Cabin, a test boring (PLS 10-02) for MW-125 was drilled to a depth of 174 feet bgs using a hollow stem auger drilling rig. Drilling services were provided by Stearns Drilling Company. An on-site geologist was provided by Fishbeck, Thompson, Carr and Huber, Inc. The U of M had a consultant, Bureau Veritas, present during the drilling of this location and MW-127s/d. Simulprobe™ samples were collected during auger advancement through water-bearing zones. These samples were analyzed for 1,4-dioxane by PLS. Sample depth intervals and 1,4-dioxane concentrations are provided on the boring logs in Attachment 1.

MW-125 is constructed of 2-inch galvanized casing, and equipped with a 5-foot stainless steel screen completed at a depth of 65 to 70-feet bgs. This depth corresponds to the depth where the highest 1,4-dioxane concentrations were detected in Simulprobe™ sampling.

MW-127s/d were installed approximately 750 feet southwest of MW-125. A test boring was drilled to bedrock at this location to bedrock (encountered at 213 feet bgs). Drilling services were provided by Stearns Drilling Company. An on-site geologist was provided by Fishbeck, Thompson, Carr and Huber, Inc. Simulprobe™ samples were collected during auger advancement through water-bearing zones. These samples were analyzed for 1,4-dioxane by PLS. Sample depth intervals and 1,4-dioxane concentrations are provided on the boring logs in Attachment 1.

MW-127s is constructed of 2-inch galvanized casing, and equipped with a 5-foot stainless steel screen completed at a depth of 35 to 40 feet bgs. This depth interval was selected based on a review of the geological conditions at this location. MW-127d is constructed of 2-inch galvanized casing, and equipped with a 5-foot stainless steel screen completed at a depth of 195 to 200 feet bgs. This depth interval was selected based on a review of the geological conditions at this location and a detection of low-levels 1,4-dioxane in the Simulprobe™ sample from this interval.

Water Level/Elevation Data

Water levels were collected from selected Southwest Property/C₃ wells and Unit E wells. The elevation of Third Sister Lake was also surveyed by Atwell. Groundwater level data were collected on October 7, 2010 and the elevation of Third Sister Lake was measured by Atwell on October 14, 2010. All elevation data are provided in Appendix 2.

Water Quality Data

PLS performed VAS during drilling of the new wells, and collected completed well samples after the wells were installed. The samples were analyzed for 1,4-dioxane by PLS. VAS results are on the logs. Water quality data from the completed well samples are provided in Appendix 3.

Water quality data routinely collected from the Caretakers Cabin 1, 2 and 4 wells are also provided in Appendix 3.

FINDINGS

Hydrogeology

Hydrostratigraphy

Three cross sections have been prepared to show possible correlations of the hydrostratigraphy in this area. These cross sections, A-A', B-B', C-C' are shown on Figure 1 and are provided in Appendix 4. Key hydrostratigraphic features on each cross section are described below:

A to A' – This cross section runs along the southern portion of the PLS site then connects to MW-56s/d. This cross section highlights the very thick diamicton (till) sequences at both MW-68 and MW-127. These sequences are absent in the MW-56 area. Thin aquifers are present above and below the thick diamicton. These aquifers appear to be continuous between MW-68 and MW-127.

B to B' – This cross section runs south to north and shows how the Caretakers location relates to the PLS property (Core Area) and ties in on the north to MW-64. Key features of this cross section are the existence of a complex assemblage of interbedded deposits above an elevation of 840 feet NAVD88 (undifferentiated on this cross-section), the presence of what appears to be fairly continuous diamicton possibly extending from the Caretakers Cabin to the area north of the lake, underlain by a thick sand sequence (Unit E).

C to C' – This cross section runs from southwest to northeast and shows how the Caretakers cabin area relates to the SPA. This section ties in GSI-86-01, a boring drilled to bedrock on the PLS property. Key features on this cross section are the continuous diamicton sequence that separates lower sand/gravel sequences (Unit E) from a complex assemblage of interbedded deposits above an elevation of approximately 840 feet NAVD88 (undifferentiated on this cross-section). The lower sand/gravel (Unit E) thickens considerably from the area of MW-127s/d to the north east.

Vertical Groundwater Flow

There is a significant downward hydraulic potential in the area of the Caretakers Cabin. Water levels have been measured in Third Sister Lake, shallow water bearing deposits, and deep deposits in this area. Recent elevation data from these locations are provided below in Table 1.

Table 1 – Elevation Data

Location	Water Level	Date	Screen Elevation (Approximate)
Third Sister Lake	904.18	10/18/10	NA
MW-78	897.41	10/7/10	856 - 851
MW-125	885.95	10/7/10	840 - 845
Caretakers Well 1	879.43	10/7/10	785 - 781
Caretakers Well 2	879.48	10/7/10	709-717

Note: Elevation Data are in feet (NAVD88).

The water level in Third Sister Lake is almost 25 feet higher than the Unit E. The hydraulic gradient between Third Sister Lake and Unit E is approximately 0.21 feet/foot. The water level in MW-125 (shallow water-bearing zone) is 6.52 feet higher than the Caretakers Well 1 (deeper - Unit E). The vertical hydraulic gradient in Unit E is slightly upward but very minimal, suggesting mostly horizontal flow in this zone.

The significant head difference between Third Sister Lake and the groundwater suggests the lake and the groundwater is not in good communication (otherwise, the head in the shallow zone would be closer to the lake level). It is possible that Third Sister Lake, with its high water level, “pushes” water in the shallow water bearing zones away from it. This may result in groundwater flowing west from the PLS site to “bifurcate”, with a portion of the groundwater in the SPA flowing around the lake to the south.

Horizontal Groundwater Flow – Shallow (Southwest Property/Unit C3)

Water level data were collected from selected Southwest Property/C3 wells. A potentiometric surface map was prepared using the data and is presented as Figure 2.

The lowest hydraulic heads in the area of the Caretakers Cabin are in the area of the SPA. Groundwater levels in the SPA have been lowered due to groundwater extraction. The highest heads in the shallower water-bearing zone are currently in the area to the south of Third Sister Lake (MW-125 and MW-127s). Groundwater in the shallow from the Caretakers Cabin area is interpreted to flow toward the SPA. There is also a potential for groundwater in the Caretakers Cabin area to flow to the west.

Prior to extraction in the SPA, there were no wells in the shallower zone near the Caretakers Cabin. As such, it is not known how the gradients changed over time between this area and SPA since extraction began.

Horizontal Groundwater Flow – Deep (Unit E)

A potentiometric surface map for a portion of the Unit E on the West side of Wagner Road is provided as Figure 3. This map is consistent with previous interpretations made of the Unit E aquifer. Groundwater flow from the Saginaw Forest area is to the north and east. The hydraulic head in MW-127d is similar to (slightly lower – 0.39 feet) than the Caretakers 1 and 2 wells. This is likely due to the considerable thinning of the aquifer in this direction, and not an indication that groundwater flow is toward MW-127d from the Caretakers well locations.

Horizontal and Vertical Distribution of 1,4-Dioxane

Shallow – Southwest Property/Unit C3

Water bearing zones from ground surface to a depth of 170 feet were sampled during the drilling of MW-125. 1,4-Dioxane was not detected until the 49-50.5 feet bgs sample. The 1,4-dioxane concentration in this sample was 45 µg/L. A Simulprobe™ sample was collected from a depth of 59-60.5 feet. This sample had a concentration of 439 µg/L. A diamicton was encountered from approximately 60-66 feet bgs. From 66-72 feet bgs, sand was encountered. A Simulprobe™ sample collected in this sand from 69-70.5 feet bgs had a 1,4-dioxane concentration of 461 µg/L.

MW-125 was installed at depth (65-70 feet bgs) which generally corresponded to the highest 1,4-dioxane concentrations at the boring. A groundwater sample collected from MW-125 on September 13, 2010 had a 1,4-dioxane concentration of 801 µg/L. Another sample collected from the well on October 18, 2010 had a lower concentration of 229 µg/L. The reason for this difference is unknown. Routine monitoring well help establish a water quality trend over time.

Elevated 1,4-dioxane concentrations in the MW-125 boring are present from a depth of 59-70.5 feet bgs. Below this interval, a 40 foot thick diamicton (till) is encountered. Hydrostratigraphic cross sections suggest this fine-textured deposit has continuity in this area to the south, north and east. This deposit appears to be limiting, but not eliminating, the downward transfer of 1,4-dioxane in this area.

1,4-Dioxane was not detected in a shallow water bearing zone at MW-127s. The head at MW-127s is also considerably higher than at MW-125. How these two well completion zones correlate is not clear, however, there was only one shallower water bearing zone at MW-127. As such, the shallow contaminated zone found at MW-125 is either not present at MW-127, or at a much higher head. As such, MW-127 adequately defines the extent of 1,4-dioxane in this area. 1,4-Dioxane has also been absent in groundwater samples collected from the Saginaw Forest supply well installed closer to Liberty, further defining the extent of 1,4-dioxane to the south.

Deep – Unit E

1,4-Dioxane is present in the Unit E at the Caretakers Cabin in the Caretakers 1 and 2 wells, and in Simulprobe™ samples collected at the MW-125 location. Groundwater quality data from Caretakers 1 well has been monitored since 1999, and groundwater from the Caretakers 2 well has been monitored since it was installed in January of 2001. Data from these wells is provided in Appendix 3.

In both wells, 1,4-dioxane levels appear to have peaked in the Fall of 2005. 1,4-Dioxane levels have consistently been higher in the Caretaker 1 (shallower) well than in Caretaker 2 (deeper) well.

1,4-Dioxane concentrations in Simulprobe™ samples collected during the drilling of MW-125 ranged from 16 to 68 µg/L. These concentrations are generally consistent with those observed in groundwater samples from the Caretakers 1 well. 1,4-Dioxane concentrations appeared to increase with depth. PLS believes this observation is related to the longer time frame it took to collect samples deeper in the aquifer (delays in drilling through difficult formation allowing more time for borehole fluids to exchange with the sample zone).

Between the last Simulprobe™ sample collected (169-170 feet bgs) and the Caretakers 2 well screen (196 to 240 feet bgs), there is approximately 26 feet of aquifer from which Simulprobe™ samples were not collected. This represents approximately 28 percent of the total aquifer thickness.

1,4-Dioxane was detected at a concentration of 2 µg/L in a Simulprobe™ sample collected from Unit E during the drilling of MW-127. A groundwater sample was collected from MW-127d on October 18, 2010 and analyzed for 1,4-dioxane. This sample was non-detect for 1,4-dioxane. This is consistent with water level data which indicates this well is hydraulically upgradient of the Caretakers Well area. MW-127d places a clear southern horizontal boundary of 1,4-dioxane in the Unit E in the Saginaw Forest area.

Transport Processes

Shallow

PLS believes that the most probable mechanism for 1,4-dioxane to migrate toward MW-125 is historic migration driven by historically higher hydraulic heads in the SPA. This potential has diminished or eliminated with extraction in the SPA which have lowered heads in this area considerably. It's difficult to determine how long 1,4-dioxane migrated along the south side of Third Sister Lake.

It is possible that some 1,4-dioxane has migrated to the west/northwest beyond the capture of the SPA extraction wells. Elevated levels of 1,4-dioxane have not been detected at MW-28 or MW-44. Elevated

1,4-dioxane has been detected at MW-56s. It's possible that there is a connection between the Caretakers Cabin area and this well location. If that were the case, fate of 1,4-dioxane from the Caretakers area would be no different than the remainder of the 1,4-dioxane in the area west of Wagner Road (except the Western System). That is, the 1,4-dioxane would migrate generally downward, and/or to the east north east.

Deep - Unit E

1,4-Dioxane in Unit E in the Caretakers Cabin area is believed to be the result of the downward vertical migration of 1,4-dioxane from the shallower water-bearing zone. There is a high vertical gradient between the shallow and deeper zones. Under such conditions and given sufficient time, it is reasonable that 1,4-dioxane could have migrated through the fine-textured deposits separating these zones. Higher 1,4-dioxane concentrations in the Caretaker 1 well (shallower) than Caretaker 2 well is consistent with the transfer of 1,4-dioxane downward from the shallower zone.

CONCLUSIONS AND RECOMMENDATIONS

Based on the investigations conducted by PLS, the following conclusions and recommendations are provided:

1. The most probable transport process for 1,4-dioxane entering the deeper (Unit E) zone in the area of the Caretakers Cabin is the downward migration of 1,4-dioxane from shallow water-bearing zones, promoted by the strong downward hydraulic gradient in this area.

Horizontal groundwater flow in the Unit E is to the north and east from the Caretakers Cabin area (toward the Prohibition Zone). This is consistent with the fact that the Unit E thins to the south as indicated by data from the MW-127 cluster and MW-68, and the fact that 1,4-dioxane concentrations are low or non-detect in these wells. Based on these findings, PLS concludes that the southern extent of 1,4-dioxane in the Unit E is adequately defined. The Unit E plume is also very well defined to the west with the MW-62 and MW-63 well clusters.

PLS sees no value to attempting the collection of additional vertical aquifer samples at the Caretakers well location. 1,4-Dioxane concentrations at this location are already known to exceed 85 µg/L in a thin shallow zone above the Unit E and there are no data to support further expansion of the Unit E plume to the south or west.

2. 1,4-Dioxane in the shallower aquifer has migrated west of the PLS property in thin water-bearing zone and relatively high concentrations. It is likely that this migration occurred prior to the initiation of extraction in the SPA.

The extent of this 1,4-dioxane has been adequately defined to the southwest by MW-127s. The potential exists that a portion of the plume has migrated west/north west beyond MW-125.

Access to drilling locations in the Saginaw Forest is very difficult. This area is a forestry research station. As such, cutting trees for rig access is very undesirable. PLS recognizes the need for further definition of the contamination detected at MW-125. PLS is proposing the installation of a monitoring well west of MW-125 at the location shown on Figure 4.



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-125 (PLS-10-02)

TOTAL DEPTH (ft.): 175'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Todd C. Campbell, CPG


START DATE: 8/25/2010
END DATE: 8/31/2010
TOC ELEV.: 909.97' NAVD 88
GROUND ELEV.: approx. 910.5'
STATIC WATER LVL.: 25.8' bgs

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Dan, Pat
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N 42.27480, W083.80584, acc. 20'. Saginaw Forest, west of MW-78
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 1 of 4

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/ Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

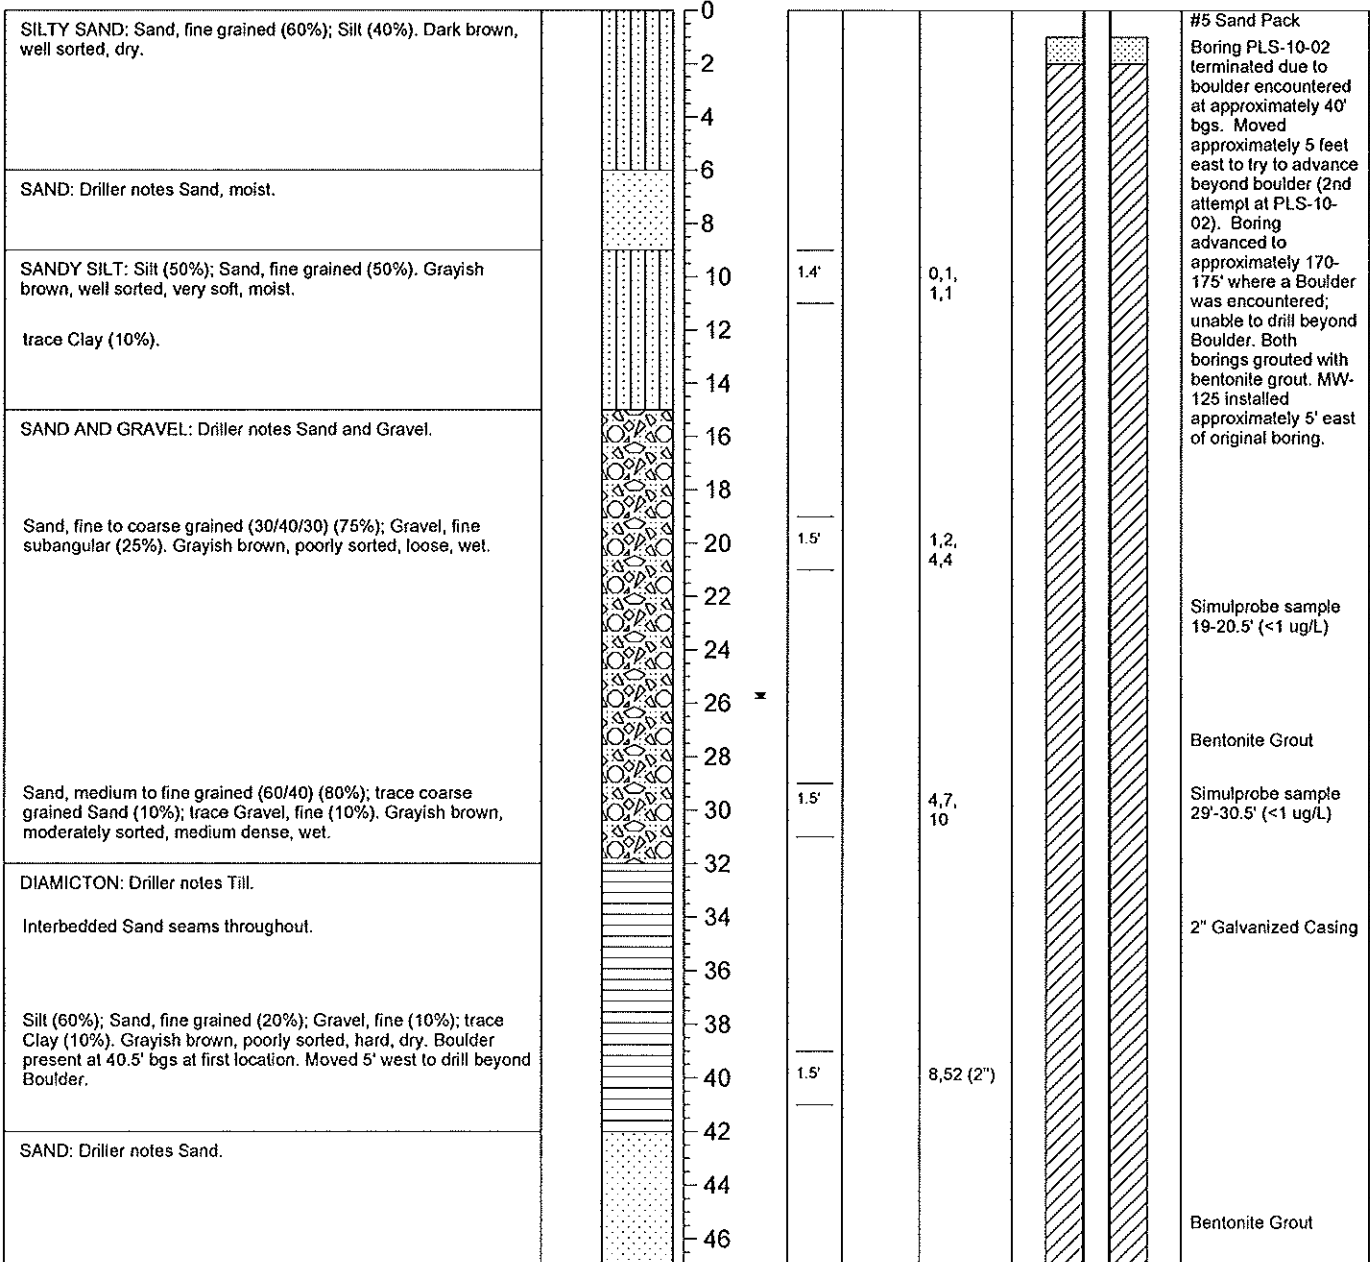



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-125 (PLS-10-02)

TOTAL DEPTH (ft.): 175'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Todd C. Campbell, CPG

START DATE: 8/25/2010
END DATE: 8/31/2010
TOC ELEV.: 909.97' NAVD 88
GROUND ELEV.: approx. 910.5'
STATIC WATER LVL.: 25.8' bgs

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Dan, Pat
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N 42.27480, W083.80584, acc. 20'. Saginaw Forest, west of MW-78
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 2 of 4

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/ Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

<p>SAND AND GRAVEL: Sand, coarse to fine grained (60/30/10) (70%); Gravel, fine (30%), subrounded. Grayish brown, moderately sorted, dense, wet.</p>			48					
			50	0.8'			12,21, 21,19	Simulprobe sample 49'-50.5' (45 ug/L)
<p>DIAMICTON: Silt (60%); Sand, fine grained (20%); trace Clay (10%); trace Gravel, fine (10%). Grayish brown, poorly sorted, moist.</p> <p>Interbedded Sand seams throughout.</p>			52					
			54					2" Galvanized Casing
<p>SAND: Driller notes Sand.</p> <p>Sand, medium to fine grained (70/30) (90%); trace Silt (10%). Grayish brown, well sorted, medium dense, wet.</p>			56					
			58					Simulprobe sample 59'-60.5' (439 ug/L)
<p>DIAMICTON: Driller notes Till.</p> <p>Silt (50%); Sand, fine to medium grained (70/30) (20%); Clay (20%); Gravel, fine (10%). Grayish brown, poorly sorted, hard, moist.</p>			60	0.5'				
			62				10,12, 12	#5 Sand Pack
<p>Silt (70%); Clay (20%); trace Sand, fine (10%). Grayish brown, moderately sorted, hard, dry.</p> <p>Silty Sand Seam</p>			64					
			66				8,9, 9	2" Stainless Steel Screen (10 slot) Screened Between 65 and 70 Feet Below Ground Surface
			68	1.5'			Simulprobe sample 69'-70.5' (461 ug/L)	
			70					
			72					
			74					
			76					
			78					
			80	0.2'				
			82				28,41, 37,38	Added approx. 20 gallons of water to augers
			84					
			86					
			88					
			90	1.2'				
			92				8,13, 32,74	
			94					



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-125 (PLS-10-02)

TOTAL DEPTH (ft.): 175'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Todd C. Campbell, CPG

START DATE: 8/25/2010
END DATE: 8/31/2010
TOC ELEV.: 909.97' NAVD 88
GROUND ELEV.: approx. 910.5'
STATIC WATER LVL.: 25.8' bgs

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Dan, Pat
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N 42.27480, W083.80584, acc. 20'. Saginaw Forest, west of MW-78
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 3 of 4

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	-----------------	-----------	-------------	--------------------------

Silt (50%), Sand, fine grained (30%); Gravel, fine (10%); trace Clay. Grayish brown, moderately sorted, hard, dry.			94					
as above.			96					
			98					
			100	1.3'			10,28, 75 (5')	
			102					
			104					
			106					
			108					
			110	2.0'			11,27, 50 (4')	
SAND: Sand, fine to coarse grained (30/40/30) (60%); Gravel, fine (20%); Silt (20%). Grayish brown, poorly sorted, very dense, wet.			112					
			114					
			116					
			118					
			120	0.5'			22, 75 (6')	Simulprobe sample 119'-120.5' (31 ug/L)
DIAMICTON: Silt (60%); Sand, fine grained (20%); trace Clay (10%); trace Gravel, fine (10%). Grayish brown, poorly sorted, moist.			122					
SAND: Driller notes Sand and Gravel.			124					
			126					
			128					
Gravel, fine to coarse (70%); Sand, coarse to fine grained (30%). Grayish brown, poorly sorted, very dense, wet.			130	0.2'			27,100	Simulprobe sample 129'-130.5' (28 ug/L)
			132					
			134					
Cobbles throughout.			136					
			138					
Sand, coarse to medium grained (80/20) (80%); Gravel, fine, subangular to subrounded (10%); trace Silt (10%). Grayish brown, poorly sorted, very dense, wet.			140	0.8'			41,39, 70	Simulprobe sample 139'-140.5' (16 ug/L)



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-125 (PLS-10-02)

TOTAL DEPTH (ft.): 175'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Todd C. Campbell, CPG

START DATE: 8/25/2010
END DATE: 8/31/2010
TOC ELEV.: 909.97' NAVD 88
GROUND ELEV.: approx. 910.5'
STATIC WATER LVL.: 25.8' bgs

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Dan, Pat
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N 42.27480, W083.80584, acc. 20'. Saginaw Forest, west of MW-78
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 4 of 4

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sampler Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

Cobbles throughout.			142					Added approx. 20 gallons of water to augers
			144					
Sand, coarse to fine grained (30/50/20) (60%); Gravel, fine to coarse (30%); trace Silt (10%). Grayish brown, poorly sorted, very dense, wet.			146					Simulprobe sample 149'-150.5' (20 ug/L)
			148					
			150	1.0'	23,49, 46			
			152					
Coarse gravel throughout.			154					Simulprobe sample 159'-160' (66 ug/L)
			156					
Cobbles/Boulders throughout with possible Till seams throughout.			158					
			160	0.5'	125 (6")			
Sand and Gravel as above with Boulder encountered at 170'.			162					Simulprobe sample 169'-170' (68 ug/L)
			164					
			166					
			168	1.0'	18, 75 (5")			
			170					Added approx. 10 gallons of water to augers
			172					
			174					



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-127s

TOTAL DEPTH (ft.): 40'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Brad Peuler, CPG/Todd C. Campbell, CPG


START DATE: 9/30/10
END DATE: 9/30/10
TOC ELEV.: 911.02' NAVD 88
GROUND ELEV.: approx. 911.5'
STATIC WATER LVL.: 10.11' btoc

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Jake
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: MW-127s is located approx. 10' west of MW-127d. Descriptions based on MW-127d.
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 1 of 1

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/ Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

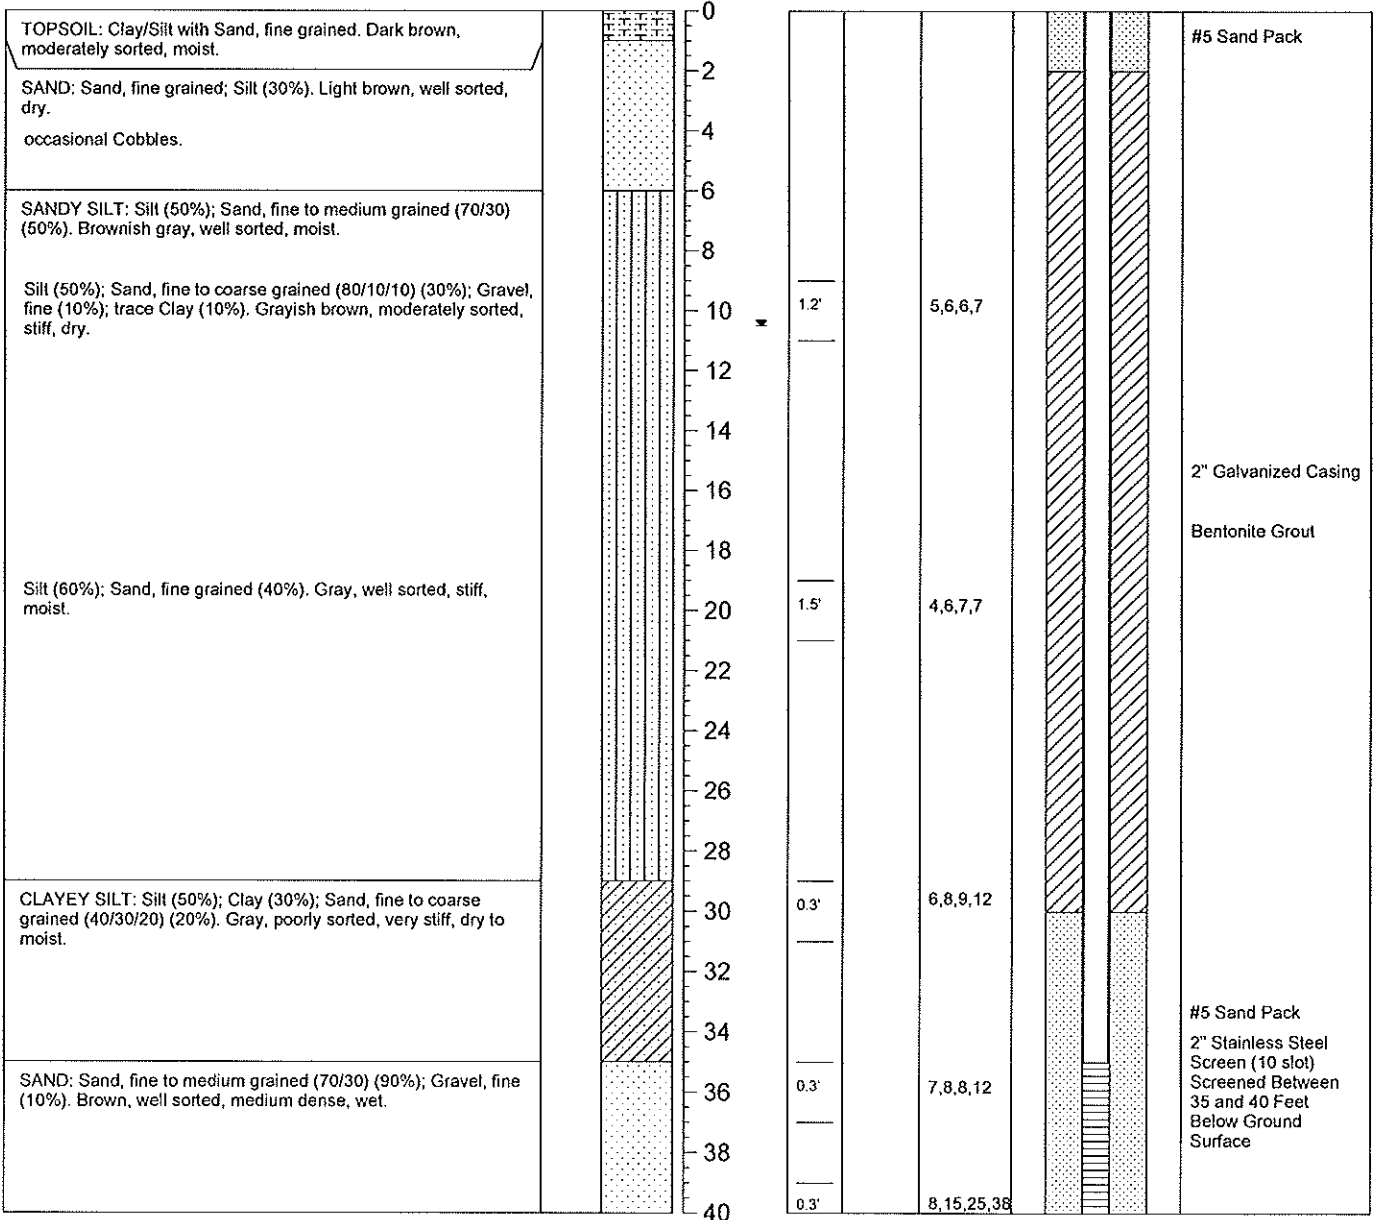



engineers • scientists • architects • constructors
Fishbeck, Thompson, Carr & Huber, Inc.

BOREHOLE LOG

BORING/WELL ID: MW-127d (PLS-10-05)

TOTAL DEPTH (ft.): 215'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Brad Peuler, CPG/Todd C. Campbell, CPG

START DATE: 9/21/2010
END DATE: 9/29/10
TOC ELEV.: 911.63' NAVD 88
GROUND ELEV.: approx. 912'
STATIC WATER LVL.: 32.35' btoc

DRILLING CO.: Steams Drilling
DRILLER: Jerry, Ralph, Jake
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N42.27407, W.083.80807, acc. 40'. Approx. 750' west sw of Caretaker's cabin.
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

▼ Static Water Level Page 1 of 5

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	-----------------	-----------	-------------	--------------------------

TOPSOIL: Clay/Silt with Sand, fine grained. Dark brown, moderately sorted, moist.

SAND: Sand, fine grained; Silt (30%). Light brown, well sorted, dry. occasional Cobbles.

SANDY SILT: Silt (50%); Sand, fine to medium grained (70/30) (50%). Brownish gray, well sorted, moist.



Silt (50%); Sand, fine to coarse grained (80/10/10) (30%); Gravel, fine (10%); trace Clay (10%). Grayish brown, moderately sorted, stiff, dry.

Silt (60%); Sand, fine grained (40%). Gray, well sorted, stiff, moist.

CLAYEY SILT: Silt (50%); Clay (30%); Sand, fine to coarse grained (40/30/20) (20%). Gray, poorly sorted, very stiff, dry to moist.

SAND: Sand, fine to medium grained (70/30) (90%); Gravel, fine (10%). Brown, well sorted, medium dense, wet. Driller notes interbedded Silt seams throughout.

DIAMICTON: Silt (60%); Sand, fine grained (20%); Gravel, fine (10%); Clay (10%). Gray, poorly sorted, hard, dry.

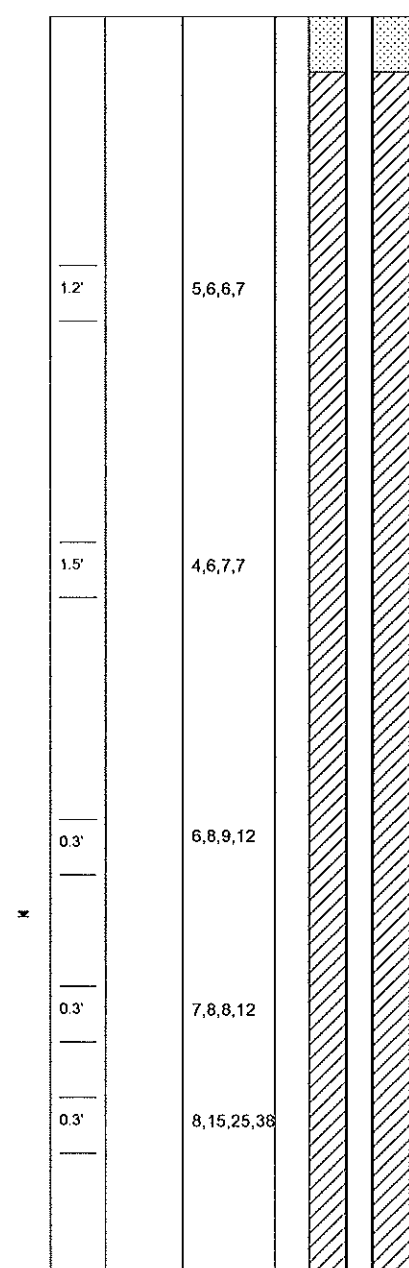

#5 Sand Pack
PLS-10-05 grouted with bentonite. MW-127d installed 5' east of boring.

2" Galvanized Casing

Bentonite Grout



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-127d (PLS-10-05)

TOTAL DEPTH (ft.): 215'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Brad Peuler, CPG/Todd C. Campbell, CPG


START DATE: 9/21/2010
END DATE: 9/29/10
TOC ELEV.: 911.65' NAVD 88
GROUND ELEV.: approx. 912'
STATIC WATER LVL.: 32.35' btoc

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Jake
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N42.27407, W.083.80807, acc. 40'. Approx. 750' west sw of Caretaker's cabin.
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 3 of 5

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/ Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

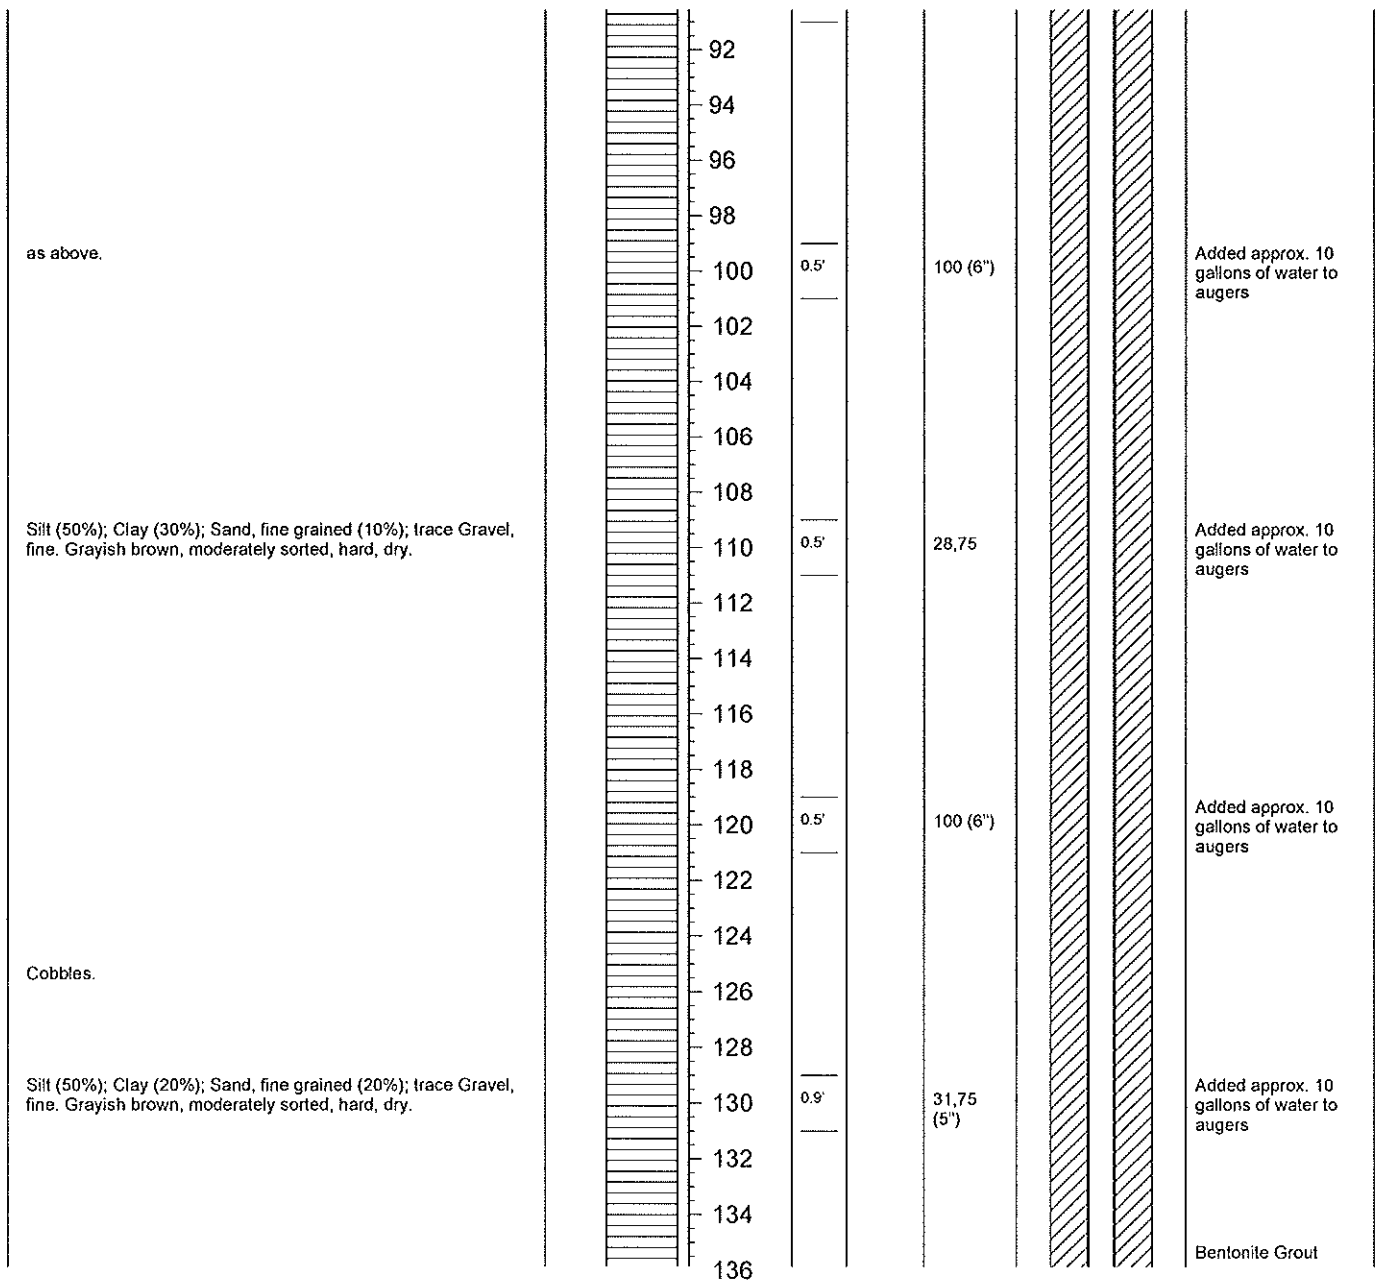



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-127d (PLS-10-05)

TOTAL DEPTH (ft.): 215'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Brad Peuler, CPG/Todd C. Campbell, CPG

START DATE: 9/21/2010
END DATE: 9/29/10
TOC ELEV.: 911.65' NAVD 88
GROUND ELEV.: approx. 912'
STATIC WATER LVL.: 32.35' btoc

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Jake
RIG TYPE: CME 9S
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N42.27407, W.083.80807, acc. 40'. Approx. 750' west sw of Caretaker's cabin.
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

Static Water Level Page 4 of 5

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/ Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	------------------	-----------	-------------	--------------------------

Silt/Clay (50/50). Grayish brown, well sorted, hard, dry.			136					
			138					
			140	1.3'			21,51,50 (3")	
			142					
			144					
			146					
			148					
			150	1.4'			39,75 (5")	2" Galvanized Casing
			152					
			154					
		156						
		158						
		160	1.4'			15,34,50 (4")		
		162						
		164						
		166						
		168						
as above.		170	0.9'			23,75 (5")	Added approx. 10 gallons of water to augers	
		172						
		174						
		176					Bentonite Grout	
		178						
		180	0.8'			6,10,18	Added approx. 10 gallons of water to augers	



engineers • scientists • architects • constructors
fishbeck, thompson, carr & huber, inc.

BOREHOLE LOG

BORING/WELL ID: MW-127d (PLS-10-05)

TOTAL DEPTH (ft.): 215'

PROJECT: Pall Life Sciences
SITE LOCATION: Ann Arbor, Michigan
PROJECT NO.: F96502
PROJECT MANAGER: Todd C. Campbell, CPG
LOGGED BY: Brad Peuler, CPG/Todd C. Campbell, CPG


START DATE: 9/21/2010
END DATE: 9/29/10
TOC ELEV.: 911.65' NAVD 88
GROUND ELEV.: approx. 912'
STATIC WATER LVL.: 32.35' btoc

DRILLING CO.: Stearns Drilling
DRILLER: Jerry, Ralph, Jake
RIG TYPE: CME 95
METHOD OF DRILLING: Hollow Stem Auger
SAMPLING METHODS: Split spoon, Simulprobe

NOTES: Field GPS N42.27407, W.083.80807, acc. 40'. Approx. 750' west sw of Caretaker's cabin.
Copyright 2010. All Rights Reserved. Fishbeck, Thompson, Carr & Huber

▼ Static Water Level Page 5 of 5

DESCRIPTION	PID ppm	GRAPHIC LOG	DEPTH (ft. bgl)	Static Water Level	Sample/Recovery	Sample ID	Blow Counts	WELL CONSTRUCTION DETAIL
-------------	---------	-------------	-----------------	--------------------	-----------------	-----------	-------------	--------------------------

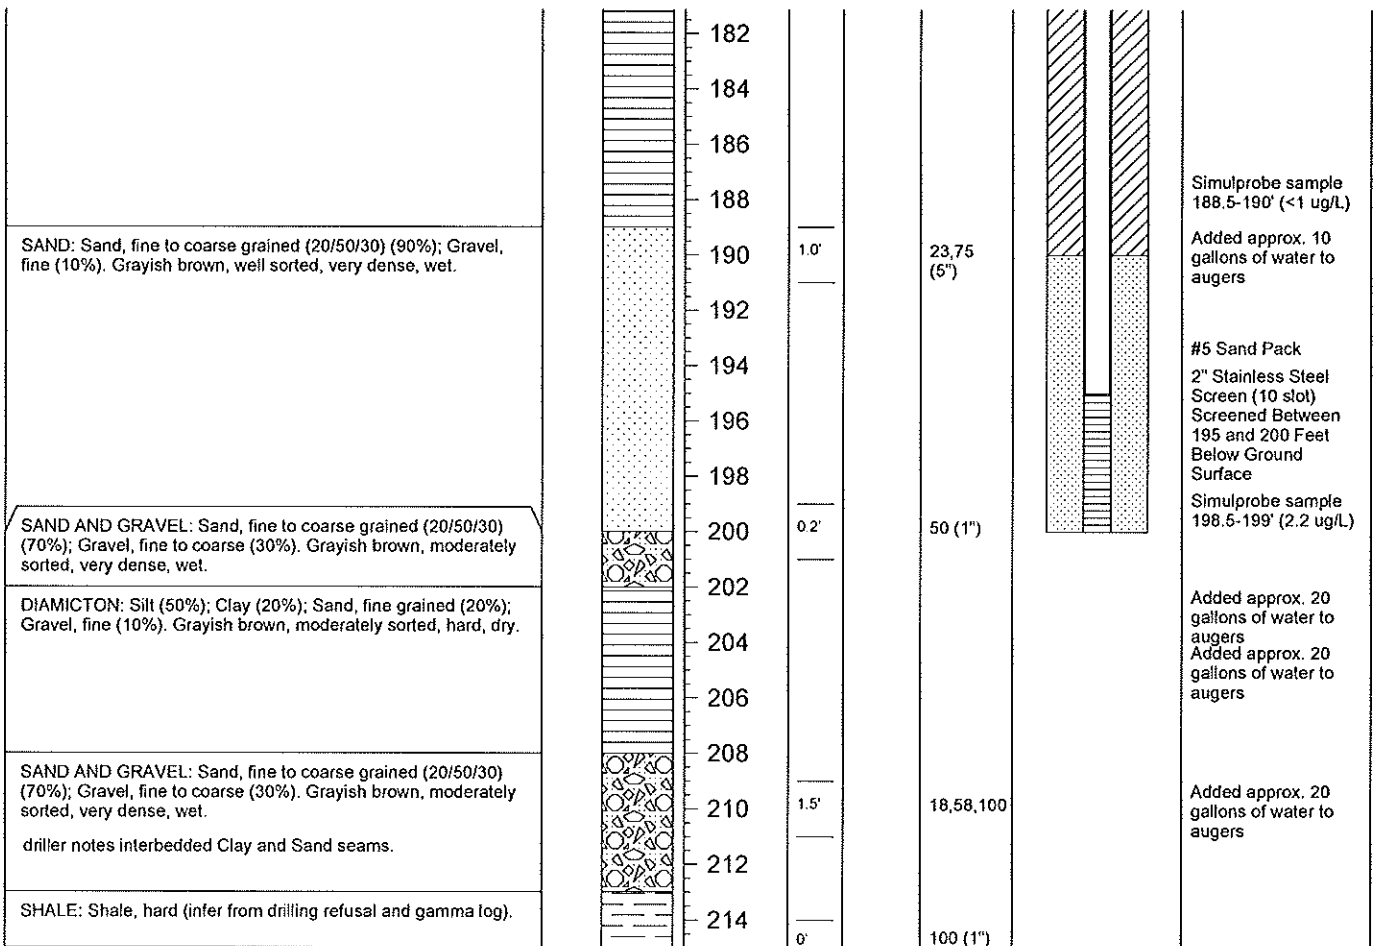

Appendix 1

Appendix 2

Pall Life Sciences

Southwest Property/Saginaw Forest Property Areas

Water Level Data - October 7, 2010

Well ID	Time	Reading	Top of Casing (feet NAVD88)	Water Level Elev. (feet NAVD88)
Shallow Wells				
MW-8d	11:10	47.93	931.77	883.84
MW-10d	11:43	35.7	913.83	878.13
MW-18d	11:52	37.97	916.92	878.95
MW-18s	11:50	14.55	916.73	902.18
MW-20	11:05	29.69	910.66	880.97
MW-22	11:48	44.11	922.85	878.74
MW-28	8:30	36.44	916.92	880.48
MW-37	11:55	44.36	926.59	882.23
MW-38s	12:05	36.98	917.34	880.36
MW-39s	11:00	28.91	908.67	879.76
MW-44	8:20	31.31	911.22	879.91
MW-45d	11:45	30.45	911.38	880.93
MW-48	11:20	40.89	920.75	879.86
MW-49	11:27	39.6	923.92	884.32
MW-50	11:40	28.84	908.92	880.08
MW-56s	8:35	45.62	924.87	879.25
MW-57	11:15	47.02	926.58	879.56
MW-58s	11:33	29.03	901.59	872.56
MW-58d	11:35	29.38	901.27	871.89
MW-62s	8:55	27.35	910.42	883.07
MW-63s	8:48	29.66	913.12	883.46
MW-75	11:24	46.4	924.68	878.28
MW-78	10:20	15.24	912.65	897.41
MW-125	10:15	24.02	909.97	885.95
MW-126s	10:50	35.54	915.57	880.03
MW-127s	10:00	9.75	911.02	901.27

Deep Wells (Unit E)				
MW-56d	8:36	45.47	924.81	879.34
MW-62d	8:58	30.46	910.74	880.28
MW-63d	8:47	31.61	912.09	880.48
MW-64	11:59	54.66	931.11	876.45
MW-65i	9:33	53.5	928.87	875.37
MW-65s	9:35	53.62	928.95	875.33
MW-65d	9:30	53.19	928.49	875.30
MW-66	12:01	34.13	911.25	877.12
MW-68	9:15	63.78	945.26	881.48
MW-95	9:25	41.13	914.95	873.82
MW-126d	10:52	35.13	915.11	879.98
MW-127d	10:03	32.61	911.65	879.04
Saginaw Forest #1	10:25	34.01	913.44	879.43
Saginaw Forest #2	10:23	31.63	911.11	879.48

ATWELL, LLC
PALL WELL SURVEY
6000165

MONITORING WELLS (OCTOBER 18, 2010)			
WELL NO.	NORTHING (SPC MI S)	EASTING (SPC MI S)	ELEVATION (TOP OF CASING) (NAVD 88)
TOP OF WATER	--	--	904.16
MW 125	282,843.57	13,275,136.95	909.97
MW 127D	282,611.91	13,274,498.42	911.65
MW 127S	282,613.86	13,274,488.21	911.02
MW 126S	284,104.04	13,272,836.24	915.57
MW 126D	284,106.00	13,272,833.58	915.11
MW 124D	285,507.59	13,291,717.62	853.88
MW 124S	285,512.39	13,291,717.34	854.28

Appendix 3

Analytical Data Report

Printed On: Wednesday, November 10, 2010

Well Name: MW-125

Aquifer: C3	Date Installed: 8/31/2010	Boring Depth: 175.00 Feet bgl	Screen 1: 65.00 to 70.00 Feet
Map Location: Q-14	Well Driller: Stearns Drilling	Ground Elevation: Feet	Screen 1 Length: 5.00 Feet
X Coordinate: 13275136.95	Well Type: Monitoring Wells	TOC Elevation: 909.97 Feet amsl	Screen 2: to Feet
Y Coordinate: 282843.57	Sampling Interval: Quarterly	TOC to screen bottom: Feet	
Comments:			

Date and Time Collected		1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
09/13/2010	11:20	801	1.0	PLS		5.0	PLS		10.0	PLS	10:15	25.19	
10/07/2010			1.0	PLS		5.0	PLS		10.0	PLS	10:15	24.02	
10/18/2010	10:55	229	1.0	PLS		5.0	PLS		10.0	PLS	10:30	24.15	

Analytical Data Report

Printed On: Wednesday, November 10, 2010

Well Name: MW-127s

Aquifer: C3	Date Installed: 9/30/2010	Boring Depth: 40.00 Feet bgl	Screen 1: 35.00 to 40.00 Feet
Map Location: R-14	Well Driller: Stearns Drilling	Ground Elevation: Feet	Screen 1 Length: 5.00 Feet
X Coordinate: 13274488.21	Well Type: Monitoring Wells	TOC Elevation: 911.02 Feet amsl	Screen 2: to Feet
Y Coordinate: 282613.86	Sampling Interval: Quarterly	TOC to screen bottom: Feet	
Comments: Saginaw Forest			

Date and Time Collected		1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
10/07/2010			1.0	PLS		5.0	PLS		10.0	PLS	10:00	9.75	
10/18/2010	14:25	nd	1.0	PLS		5.0	PLS		10.0	PLS	14:05	9.94	

Analytical Data Report

Printed On: Wednesday, November 10, 2010

Well Name: MW-127d

Aquifer: E	Date installed: 9/29/2010	Boring Depth: 215.00 Feet bgl	Screen 1: 195.00 to 200.00 Feet
Map Location: R-14	Well Driller: Stearns Drilling	Ground Elevation: Feet	Screen 1 Length: 5.00 Feet
X Coordinate: 13274498.42	Well Type: Monitoring Wells	TOC Elevation: 911.65 Feet amsl	Screen 2: to Feet
Y Coordinate: 282611.91	Sampling Interval: Quarterly	TOC to screen bottom: Feet	
Comments: Saginaw Forest			

Date and Time Collected		1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
10/07/2010			1.0	PLS		5.0	PLS		10.0	PLS	10:03	32.61	
10/18/2010	13:55	nd	1.0	PLS		5.0	PLS		10.0	PLS	12:55	32.63	

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #1

Aquifer: E	Date Installed: 6/8/1970	Boring Depth: Feet bgl	Screen 1: to Feet
Map Location: Q-14	Well Driller:	Ground Elevation: 911.50 Feet	Screen 1 Length: 4.00 Feet
X Coordinate: 13275076.05	Well Type: Residential Wells	TOC Elevation: 913.44 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 132.00 Feet	
Comments:			

Date and Time Collected	1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
12/14/1999	nd	1.0										
03/17/2000	7	1.0										
03/27/2000	8	1.0										
04/27/2000	6	1.0										
05/31/2000	9	1.0										
06/27/2000	7	1.0										
07/19/2000	8	1.0										
08/30/2000	8	1.0										
09/26/2000	10	1.0										
10/24/2000	9	1.0										
11/30/2000	See Comments	1.0										Sample broken.
12/01/2000	11	1.0										
12/20/2000	17:45	12	1.0									
02/08/2001	17:25	14	1.0									
05/10/2001	17:40	14	1.0									
07/24/2001	8:25	21	1.0									
10/01/2001			1.0								31.95	
10/01/2001	7:30	18	1.0	PLS								
04/11/2002	7:24	14	1.0	PLS								
07/18/2002	7:40	14	1.0	PLS								
08/21/2002			1.0								41.23	
09/10/2002	7:40	22	1.0	PLS								
10/16/2002	7:30	25	1.0	PLS								
01/09/2003			1.0								33.42	

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #1

Aquifer: E	Date Installed: 6/8/1970	Boring Depth: Feet bgl	Screen 1: to Feet
Map Location: Q-14	Well Driller:	Ground Elevation: 911.50 Feet	Screen 1 Length: 4.00 Feet
X Coordinate: 13275076.05	Well Type: Residential Wells	TOC Elevation: 913.44 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 132.00 Feet	
Comments:			

Date and Time Collected	1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
05/28/2003		1.0								9:20	33.91	
09/08/2003	11:19	30	1.0	PLS						10:27	34.53	
10/13/2003	10:59	31	1.0	PLS						8:21	34.6	
01/02/2004			1.0	PLS						15:01	34.52	
03/08/2004			1.0	PLS						9:13	34.7	
04/16/2004	10:26	45	1.0	PLS						9:49	34.43	
09/15/2004			1.0	PLS						8:48	35.1	
10/22/2004	9:53	42	1.0	PLS						8:53	34.84	
03/14/2005			1.0	PLS						8:56	34.93	
04/21/2005	11:16	44	1.0	PLS	10.0	PLS				10:14	34.87	
09/13/2005			1.0	PLS	5.0	PLS		10.0	PLS	8:40	34.56	
11/07/2005	16:43	49	1.0	PLS	5.0	PLS		10.0	PLS	16:12	34.71	
01/10/2006			1.0	PLS	5.0	PLS		10.0	PLS	13:19	35.64	
03/20/2006			1.0	PLS	5.0	PLS		10.0	PLS	8:37	35.13	
05/18/2006	12:30	44	1.0	PLS	5.0	PLS		10.0	PLS	11:30	35.01	
06/15/2006			1.0	PLS	5.0	PLS		10.0	PLS	11:45	35.28	
09/15/2006			1.0	PLS	5.0	PLS		10.0	PLS	9:01	35.44	
10/16/2006	9:40	42	1.0	PLS	5.0	PLS		10.0	PLS	8:20	35.33	
02/22/2007			1.0	PLS	5.0	PLS		10.0	PLS	9:55	34.54	
03/13/2007			1.0	PLS	5.0	PLS		10.0	PLS	8:50	34.46	
05/18/2007	8:30	37	1.0	PLS	5.0	PLS		10.0	PLS	7:20	34.52	
09/13/2007			1.0	PLS	5.0	PLS		10.0	PLS	10:25	34.61	
10/25/2007	9:45	34	1.0	PLS	5.0	PLS		10.0	PLS	8:40	34.94	
02/25/2008			1.0	PLS	5.0	PLS		10.0	PLS	9:32	34.36	
07/31/2008	10:40	31	1.0	PLS	5.0	PLS		10.0	PLS	8:50	34.51	
09/17/2008			1.0	PLS	5.0	PLS		10.0	PLS	9:20	34.54	
03/17/2009			1.0	PLS	5.0	PLS		10.0	PLS	9:59	33.7	
08/19/2009	9:45	32	1.0	PLS	5.0	PLS		10.0	PLS	8:45	33.81	
09/24/2009			1.0	PLS	5.0	PLS		10.0	PLS	10:17	33.65	
03/09/2010			1.0	PLS	5.0	PLS		10.0	PLS	9:05	33.99	
08/06/2010	9:15	27	1.0	PLS	5.0	PLS		10.0	PLS	8:20	33.96	
09/01/2010			1.0	PLS	5.0	PLS		10.0	PLS	9:24	34.16	

NSP= No sample taken nd=Not detected at or above the reporting limit ppb= parts per billion

© Copyright 2006 by Pall Corporation. All rights reserved.

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #1


Aquifer: E	Date Installed: 6/8/1970	Boring Depth: Feet bgl	Screen 1: to Feet
Map Location: Q-14	Well Driller:	Ground Elevation: 911.50 Feet	Screen 1 Length: 4.00 Feet
X Coordinate: 13275076.05	Well Type: Residential Wells	TOC Elevation: 913.44 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 132.00 Feet	
Comments:			

Date and Time Collected	1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
10/07/2010		1.0	PLS		5.0	PLS		10.0	PLS	10:25	34.01	

Analytical Data Graph

Well Name: Saginaw Forest Cabin #1

Aquifer: E	Date Installed: 6/8/1970	Boring Depth: Feet bgl	Screen 1: to Feet
Map Location: Q-14	Well Driller:	Ground Elevation: 911.50 Feet	Screen 1 Length: 4.00 Feet
X Coordinate: 13275076.05	Well Type: Residential Wells	TOC Elevation: 913.44 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 132.00 Feet	
Comments:			

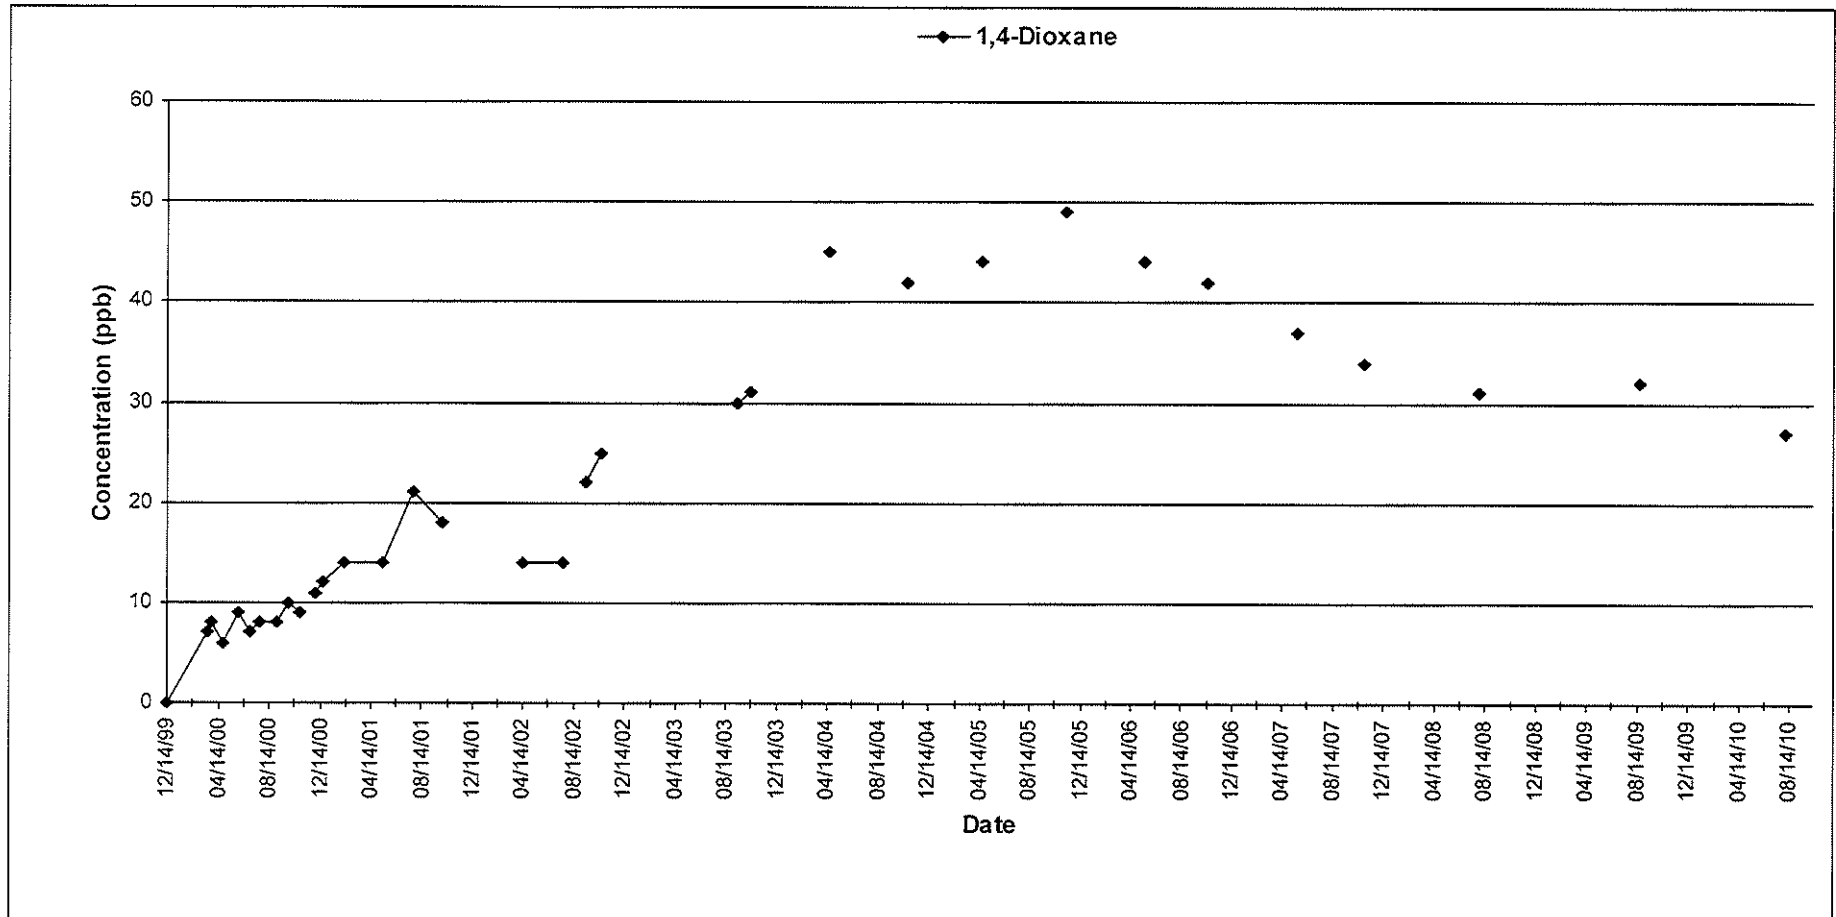

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #2

Aquifer: E	Date Installed: 1/17/2001	Boring Depth: 216.00 Feet bgl	Screen 1: 195.00 to 203.00 Feet
Map Location: Q-14	Well Driller: Cribley Drilling	Ground Elevation: 909.00 Feet	Screen 1 Length: 8.00 Feet
X Coordinate: 13275048.05	Well Type: Residential Wells	TOC Elevation: 911.10 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 204.15 Feet	
Comments:			

Date and Time Collected		1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
01/19/2001	11:14	3	1.0									32.38	
01/22/2001	15:47	2	1.0										
01/24/2001	10:00	3	1.0								8:53	32.72	
02/08/2001	17:05	2	1.0								15:53	32.62	
04/24/2001	14:40	4	1.0								13:30	31.79	
06/11/2001		NSP	1.0								14:16	29.15	
06/14/2001	17:41	2	1.0										
07/24/2001			1.0								8:33	29.73	
07/24/2001	9:48	3	1.0										
07/30/2001			1.0								11:20	29.5	
10/01/2001			1.0								7:38	29.5	
10/01/2001	8:58	nd	1.0	PLS									
04/04/2002			1.0								9:33	29.13	
04/11/2002	8:05	1	1.0	PLS									
07/02/2002			1.0								8:25	30.25	
07/18/2002	9:54	See Comments	1.0										Resampled due to matrix interference.
08/15/2002	10:37	See Comments	1.0									30.15	No sample results- matrix interference.
09/10/2002			1.0									30.88	
09/10/2002	9:00	2	1.0	PLS									
10/02/2002			1.0									30.92	
10/24/2002	14:11	3	1.0	PLS									
01/09/2003			1.0									31.02	
01/22/2003	8:49	6	1.0	PLS									
04/02/2003			1.0								9:46	33.84	

NSP= No sample taken nd=Not detected at or above the reporting limit ppb= parts per billion

© Copyright 2006 by Pall Corporation. All rights reserved.

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #2

Aquifer: E	Date Installed: 1/17/2001	Boring Depth: 216.00 Feet bgl	Screen 1: 195.00 to 203.00 Feet
Map Location: Q-14	Well Driller: Cribley Drilling	Ground Elevation: 909.00 Feet	Screen 1 Length: 8.00 Feet
X Coordinate: 13275048.05	Well Type: Residential Wells	TOC Elevation: 911.10 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 204.15 Feet	
Comments:			

Date and Time Collected	1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
04/30/2003 8:16	5	1.0	PLS									
05/28/2003		1.0								9:25	31.56	
07/02/2003		1.0	PLS							10:41	31.94	
08/11/2003 10:43	4	1.0	PLS									
10/13/2003 8:59	5	1.0	PLS							8:02	32.23	
01/02/2004		1.0	PLS							16:00	32.2	
02/09/2004 9:12	5	1.0	PLS							8:45	32.02	
03/08/2004		1.0	PLS							9:16	32.37	
04/16/2004 9:33	5	1.0	PLS							8:55	32.09	
09/15/2004		1.0	PLS							8:51	32.75	
10/22/2004 11:47	5	1.0	PLS							11:00	32.5	
03/14/2005		1.0	PLS							9:30	32.62	
04/21/2005 9:36	6	1.0	PLS		10.0	PLS				8:26	34.87	
09/13/2005		1.0	PLS		5.0	PLS		10.0	PLS	8:42	32.2	
11/07/2005 15:23	5	1.0	PLS		5.0	PLS		10.0	PLS	14:31	32.38	
01/10/2006		1.0	PLS		5.0	PLS		10.0	PLS	13:22	33.32	
03/20/2006		1.0	PLS		5.0	PLS		10.0	PLS	8:38	32.79	
05/18/2006 14:15	4	1.0	PLS		5.0	PLS		10.0	PLS	13:10	32.66	
06/15/2006		1.0	PLS		5.0	PLS		10.0	PLS	11:47	32.92	
09/15/2006		1.0	PLS		5.0	PLS		10.0	PLS	9:02	33.08	
10/16/2006 12:00	4	1.0	PLS		5.0	PLS		10.0	PLS	10:30	32.94	
02/22/2007		1.0	PLS		5.0	PLS		10.0	PLS	15:20	32.3	
03/13/2007		1.0	PLS		5.0	PLS		10.0	PLS	8:52	32	
05/18/2007 10:45	3	1.0	PLS		5.0	PLS		10.0	PLS	9:25	32.12	
09/13/2007		1.0	PLS		5.0	PLS		10.0	PLS	10:34	32.25	
10/25/2007 11:50	3	1.0	PLS		5.0	PLS		10.0	PLS	10:20	32.65	
02/25/2008		1.0	PLS		5.0	PLS		10.0	PLS	10:21	32.01	
07/31/2008 13:30	2	1.0	PLS		5.0	PLS		10.0	PLS	11:55	31.98	
09/17/2008		1.0	PLS		5.0	PLS		10.0	PLS	9:18	32.14	
03/17/2009		1.0	PLS		5.0	PLS		10.0	PLS	9:58	31.31	
08/19/2009 11:05	2	1.0	PLS		5.0	PLS		10.0	PLS	10:00	31.36	
09/24/2009		1.0	PLS		5.0	PLS		10.0	PLS	10:14	31.26	

NSP= No sample taken nd=Not detected at or above the reporting limit ppb= parts per billi

© Copyright 2006 by Pall Corporation. All rights reserved.

Analytical Data Report

Printed On: Wednesday, October 27, 2010

Well Name: Saginaw Forest Cabin #2


Aquifer: E	Date Installed: 1/17/2001	Boring Depth: 216.00 Feet bgl	Screen 1: 195.00 to 203.00 Feet
Map Location: Q-14	Well Driller: Cribley Drilling	Ground Elevation: 909.00 Feet	Screen 1 Length: 8.00 Feet
X Coordinate: 13275048.05	Well Type: Residential Wells	TOC Elevation: 911.10 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 204.15 Feet	
Comments:			

Date and Time Collected		1,4-dioxane Results (ppb)	R.L.	Lab	Bromate Results	R.L.	Lab	Bromide Results	R.L.	Lab	Static Time	Static Reading	Sample Comments
03/09/2010			1.0	PLS		5.0	PLS		10.0	PLS	9:03	31.62	
08/06/2010	10:10	2	1.0	PLS		5.0	PLS		10.0	PLS	9:20	31.6	
09/01/2010			1.0	PLS		5.0	PLS		10.0	PLS	9:22	31.79	
10/07/2010			1.0	PLS		5.0	PLS		10.0	PLS	10:23	31.63	

Analytical Data Graph

Well Name: Saginaw Forest Cabin #2

Aquifer: E	Date Installed: 1/17/2001	Boring Depth: 216.00 Feet bgl	Screen 1: 195.00 to 203.00 Feet
Map Location: Q-14	Well Driller: Cribley Drilling	Ground Elevation: 909.00 Feet	Screen 1 Length: 8.00 Feet
X Coordinate: 13275048.05	Well Type: Residential Wells	TOC Elevation: 911.10 Feet amsl	Screen 2: 0.00 to 0.00 Feet
Y Coordinate: 282874.16	Sampling Interval: Annual	TOC to screen bottom: 204.15 Feet	
Comments:			

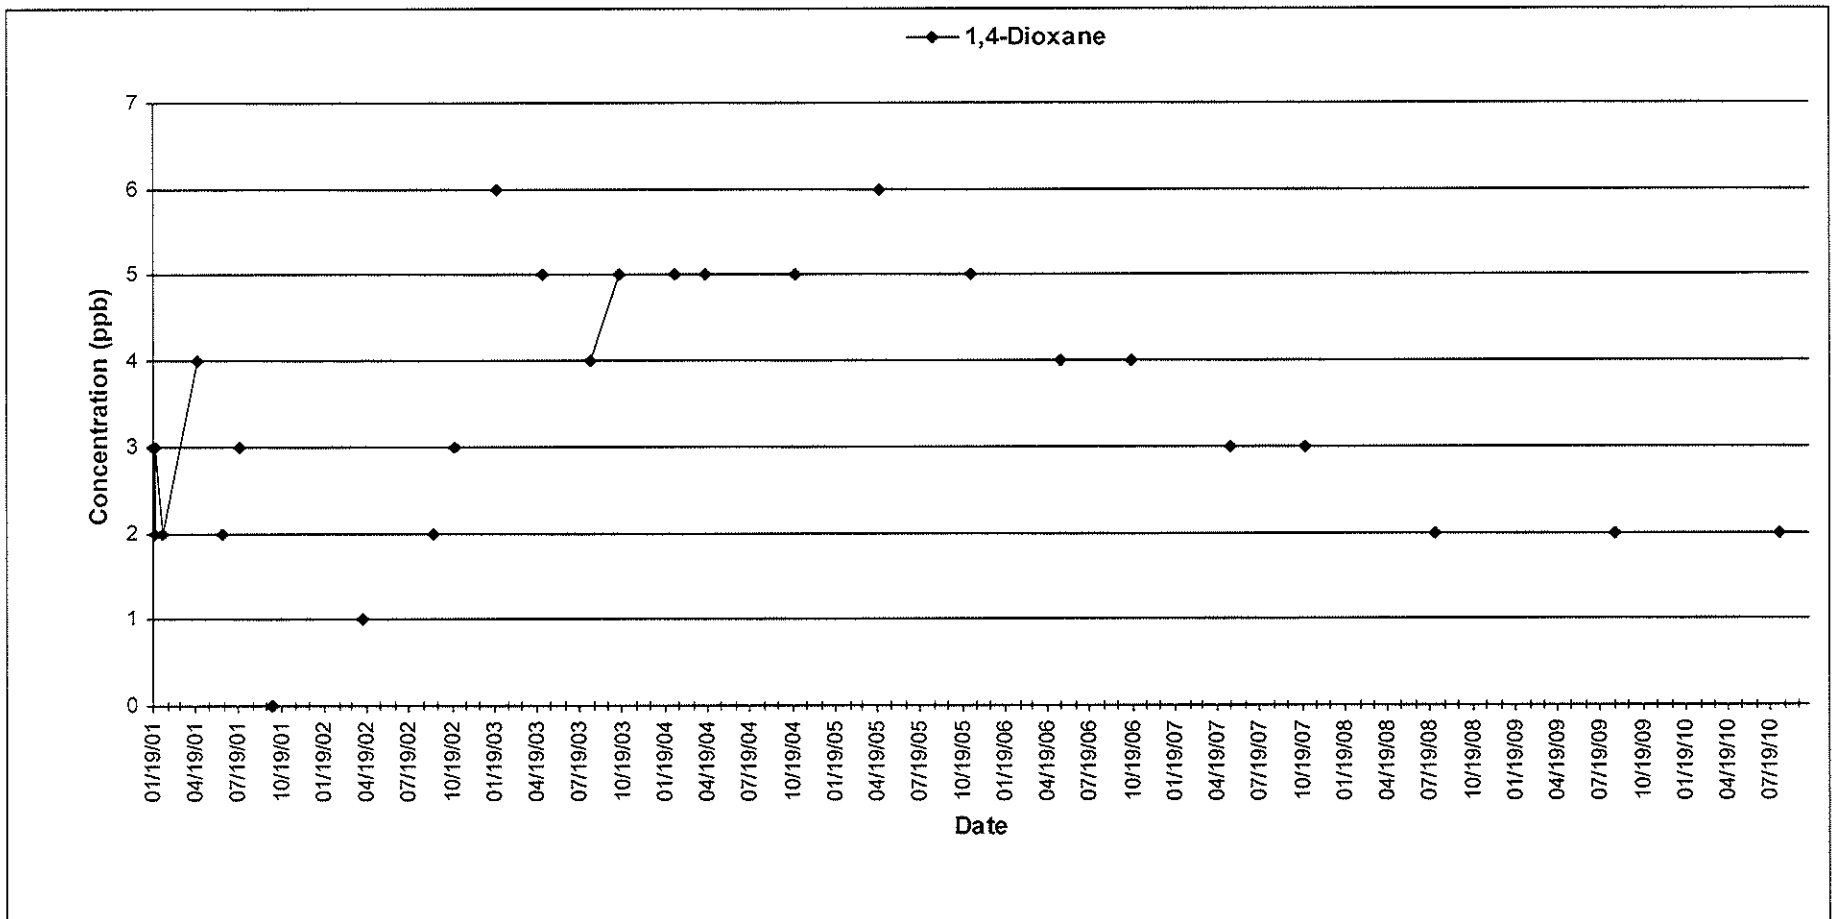

Appendix 4

